

VMware

Exam Questions 3V0-21.23

VMware vSphere 8.x Advanced Design



NEW QUESTION 1

An administrator is tasked with adding two additional hosts into an existing production vSphere cluster to support the need for additional capacity. The vSphere cluster currently has four identically configured ESXi hosts (esx01, esx02, esx03 and esx04) that utilize Intel Skylake-based CPUs. The two new hosts (esx05 and esx06) are configured identically in terms of memory and storage to the existing hosts: but utilize Intel Ice Lake-based CPUs. The administrator must ensure that:

- Any virtual machine migrates to any of the six ESXi hosts running in the cluster.
- There is no virtual machine downtime during the process of adding the new hosts. Which step should the administrator take to meet these requirements?

- A. Create a new vSphere cluster with Enhanced vMotion Compatibility (EVC) enabled and move all hosts into the new cluster
- B. Create a new vSphere cluster and move only three hosts into the new cluster.
- C. Configure Enhanced vMotion Compatibility (EVC) mode on the existing cluster and add the two new hosts into the cluster.
- D. Create a new vSphere cluster with vSphere High Availability (HA) enabled and move all hosts into the new cluster

Answer: C

Explanation:

The step that the administrator should take to meet these requirements is to configure Enhanced vMotion Compatibility (EVC) mode on the existing cluster and add the two new hosts into the cluster. EVC mode allows migration of virtual machines between different generations of CPUs by masking unsupported processor features. EVC mode can be enabled on an existing cluster without affecting powered-on virtual machines. References:

<https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.vcenterhost.doc/GUID-9F444D9B-44A>

<https://blogs.vmware.com/vsphere/2019/06/enhanced-vmotion-compatibility-etc-explained.html>

NEW QUESTION 2

An administrator is required to configure several Microsoft Windows virtual machines (VMs) to support Secure Boot for a critical secure application. The following information is provided:

- The corporate security policy states that all forms of data encryption must utilize a key provider.
- The firmware of each VM is currently set to use Unified Extensible Firmware Interface (UEFI).
- Due to the nature of the application running within the VMs, the guest operating system for each VM is currently a minimum of Windows Server 2008 and Windows 7.

Which security feature should the administrator implement to meet these requirements?

- A. vSphere Virtual Machine Encryption
- B. vSphere Visualization-Based Security
- C. Virtual Intel Software Guard Extensions (vSGX)
- D. Virtual Trusted Platform Module (vTPM)

Answer: D

Explanation:

<https://docs.vmware.com/en/VMware-vSphere/8.0/vsphere-security/GUID-6F811A7A-D58B-47B4-84B4-7339> A vTPM is a virtualized version of a physical TPM and is used to protect VMs and their data by tying the cryptographic functions to the hardware of the server on which the VMs are running¹². This allows for secure boot, disk encryption, and other security features¹². It also supports key providers, which is a requirement in this case¹².

NEW QUESTION 3

An administrator needs to update a VMware vCenter instance to a newer minor release version. Due to restrictions within the environment, the vCenter instance does not have access to the Internet. As a first step, the administrator downloads the required update on another machine.

What are the next steps the administrator must perform to complete the update? A Place the update ISO file in a Virtual Machine File System (VMFS) datastore. ' Use the vSphere Client to select the update ISO file as the source for the update.

- A. Place the update ISO file in a Virtual Machine File System (VMFS) datastore. Use the vSphere Client to select the update ISO file as the source for the update
- B. Mount the ISO update file to the CD-ROM drive of the vCenter instance Use the vCenter Management Interface to select the CD-ROM as the source for the update
- C. Place the ISO update file in a folder accessible to the vCenter instance over HTTPS. Use the vCenter Management Interface to select the update file as the source for the update
- D. Place the ZIP update file in a folder accessible to the vCenter instance over HTTPS Use the vSphere Client to select the update file as the source for the update.

Answer: B

Explanation:

<https://4sysops.com/archives/three-ways-to-update-vmware-vcenter-server-appliance-vcsa/>

NEW QUESTION 4

An administrator has mapped three vSphere zones to three vSphere clusters.

Which two statements are true for this vSphere with Tanzu zonal Supervisor enablement? (Choose two.)

- A. One Supervisor will be created in a specific zone.
- B. One Supervisor will be created across all zones.
- C. Three Supervisors will be created in Linked Mode.
- D. Individual vSphere Namespaces will be placed into a specific zone.
- E. Individual vSphere Namespaces will be spread across all zones.

Answer: BE

Explanation:

For a vSphere with Tanzu zonal Supervisor enablement where three vSphere zones are mapped to three vSphere clusters, the following two statements are true:

- B. One Supervisor will be created across all zones. In a three-zone deployment, all three vSphere clusters become one Supervisor.

E. Individual vSphere Namespaces will be spread across all zones. You can distribute the nodes of your Tanzu Kubernetes Grid clusters across all three vSphere zones, thus providing HA for your Kubernetes workloads at a vSphere cluster level.

NEW QUESTION 5

An administrator notices a Fibre Channel adapter in an ESXi host has been experiencing inconsistent connectivity states. Which trigger can be used to quickly identify the issue and alert the administrator so that the issue can be resolved?

- A. Host Connection Lost
- B. Lost Network Path Redundancy
- C. Lost Network Connectivity
- D. Lost Storage Connectivity

Answer: D

Explanation:

<https://kb.vmware.com/s/article/2014553>

Book course: 6-23 Fibre Channel SAN Components Using SAN switches, you can set up path redundancy to address any path failures from host server to switch, or from storage array to switch. 6-25 Multipathing with Fibre Channel By default, ESXi hosts use only one path from a host to a given LUN at any one time. If the path actively being used by the ESXi host fails, the server selects another available path.

The trigger that can be used to quickly identify the issue and alert the administrator so that the issue can be resolved is:

Lost Storage Connectivity

This alert is triggered when an ESXi host loses connectivity to storage devices. In this case, it would alert the administrator to the inconsistent connectivity states of the Fibre Channel adapter12.

NEW QUESTION 6

An administrator is working with VMware Support and is asked to provide log bundles for the ESXi hosts in an environment. Which three options does the administrator have? (Choose three.)

- A. Generate a combined log bundle for all ESXi hosts using the vCenter Management Interface.
- B. Generate a separate log bundle for each ESXi host using the vSphere Host Client.
- C. Generate a combined log bundle for all ESXi hosts using the vSphere Client.
- D. Generate a separate log bundle for each ESXi host using the vSphere Client.
- E. Generate a separate log bundle for each ESXi host using the vCenter Management Interface.
- F. Generate a combined log bundle for all ESXi hosts using the vSphere Host Client.

Answer: BCD

Explanation:

Option B, C and D are correct because they are valid methods to generate log bundles for individual or multiple ESXi hosts using different interfaces. Option A and E are incorrect because they are not possible options to generate log bundles for all ESXi hosts using the vCenter Management Interface. Option F is incorrect because it is not possible to generate a combined log bundle for all ESXi hosts using the vSphere Host Client. References:

<https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.troubleshooting.doc/GUID-9A94C3D1>

NEW QUESTION 7

An administrator is tasked with applying updates to a vSphere cluster running vSAN using vSphere Lifecycle Manager. Downtime to the ESXi hosts must be minimal while the work is completed.

The administrator has already completed the following steps and no errors have been returned:

- Downloaded all applicable software and created a new Image
- Attached the new Image to the cluster and run a compliance check against the Image for the cluster
- Ran a remediation pre-check for the cluster

Which two series of steps should the administrator perform to start the remediation of the cluster using the new image? (Choose two.)

- A. * 1. Use the Remediate option in vSphere Lifecycle Manager to remediate all of the ESXi hosts in the cluster in parallel.* 2. Allow vSphere Lifecycle Manager to automatically control maintenance mode on the ESXi hosts.
- B. * 1. Place each of the ESXi hosts into maintenance mode manually.* 2. Use the Stage option in vSphere Lifecycle Manager to stage the required software on all ESXi hosts one at a time.
- C. * 1. Leave all ESXi hosts in the cluster operational.* 2. Use the Stage All option in vSphere Lifecycle Manager to stage the required software onto all ESXi hosts one at a time.
- D. * 1. Leave all ESXi hosts in the cluster operational* 2. Use the Stage All option in vSphere Lifecycle Manager to stage the required software onto all ESXi hosts in the cluster in parallel.
- E. * 1. Use the Remediate Option in vSphere Lifecycle Manager to remediate all of the ESXi hosts in the cluster in sequence.* 2. Allow vSphere Lifecycle Manager to automatically control maintenance mode on the ESXi host

Answer: AD

Explanation:

Option A and D are correct because they allow vSphere Lifecycle Manager to automatically control maintenance mode on the ESXi hosts and remediate them in parallel or in sequence. Option B and C are incorrect because they require manual intervention to place the hosts into maintenance mode or to stage the software on each host, which is not efficient or minimal downtime. References: <https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere-lifecycle-manager.doc/GUID-9F9E3F8>

NEW QUESTION 8

Following a merger with another company, an administrator is tasked with configuring an identity source for VMware vCenter so that all vSphere administrators can authenticate using their existing Active Directory accounts. Each company has user accounts in their own Active Directory forests.

The following additional information has been provided:

- The corporate policy states that only Windows-based machine accounts are allowed in Active Directory. Which action should the administrator take to configure vCenter Single Sign-On (SSO) to meet this requirement?

- A. Configure SSO to use Active Directory over LDAP as the identity source.
- B. Configure SSO to use OpenLDAP as the identity source.
- C. Join the vCenter Server Appliance to the LDAP domain.
- D. Configure SSO to use Active Directory (Integrated Windows Authentication) as the identity source.

Answer: A

Explanation:

Integrated Windows Authentication is now depreciated (from v7). "The Active Directory over LDAP identity source is preferred over the Active Directory (Integrated Windows Authentication) option." <https://kb.vmware.com/s/article/78506>

NEW QUESTION 9

What is the role of vSphere Distributed Services Engine?

- A. Provide a live shadow Instance of a virtual machine (VM) that mirror, the primary VM to prevent data loss and downtime during outages
- B. Implement Quality of Service (QoS) on network traffic within a vSphere Distributed Switch
- C. Provide hardware accelerated data processing to boost infrastructure performance
- D. Redistribute virtual machines across vSphere cluster host affinity rules following host failures or during maintenance operations

Answer: C

Explanation:

The role of vSphere Distributed Services Engine is to provide hardware accelerated data processing to boost infrastructure performance by offloading network services from the CPU to the DPU.

References: <https://core.vmware.com/resource/whats-new-vsphere-8>

NEW QUESTION 10

What are three options an administrator can configure after creating a vSphere Namespace? (Choose three.)

- A. Backup schedule
- B. Certificates
- C. Storage policies
- D. Update policies
- E. Permissions
- F. Resource and Object limits

Answer: CEF

Explanation:

After creating a vSphere Namespace, three of the options that an administrator can configure are storage policies, which define how storage resources are allocated for objects within a namespace; permissions, which define who can access and manage objects within a namespace; and resource and object limits, which define how much CPU, memory, storage, and network resources can be consumed by objects within a namespace.

References:

<https://docs.vmware.com/en/VMware-vSphere/7.0/vmware-vsphere-with-tanzu/GUID-C2E9B5C1-D6F1-4E9B>

<https://docs.vmware.com/en/VMware-vSphere/8.0/vsphere-with-tanzu-services-workloads/GUID-177C23C4-E>

NEW QUESTION 10

An administrator is tasked with deploying a new on-premises software-defined data center (SDDC) that will contain a total of eight VMware vCenter instances. The following requirements must be met:

- All vCenter instances should be visible in a single vSphere Client session.
- All vCenter inventory should be searchable from a single vSphere Client session.
- Any administrator must be able to complete operations on any vCenter instance using a single set of credentials.

What should the administrator configure to meet these requirements?

- A. Two Enhanced Linked Mode groups consisting of four vCenter instances each in a Single Sign-On domain.
- B. A single Hybrid Linked Mode group consisting of four vCenter instances each in a Single Sign-On domain.
- C. A single Enhanced Linked Mode group consisting of eight vCenter instances in one Single Sign-On domain.
- D. A single Hybrid Linked Mode group consisting of eight vCenter instances in one Single Sign-On domain.

Answer: B

Explanation:

To meet the requirements of viewing and searching all vCenter instances and inventory with a single vSphere Client session and a single set of credentials, the administrator needs to configure a single Enhanced Linked Mode group consisting of eight vCenter instances in one Single Sign-On domain.

References:

<https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.vcenterhost.doc/GUID-39A8C7F4-8D8>

<https://docs.vmware.com/en/VMware-vSphere/8.0/vsphere-vcenter-installation/GUID-4394EA1C-0800-4A6A->

NEW QUESTION 15

An administrator is tasked with implementing a backup solution capable of backing up the Supervisor cluster, vSphere Pods, and persistent volumes.

Which two solutions must be used to meet this requirement? (Choose two.)

- A. VMware vCenter
- B. Standalone Velero and Restic
- C. NSX-T Manager
- D. vSphere Host Client
- E. Velero Plugin for vSphere

Answer: BE

Explanation:

<https://docs.vmware.com/en/VMware-vSphere/7.0/vmware-vmware-with-tanzu/GUID-9816E07A-466C-451D-A>

NEW QUESTION 17

An administrator needs better performance and near-zero CPU utilization from the ESXi hosts for networking functions and processing. The administrator creates a new vSphere Distributed Switch and enables network offloads compatibility. Which solution would help achieve this goal?

- A. vSphere Distributed Services Engine
- B. Data Processing Units (DPUs)
- C. vSphere Network I/O Control
- D. Universal Passthrough version 2

Answer: B

Explanation:

The solution that would help achieve better performance and near-zero CPU utilization from the ESXi hosts for networking functions and processing is Data Processing Units (DPUs), which are specialized processors that offload network services from the CPU and provide hardware acceleration.
<https://docs.vmware.com/en/VMware-vSphere/8.0/vsphere-networking/GUID-41AB1101-D943-490A-BF1A-E>

NEW QUESTION 20

An administrator has a requirement to revert a running virtual machine to a previous snapshot after a failed attempt to upgrade an application. When the administrator originally took the snapshot, the following choices in the Take Snapshot dialog were made:

- Snapshot the virtual machine's memory = false
- Quiesce guest file system = false

What will be the result of the administrator selecting the 'Revert to Latest Snapshot?' option to return the virtual machine to a previous snapshot? (Choose two.)

- A. The virtual machine will be restored to the parent snapshot
- B. The virtual machine will be restored in a powered off state
- C. The virtual machine will be restored to the child snapshot
- D. The virtual machine will be restored in a powered on state
- E. The virtual machine will be restored in a suspended state

Answer: AB

Explanation:

https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.vm_admin.doc/GUID-3E1BB630-9223

NEW QUESTION 21

An administrator plans to update the Supervisor cluster and has noticed some of the Tanzu Kubernetes Grid clusters are running an incompatible version. Which action must the administrator take before proceeding with the Supervisor cluster update?

- A. Update all Tanzu Kubernetes Grid clusters to the latest version prior to the Supervisor cluster update.
- B. No action is needed - Tanzu Kubernetes Grid clusters will be updated automatically as part of the update process.
- C. No action is needed - Incompatible Tanzu Kubernetes Grid clusters can be manually updated after the Supervisor cluster update.
- D. Update incompatible Tanzu Kubernetes Grid clusters prior to the Supervisor cluster update.


Answer: D

Explanation:

Option D is correct because it indicates that the administrator must update incompatible Tanzu Kubernetes Grid clusters prior to the Supervisor cluster update, as this will ensure that there are no compatibility issues or disruptions during or after the update process. Option A is incorrect because it is not necessary to update all Tanzu Kubernetes Grid clusters to the latest version prior to the Supervisor cluster update, as some clusters may already be compatible with the new version. Option B is incorrect because Tanzu Kubernetes Grid clusters will not be updated automatically as part of the update process, as they require manual intervention from the administrator. Option C is incorrect because incompatible Tanzu Kubernetes Grid clusters cannot be manually updated after the Supervisor cluster update, as they may become inaccessible or unstable due to compatibility issues. References:
<https://docs.vmware.com/en/VMware-vSphere/7.0/vmware-vmware-with-tanzu/GUID-9F9E3F8C-0E2B-4B6A>
<https://docs.vmware.com/en/VMware-vSphere/8.0/vsphere-with-tanzu-maintenance/GUID-292482C2-A5FA-44> If a Tanzu Kubernetes Grid cluster is incompatible with vSphere 8, upgrade the cluster before proceeding with the system upgrade.

NEW QUESTION 26

Refer to the exhibit.

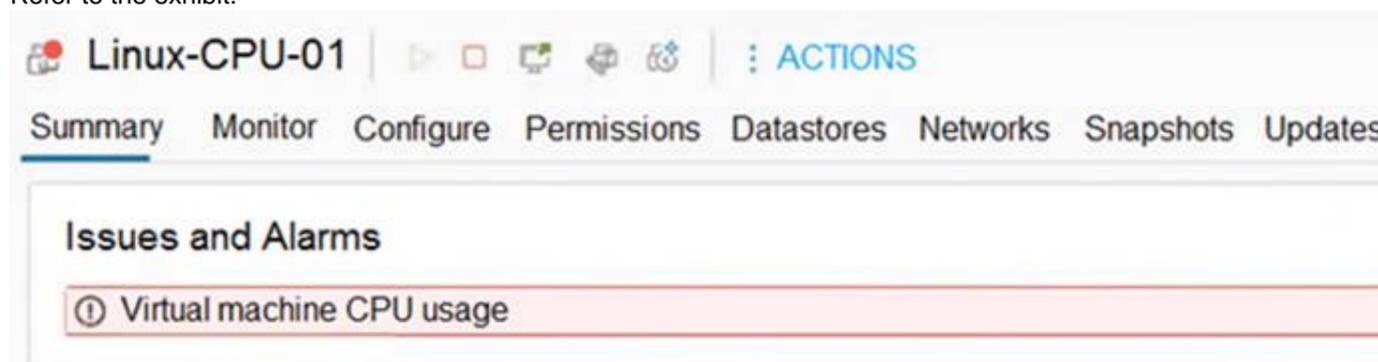

After removing an ESXi host from a cluster for maintenance, a number of virtual machines have encountered the warning seen in the exhibit. After re-adding the ESXi, the issue is resolved. Which step should the administrator take to move the triggered alarm to its normal state?

- A. Ignore
- B. Reset to Green

- C. Acknowledge
- D. Disable

Answer: B

Explanation:

<https://communities.vmware.com/t5/ESXi-Discussions/Alert-on-virtual-machine-that-i-cant-quot-clear-quot-or-r>

NEW QUESTION 27

An administrator is tasked with looking into the disaster recovery (DR) options for a software-defined data center (SDDC).

The following requirements must be met:

- All virtual machines (VMs) must be protected to a secondary site.
- The source VMs must remain online until the failover.
- When failing over to the secondary site, application downtime is allowed
- The DR failover must be managed from the vSphere Client.
- Costs must remain as low as possible.

How can the administrator accomplish this task?

- A. Configure VMware Cloud Disaster Recovery (VCDR) and combine it with array-based storage replication
- B. Configure VMware Site Recovery Manager and combine it with vSphere Replication.
- C. Configure a subscribed content library on the secondary site.
- D. Configure VMware Site Recovery Manager and combine it with array-based storage replication.

Answer: B

Explanation:

<https://blogs.vmware.com/virtualblocks/2017/11/29/vsr-technicaloverview/>

NEW QUESTION 30

An administrator is preparing for a deployment of a new vCenter Server Appliance. The following information has been provided to complete the deployment:

- ESXi Host name (FQDN): esx01.corp.local . ESXi IP Address: 172.20.10.200
- vCenter Server Name (FQDN): vcsc01.corp.local
- vCenter Server IP Address: 172.20.10.100
- NTP Server: 172.20.10.20
- DNS Server: 172.20.10.1
- Deployment Size: Tiny
- Storage Size: Default

Which two actions must the administrator complete before starting the installation of the vCenter Server Appliance? (Choose two.)

- A. Create a DNS CNAME record for the vCenter Server (vcsc01.corp.local)
- B. Create a DNS CNAME record for the ESXi Host server (esx01.corp.local)
- C. Create a reverse DNS A record for the vCenter Server (vcsc01).
- D. Create a reverse DNS A record for the ESXi Host server (esx01)
- E. Create a forward DNS A record for the vCenter Server (vcsc01).

Answer: CE

Explanation:

The administrator must create a forward DNS A record for the vCenter Server (vcsc01), which maps the FQDN of the vCenter Server to its IP address. The administrator must also create a reverse DNS A record for the ESXi Host server (esx01), which maps the IP address of the ESXi Host to its FQDN. These DNS records are required for name resolution and certificate validation during the deployment of the vCenter Server Appliance. References:

<https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vcenter.install.doc/GUID-88571D8A-46E1-464>

<https://docs.vmware.com/en/VMware-vSphere/8.0/vsphere-vcenter-upgrade/GUID-752FCA83-1A9B-499E-9C6> If you plan to use an FQDN for the appliance system name, you must verify that the FQDN is resolvable by a DNS server, by adding forward and reverse DNS A records.

NEW QUESTION 31

When configuring vCenter High Availability (HA), which two statements are true regarding the active, passive, and witness nodes? (Choose two.)

- A. Network latency must be less than 10 milliseconds.
- B. They must have a supported Wide Area Network (WAN).
- C. They must have a minimum of a 10 Gbps network adapter
- D. They must have a minimum of a 1 Gbps network adapter.
- E. Network latency must be more than 10 milliseconds.

Answer: AD

Explanation:

When configuring vCenter High Availability (HA), two of the requirements for the active, passive, and witness nodes are that network latency must be less than 10 milliseconds, which ensures reliable communication between them; and they must have a minimum of a 1 Gbps network adapter, which provides sufficient bandwidth for data replication.

References:

<https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.avail.doc/GUID-F01B2F12-C5BB-4C5>

NEW QUESTION 34

An administrator is completing the configuration of a new vSphere cluster and has enabled vSphere High Availability (HA) and vSphere Distributed Resource Scheduler (DRS).

After adding the ESXi hosts to the cluster, which networking information will the administrator be prompted to provide when using the Cluster Quickstart workflow?

- A. vMotion networking

- B. Management networking
- C. vSAN networking
- D. Virtual machine networking

Answer: A

Explanation:

<https://core.vmware.com/resource/cluster-quickstart#section1>

NEW QUESTION 35

What are two use cases for VMware vSphere+? (Choose two.)

- A. Enhance on-premises workloads by managing them through the VMware Cloud Console
- B. Allow live migration between on-premises and VMware Cloud
- C. Increase the performance of the native vCenter vMotion capability
- D. Allow the creation of affinity and anti-affinity rules to be used during failover events
- E. Simplify vCenter lifecycle management through cloud-enabled automation

Answer: AE

Explanation:

<https://www.vmware.com/products/vsphere/vsphere-plus.html> <https://blogs.vmware.com/vsphere/2022/06/vmware-vsphereplus-introducing-the-multi-cloud-workload-platform>

NEW QUESTION 39

After a number of outages within a production VMware software-defined data center, an administrator is tasked with identifying a solution to meet the following requirements:

- Reduce the risk of outages by proactively identifying issues with the environment and resolving them.
- Reduce the complexity of uploading log bundles when raising support tickets.

Which solution should the administrator recommend to meet these requirements?

- A. VMware Aria Operations for Logs
- B. VMware Skyline Advisor Pro
- C. VMware Skyline Health
- D. VMware Aria Operations

Answer: B

Explanation:

Skyline Advisor Pro is a self-service web application that enables you to receive proactive intelligence with new insights, accelerated analysis, and simplified design, within a web browser. To activate Skyline Advisor Pro, upgrade your Skyline Collector to Skyline Collector 3.0 or later versions. The solution that should be recommended to reduce the risk of outages by proactively identifying and resolving issues with the environment and reducing the complexity of uploading log bundles is VMware Skyline Health, which provides automated support and proactive recommendations for vSphere.

NEW QUESTION 40

An administrator wants to use tag-based placement rules on their virtual machine disks using VMware vCenter. Which option would allow the administrator to achieve this?

- A. Storage Policy Based Management
- B. Storage I/O Control
- C. vSphere Storage APIs for Storage Awareness (VASA)
- D. vSphere Distributed Resource Scheduler (DRS)

Answer: A

Explanation:

<https://vnote42.net/2020/01/15/vcenter-tag-based-vm-placement/>

NEW QUESTION 45

Which step is completed during Stage 1 of the vCenter Server Appliance deployment?

- A. Join a vCenter Single Sign-On domain
- B. Create a new vCenter Single Sign-On domain
- C. Select the deployment size
- D. Configure SSH access

Answer: C

Explanation:

The minimum network throughput in Gb/s for vSAN using the Express Storage Architecture (ESA) is 1 Gb/s, which is the minimum requirement for vSAN network adapters. However, VMware recommends using 10 Gb/s or higher for better performance and reliability. References:

<https://docs.vmware.com/en/VMware-vSphere/8.0/com.vmware.vsphere.vsan-planning.doc/GUID-9F1D4A3B>

<https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vcenter.install.doc/GUID-1E39EF05-1DD7-4E> <https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vcenter.install.doc/GUID-1E39EF05-1DD7-4E>

NEW QUESTION 46

An administrator is tasked with configuring certificates for a VMware software-defined data center (SDDC) based on the following requirements:

- All certificates should use certificates trusted by the Enterprise Certificate Authority (CA).
 - The solution should minimize the ongoing management overhead of replacing certificates.
- Which three actions should the administrator take to ensure that the solution meets corporate policy? (Choose three.)

- A. Replace the VMware Certificate Authority (VMCA) certificate with a self-signed certificate generated from the
- B. Replace the machine SSL certificates with custom certificates generated from the Enterprise CA.
- C. Replace the machine SSL certificates with trusted certificates generated from the VMware Certificate Authority (VMCA).
- D. Replace the VMware Certificate Authority (VMCA) certificate with a custom certificate generated from the Enterprise CA.
- E. Replace the solution user certificates with custom certificates generated from the Enterprise CA.
- F. Replace the solution user certificates with trusted certificates generated from the VMware Certificate Authority (VMCA).

Answer: BDE

Explanation:

Option B, D and E are correct because they allow the administrator to replace the machine SSL certificates, the VMware Certificate Authority (VMCA) certificate and the solution user certificates with custom certificates generated from the Enterprise CA, which will ensure that all certificates are trusted by the Enterprise CA and minimize the ongoing management overhead of replacing certificates. Option A is incorrect because replacing the VMCA certificate with a self-signed certificate generated from the VMCA will not ensure that the certificate is trusted by the Enterprise CA. Option C is incorrect because replacing the machine SSL certificates with trusted certificates generated from the VMCA will not ensure that the certificates are trusted by the Enterprise CA. Option F is incorrect because replacing the solution user certificates with trusted certificates generated from the VMCA will not ensure that the certificates are trusted by the Enterprise CA.

References:

<https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.security.doc/GUID-A2A4371A-B888>

NEW QUESTION 49

An administrator runs a two-node vSphere cluster, which contains two domain controller virtual machines (VMs). The administrator wants to ensure that VMs run on separate hosts without interfering with normal maintenance operations.

How should the administrator configure Distributed Resource Scheduler (DRS)?

- A. Create a 'Must run Virtual Machines to Hosts' anti-affinity rule.
- B. Create a 'Virtual Machines to Virtual Machines' anti-affinity rule.
- C. Create a 'Virtual Machines to Virtual Machines' dependency rule.
- D. Create a 'Should run Virtual Machines to Hosts' anti-affinity rule.

Answer: D

Explanation:

<https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.resgmt.doc/GUID-793013E2-0976-4>

NEW QUESTION 53

An administrator is tasked with configuring remote direct memory access (RDMA) over Converged Ethernet v2 (RoCE v2).

Which two types of adapters must the administrator configure? (Choose two.)

- A. Paravirtual RDMA adapter
- B. RDMA network adapter
- C. Software iSCSi adapter
- D. Fibre Channel over Ethernet (FCoE) adapter
- E. Software NVMe over RDMA storage adapter

Answer: BD


Explanation:

ESXi 7 and later supports RoCE v2 technology, which enables RDMA over an Ethernet network. Hosts use an RDMA network adapter installed on the host and a software NVMe over RDMA storage adapter.

<https://docs.vmware.com/en/VMware-vSphere/8.0/vsphere-storage/GUID-F4B42510-9E6D-4446-816A-501286>

NEW QUESTION 55

Exhibit switch

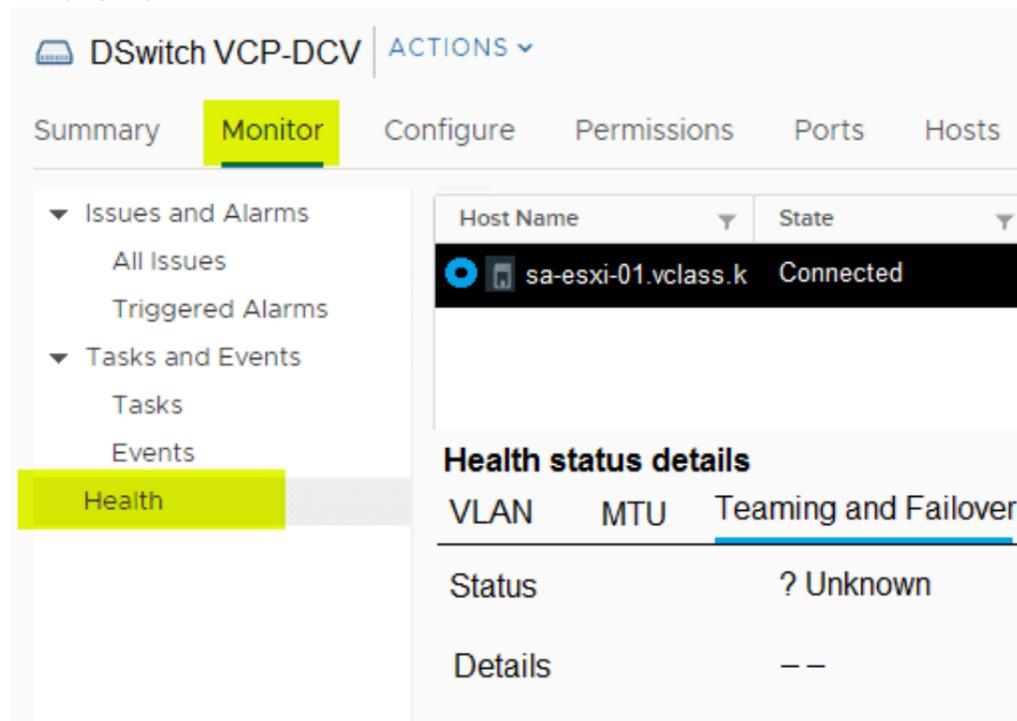

The screenshot shows the vSphere interface for a Distributed Switch (DSwitch) named VCP-DCV. The 'Monitor' tab is selected, displaying a table of connected hosts. One host, 'sa-esxi-01.vclass.k', is shown as 'Connected'. Below the table, the 'Health status details' section is visible, showing 'VLAN', 'MTU', and 'Teaming and Failover' settings. The 'Status' is currently '? Unknown'.

Host Name	State
sa-esxi-01.vclass.k	Connected

Health status details

VLAN	MTU	Teaming and Failover
Status		? Unknown
Details		--

An administrator configures a distributed switch and adds the first VMware ESXi server to it. The administrator also performs the following activities:

- The administrator assigns two uplinks to the distributed switch.
 - The administrator enables uplink teaming.
- When attempting to perform a health check of the teaming policy, the health status of the Teaming and Failover reports as 'Unknown?', as seen in the exhibit.
What can the administrator changes in the distributed switch for the health status to report correctly?

- A. Add a minimum of three hosts with two uplinks each
- B. Add a minimum of two hosts with two uplinks each
- C. Add a minimum of three hosts with four uplinks each
- D. Add a minimum of two hosts with one uplink each

Answer: B

NEW QUESTION 59

An administrator is tasked with installing VMware vCenter. The vCenter Server Appliance must support an environment of:

- 400 hosts
- 4000 virtual machines

Which two resources must be allocated, at a minimum, to meet the requirements? (Choose two.)

- A. 16 vCPUs
- B. 30 GB Memory
- C. 4 vCPUs
- D. 8 vCPUs
- E. 20 GB Memory

Answer: BD

Explanation:

<https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vcenter.install.doc/GUID-88571D8A-46E1-464>

NEW QUESTION 62

An administrator manages VM templates and ISO images for a remote office. Their main requirements are to store these templates in a single repository and manage different versions of the templates.

What solution should the administrator deploy to meet these requirements?

- A. A subscribed content library
- B. A local content library
- C. A vSAN datastore
- D. A shared VMFS datastore

Answer: B

Explanation:

<https://4sysops.com/archives/how-to-create-a-vmware-content-library/#:~:text=A%20VMware%20content%20l>

NEW QUESTION 66

Which three features are only available when using vSphere Distributed Switches instead of vSphere Standard Switches? (Choose three.)

- A. 802.1Q tagging
- B. Port mirroring
- C. Netflow
- D. Configuration backup and restore
- E. IPv6 support
- F. IPv4 support

Answer: BCD

Explanation:

Three features that are only available when using vSphere Distributed Switches instead of vSphere Standard Switches are port mirroring, which allows monitoring network traffic on a virtual switch port; Netflow, which allows collecting IP traffic information from a virtual switch; and configuration backup and restore, which allows saving and restoring distributed switch settings.

References:

<https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.networking.doc/GUID-D5960C77-0D1> <https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.networking.doc/GUID-A59628EA-985> <https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.networking.doc/GUID-E9EB9D18-692>

NEW QUESTION 68

What are two use cases for VMware Tools? (Choose two.)

- A. Time synchronization with an NTP server
- B. Direct deployment of the Aria Automation Config minion
- C. Share folders between ESXi hosts and guest OS file systems
- D. Ability to shut down a virtual machine remotely
- E. Support for unsupported network device drivers

Answer: CD

Explanation:

<https://www.stevenbright.com/2022/03/deploy-salt-minions-automatically-using-vmware-tools/>

Two use cases for VMware Tools are direct deployment of the Aria Automation Config minion and ability to shut down a virtual machine remotely. Direct deployment of the Aria Automation Config minion is a feature that allows the administrator to deploy a configuration management agent to a virtual machine using VMware Tools. This feature enables automation and orchestration of virtual machine configuration tasks. Ability to shut down a virtual machine remotely is a feature that allows the administrator to gracefully power off a virtual machine from the vSphere Client or other VMware products. This feature requires VMware Tools to be installed and running on the guest operating system. References:

<https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.vmwaretools.doc/GUID-28C39A00-74>

NEW QUESTION 71

.....

Thank You for Trying Our Product

We offer two products:

1st - We have Practice Tests Software with Actual Exam Questions

2nd - Questions and Answers in PDF Format

3V0-21.23 Practice Exam Features:

- * 3V0-21.23 Questions and Answers Updated Frequently
- * 3V0-21.23 Practice Questions Verified by Expert Senior Certified Staff
- * 3V0-21.23 Most Realistic Questions that Guarantee you a Pass on Your FirstTry
- * 3V0-21.23 Practice Test Questions in Multiple Choice Formats and Updatesfor 1 Year

100% Actual & Verified — Instant Download, Please Click
[Order The 3V0-21.23 Practice Test Here](#)