

NSE7_OTIS-6.4 Dumps

Fortinet NSE 7 - OT Security 6.4

https://www.certleader.com/NSE7_OTIS-6.4-dumps.html



NEW QUESTION 1

An OT network architect needs to secure control area zones with a single network access policy to provision devices to any number of different networks. On which device can this be accomplished?

- A. FortiGate
- B. FortiEDR
- C. FortiSwitch
- D. FortiNAC

Answer: D

NEW QUESTION 2

An OT administrator has configured FSSO and local firewall authentication. A user who is part of a user group is not prompted for credentials during authentication.

What is a possible reason?

- A. FortiGate determined the user by passive authentication
- B. The user was determined by Security Fabric
- C. Two-factor authentication is not configured with RADIUS authentication method
- D. FortiNAC determined the user by DHCP fingerprint method

Answer: D

NEW QUESTION 3

When you create a user or host profile, which three criteria can you use? (Choose three.)

- A. Host or user group memberships
- B. Administrative group membership
- C. An existing access control policy
- D. Location
- E. Host or user attributes

Answer: ADE

NEW QUESTION 4

In a wireless network integration, how does FortiNAC obtain connecting MAC address information?

- A. RADIUS
- B. Link traps
- C. End station traffic monitoring
- D. MAC notification traps

Answer: A

NEW QUESTION 5

Refer to the exhibit and analyze the output.

```
[PH_DEV_MON_NET_INTF_UTIL] : [eventSeverity] =PHL_INFO, [filename] =phPerfJob.cpp,
[lineNumber] =6646, [intfName]= Intel [R] PRO_100 MT Network
Connection, [intfAlias] =, [hostname] =WIN2K8DC, [hostIpAddr] = 192.168.69.6,
[pollIntv] =56, [recvBytes64] =
44273, [recvBitsPerSec] = 6324.714286, [inIntfUtil] = 0.000632, [sentBytes64] =
82014, [sentBitsPerSec] = 1171
6.285714, [outIntfUtil] = 0.001172, [recvPkts64] = 449, [sentPkts64] = 255,
[inIntfPktErr] = 0, [inIntfPktErrPct] = 0.000000, [outIntfPktErr] =0,
[outIntfPktErrPct] = 0.000000, [inIntfPktDiscarded] =0, [inIntfPktDiscardedPct] =
```

Which statement about the output is true?

- A. This is a sample of a FortiAnalyzer system interface event log.
- B. This is a sample of an SNMP temperature control event log.
- C. This is a sample of a PAM event type.
- D. This is a sample of FortiGate interface statistics.

Answer: A

NEW QUESTION 6

An OT administrator configured and ran a default application risk and control report in FortiAnalyzer to learn more about the key application crossing the network. However, the report output is empty despite the fact that some related real-time and historical logs are visible in the FortiAnalyzer.

What are two possible reasons why the report output was empty? (Choose two.)

- A. The administrator selected the wrong logs to be indexed in FortiAnalyzer.
- B. The administrator selected the wrong time period for the report.
- C. The administrator selected the wrong devices in the Devices section.

D. The administrator selected the wrong hcache table for the report.

Answer: BD

NEW QUESTION 7

Which three Fortinet products can be used for device identification in an OT industrial control system (ICS)? (Choose three.)

- A. FortiNAC
- B. FortiManager
- C. FortiAnalyzer
- D. FortiSIEM
- E. FortiGate

Answer: ACD

NEW QUESTION 8

An OT network administrator is trying to implement active authentication. Which two methods should the administrator use to achieve this? (Choose two.)

- A. Two-factor authentication on FortiAuthenticator
- B. Role-based authentication on FortiNAC
- C. FSSO authentication on FortiGate
- D. Local authentication on FortiGate

Answer: AB

NEW QUESTION 9

An OT network architect must deploy a solution to protect fuel pumps in an industrial remote network. All the fuel pumps must be closely monitored from the corporate network for any temperature fluctuations.

How can the OT network architect achieve this goal?

- A. Configure a fuel server on the remote network, and deploy a FortiSIEM with a single pattern temperature security rule on the corporate network.
- B. Configure a fuel server on the corporate network, and deploy a FortiSIEM with a single pattern temperature performance rule on the remote network.
- C. Configure a fuel server on the remote network, and deploy a FortiSIEM with a single pattern temperature performance rule on the corporate network.
- D. Configure both fuel server and FortiSIEM with a single-pattern temperature performance rule on the corporate network.

Answer: B

NEW QUESTION 10

An OT architect has deployed a Layer 2 switch in the OT network at Level 1 the Purdue model-process control. The purpose of the Layer 2 switch is to segment traffic between PLC1 and PLC2 with two VLANs. All the traffic between PLC1 and PLC2 must first flow through the Layer 2 switch and then through the FortiGate device in the Level 2 supervisory control network.

What statement about the traffic between PLC1 and PLC2 is true?

- A. The Layer 2 switch rewrites VLAN tags before sending traffic to the FortiGate device.
- B. The Layer 2 switches routes any traffic to the FortiGate device through an Ethernet link.
- C. PLC1 and PLC2 traffic must flow through the Layer-2 switch trunk link to the FortiGate device.
- D. In order to communicate, PLC1 must be in the same VLAN as PLC2.

Answer: C

NEW QUESTION 10

Refer to the exhibit.

```
config system interface
  edit VLAN101_dmz
    set forward-domain 101
  next
  edit VLAN101_internal
    set forward-domain 101
end
```


Given the configurations on the FortiGate, which statement is true?

- A. FortiGate is configured with forward-domains to reduce unnecessary traffic.
- B. FortiGate is configured with forward-domains to forward only domain controller traffic.
- C. FortiGate is configured with forward-domains to forward only company domain website traffic.
- D. FortiGate is configured with forward-domains to filter and drop non-domain controller traffic.

Answer: A

NEW QUESTION 12

Refer to the exhibit.

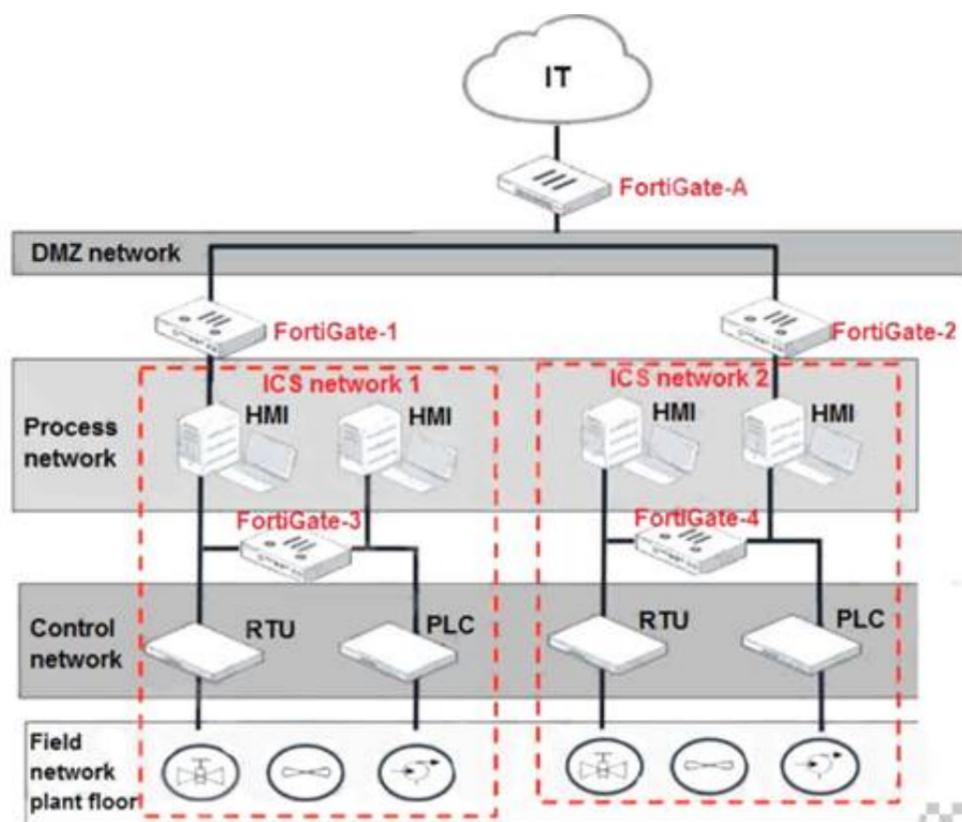

Based on the topology designed by the OT architect, which two statements about implementing OT security are true? (Choose two.)

- A. Firewall policies should be configured on FortiGate-3 and FortiGate-4 with industrial protocol sensors.
- B. Micro-segmentation can be achieved only by replacing FortiGate-3 and FortiGate-4 with a pair of FortiSwitch devices.
- C. IT and OT networks are separated by segmentation.
- D. FortiGate-3 and FortiGate-4 devices must be in a transparent mode.

Answer: CD

NEW QUESTION 13

What are two benefits of a Nozomi integration with FortiNAC? (Choose two.)

- A. Enhanced point of connection details
- B. Direct VLAN assignment
- C. Adapter consolidation for multi-adapter hosts
- D. Importation and classification of hosts

Answer: AB

NEW QUESTION 16

What can be assigned using network access control policies?

- A. Layer 3 polling intervals
- B. FortiNAC device polling methods
- C. Logical networks
- D. Profiling rules

Answer: D

NEW QUESTION 17

Refer to the exhibit.

Maint	Device	Type	Organization	Avail Status	Perf Status	Security Status
●	FG240D3913800441	Fortinet FortiOS	Super	●	●	✖
●	SJ-QA-F-Lnx-CHK	Checkpoint FireWall	Super	●	●	⚠
●	FAPS321C-default	Fortinet FortiAP	Super		●	●

You are navigating through FortiSIEM in an OT network.

How do you view information presented in the exhibit and what does the FortiGate device security status tell you?

- A. In the PCI logging dashboard and there are one or more high-severity security incidents for the FortiGate device.
- B. In the summary dashboard and there are one or more high-severity security incidents for the FortiGate device.
- C. In the widget dashboard and there are one or more high-severity incidents for the FortiGate device.
- D. In the business service dashboard and there are one or more high-severity security incidents for the FortiGate device.

Answer: B

NEW QUESTION 21

.....

Thank You for Trying Our Product

* 100% Pass or Money Back

All our products come with a 90-day Money Back Guarantee.

* One year free update

You can enjoy free update one year. 24x7 online support.

* Trusted by Millions

We currently serve more than 30,000,000 customers.

* Shop Securely

All transactions are protected by VeriSign!

100% Pass Your NSE7_OTIS-6.4 Exam with Our Prep Materials Via below:

https://www.certleader.com/NSE7_OTIS-6.4-dumps.html