

# Juniper

## Exam Questions JN0-105

Junos - Associate (JNCIA-Junos) 2024 Exam



#### NEW QUESTION 1

Which two functions are performed by the PFE? (Choose two.)

- A. It implements firewall filters.
- B. It selects active routes.
- C. It forwards transit traffic.
- D. It maintains the routing table.

**Answer:** AC

#### Explanation:

The Packet Forwarding Engine (PFE) in Junos OS performs several key functions, including implementing firewall filters (A) and forwarding transit traffic (C). The PFE applies firewall filter rules to incoming and outgoing traffic and is responsible for the high-speed forwarding of packets based on the information in the forwarding table.

#### NEW QUESTION 2

What is a benefit of using J-Web?

- A. It simultaneously manages multiple devices.
- B. It provides a customizable dashboard.
- C. It provides more advanced features than the CLI.
- D. It provides console-based management.

**Answer:** B

#### Explanation:

If you've committed a configuration and then need to revert to the previous configuration, the rollback command is used. Since the incorrect IP address has not been committed, as indicated by the commit check command being successful, issuing rollback 1 will undo the changes made in the current session, which includes the accidental entry of the IP address.

#### NEW QUESTION 3

Which Junos OS component is responsible for maintaining the forwarding table?

- A. Routing Engine
- B. chassis control daemon
- C. Packet Forwarding Engine
- D. management daemon

**Answer:** C

#### Explanation:

The Packet Forwarding Engine (PFE) in Junos OS is responsible for maintaining the forwarding table. The PFE processes incoming packets, performs route lookups in the forwarding table, and forwards packets based on this information, offloading these tasks from the Routing Engine to ensure efficient packet forwarding.

#### NEW QUESTION 4

Which two statements are correct regarding Layer 2 network switches? (Choose two.)

- A. Switches create a single collision domain.
- B. Switches are susceptible to traffic loops.
- C. Switches flood broadcast traffic.
- D. Switches do not learn MAC addresses.

**Answer:** BC

#### Explanation:

Layer 2 network switches are crucial components in local area networks (LANs), providing multiple functions for data packet forwarding and network segmentation. One inherent characteristic of switches is their susceptibility to traffic loops, especially in networks with redundant paths. Without proper loop prevention protocols like Spanning Tree Protocol (STP), loops can cause broadcast storms and network instability. Additionally, switches inherently flood broadcast traffic to all ports within the broadcast domain, except the port on which the broadcast was received. This is because broadcast frames are meant to be delivered to all devices within the VLAN, and the switch ensures this by flooding these frames to all ports in the VLAN, except the source port.

#### NEW QUESTION 5

Which two fields are you required to enter when you create a new user account? (Choose two.)

- A. username
- B. full name
- C. user ID
- D. login class

**Answer:** AD

#### Explanation:

In Junos OS, when creating a new user account, the minimum required fields are the username and the login class. The username is the identifier for the account, while the login class specifies the level of access or permissions the user has on the device. Login classes allow for the differentiation between various roles, such

as read-only access or full administrative rights. Other information, such as full name or user ID, is optional and not strictly necessary for the creation of a functional user account.

**NEW QUESTION 6**

Which process in the Junos OS is responsible for device management tasks including the CLI and commit operations?

- A. mgd
- B. chassisd
- C. rpd
- D. dcd

**Answer:** A

**Explanation:**

In Junos OS, the management daemon (mgd) is responsible for handling all the device management tasks, including processing CLI commands and handling commit operations. The mgd daemon interacts with the Junos OS configuration database and provides the necessary logic to ensure that configuration changes are syntactically correct and do not conflict with each other. When a user commits a configuration, mgd validates the changes, applies them to the running configuration, and ensures that the necessary daemons are notified of the changes to apply them accordingly.

**NEW QUESTION 7**

You configured your system authentication order using the set authentication-order tacplus radius password command. Which statement is correct in this scenario?

- A. A rejection by TACACS+ will prevent a login and bypass the other two authentication methods.
- B. The password authentication will only be used if the TACACS+ and RADIUS servers fail to respond.
- C. All authentication methods are used with the most restrictive permission set used.
- D. The password authentication method is evaluated if the TACACS+ and RADIUS servers respond with a reject message.

**Answer:** B

**Explanation:**

In the scenario where the system authentication order is set to "tacplus radius password," the correct statement is (B). If the TACACS+ and RADIUS servers are unreachable or fail to respond, the system will fall back to using password authentication. This ensures that users can still authenticate using locally stored passwords if external authentication servers are unavailable.

**NEW QUESTION 8**

Which process in the Junos OS is responsible for maintaining routing protocols and tables?

- A. mgd
- B. chassisd
- C. rpd
- D. dcd

**Answer:** C

**Explanation:**

The Routing Protocol Daemon (rpd) in Junos OS is responsible for maintaining routing protocols and tables. It handles all routing information, including the calculation of routes and the population of the routing table, making it crucial for dynamic routing operations.

**NEW QUESTION 9**

Which two statements about route preference in Junos are correct? (Choose two.)

- A. Both direct and static routes have the same preference.
- B. Both direct and local routes have the same preference.
- C. Both OSPF internal and OSPF AS external routes have the same preference.
- D. Both EBGP and IBGP routes have the same preference.

**Answer:** BC

**Explanation:**

In Junos OS, route preference (also known as administrative distance) is used to determine the preferred route among multiple routes to the same destination learned via different routing protocols. Direct and local routes, which represent directly connected networks and interfaces, typically share the same low preference value, indicating high trustworthiness because they are directly connected to the router. OSPF internal routes (routes within the same OSPF area) and OSPF AS external routes (routes that are external to the OSPF autonomous system but redistributed into OSPF) also share the same preference value, although this value is higher (indicating less trust) than for direct and local routes. This distinction helps the routing engine decide which routes to use when multiple paths are available.

**NEW QUESTION 10**

What are two link-state routing protocols? (Choose two.)

- A. RIP
- B. BGP
- C. OSPF
- D. IS-IS

**Answer:** CD

#### Explanation:

Link-state routing protocols are a type of routing protocol used in packet-switching networks for finding the best path between source and destination. OSPF (Open Shortest Path First) and IS-IS (Intermediate System to Intermediate System) are both examples of link-state routing protocols. They work by maintaining a complete map or topology of the network, allowing routers to independently calculate the best path to each destination. Unlike distance-vector protocols like RIP, link-state protocols are more efficient and scalable, making them suitable for larger networks.

#### NEW QUESTION 10

Click the Exhibit button.



```
[edit protocols ospf]
user@router# show
area 0.0.0.0 {
    interface all;
}
export [ policy1 policy2 policy3 ];
[edit routing-options]
user@router# show
static {
    route 10.10.10.0/24 next-hop 192.168.1.254;
}
```

Referring to the exhibit, OSPF has three export policies that match different static route prefixes. The 10.10.10.0/24 static route does not match any terms in the policy1 routing policy.

What happens next in this scenario?

- A. The static route is evaluated by the policy3 routing policy.
- B. The static route is evaluated by the policy2 routing policy.
- C. The static route is rejected by the default routing policy.
- D. The static route is rejected by the policy1 routing policy.

**Answer: B**

#### Explanation:

In Junos, when multiple policies are applied to a routing protocol for route export, the routes are evaluated in the order in which the policies are listed. In the exhibit, the OSPF configuration has three export policies listed: policy1, policy2, and policy3. The static route 10.10.10.0/24 does not match any terms in policy1; therefore, it is not rejected by policy1 but is instead passed on to the next policy in the sequence, which is policy2.

If the static route matches a term in policy2 that permits the route, it will be exported into OSPF. If it does not match in policy2, it will then be evaluated by policy3. If there is no match in policy3 as well, and assuming there are no more policies listed, the route would then be subject to the default routing policy behavior, which typically rejects the route unless an explicit accept statement is present in the policies.

#### NEW QUESTION 13

A network administrator is attempting to route traffic on a Juniper switch to one of three different VLANs: Prod, Test, and Dev. Each VLAN has been assigned a numerical value.

In this scenario, what are these numerical values called?

- A. defaults
- B. interfaces
- C. names
- D. tags

**Answer: D**

#### Explanation:

In the context of VLANs (Virtual Local Area Networks) on a Juniper switch, the numerical values assigned to each VLAN, such as those for Prod, Test, and Dev, are known as VLAN tags. These tags are part of the 802.1Q VLAN standard, which allows multiple VLANs to coexist on a single physical network. Each tag uniquely identifies the VLAN to which a frame belongs, enabling the switch to segregate and manage traffic based on VLAN membership. This tagging mechanism allows for efficient traffic separation and management, ensuring that devices within one VLAN do not receive traffic intended for another, thus maintaining network security and efficiency.

#### NEW QUESTION 16

Which prompt indicates that you are using configuration mode?

- A. >
- B. \$
- C. #
- D. %

**Answer: C**

#### Explanation:

In Junos OS, the # prompt indicates that you are in configuration mode. This mode is used for making changes to the configuration of the device.

Reference: Juniper Networks CLI Modes

"The # prompt indicates that you are in configuration mode."

#### NEW QUESTION 20

Which statement is correct concerning exception traffic processing?

- A. Exception traffic is always dropped during congestion.
- B. Exception traffic is rate-limited to protect the RE.
- C. Exception traffic is discarded by the PFE.
- D. Exception traffic is never forwarded.


**Answer: B**

**Explanation:**

Exception traffic refers to packets that the Packet Forwarding Engine (PFE) cannot process normally and must be forwarded to the Routing Engine (RE) for further processing. This includes packets destined for the router itself or packets needing special handling that the PFE cannot provide. To protect the RE from being overwhelmed by such traffic, which could potentially impact the router's control plane functions, exception traffic is rate-limited. This means that there's a threshold to how much exception traffic can be sent to the RE, ensuring that the router's critical management and control functions remain stable and responsive even during high traffic volumes or attacks.

**NEW QUESTION 21**

Exhibit.

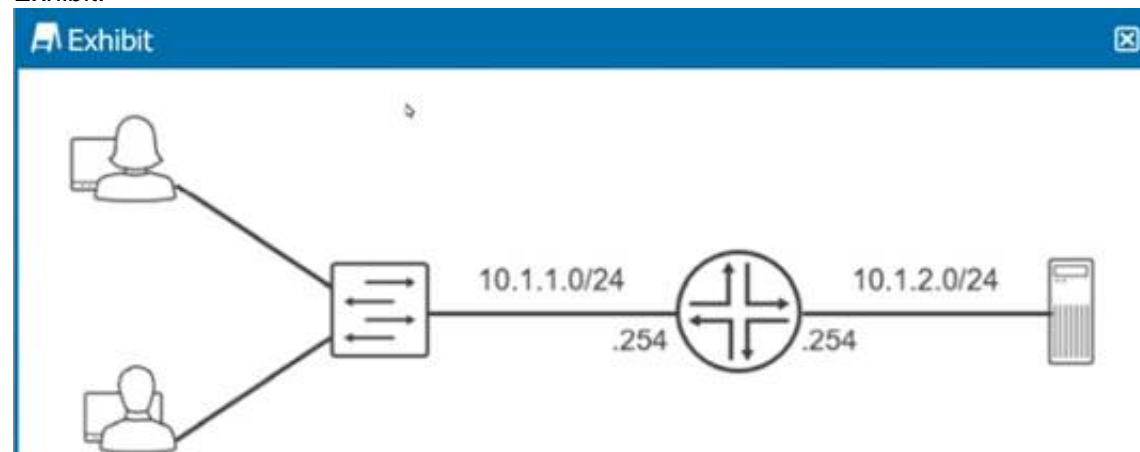

Referring to the exhibit, which routing configuration is required for these two users to access the remote server?

- A. Users must connect directly to the router.
- B. Users and the server require a default gateway.
- C. Trunk ports must be enabled on the switch.
- D. A routing protocol must be enabled on the router.

**Answer: B**

**Explanation:**

For the users in the 10.1.1.0/24 subnet and the server in the 10.1.2.0/24 subnet to communicate with each other, they need to route packets through the router that connects these two subnets. Each user and the server need to have their default gateway set to the IP address of the router interface on their respective subnet (.254). This ensures that packets destined for other subnets are sent to the router, which then routes them to the correct destination subnet.

References:

- ? Juniper official documentation: Configuring Basic Routing.
- ? General networking principles.

**NEW QUESTION 22**

You have completed the initial configuration of your new Junos device. You want to be able to load this configuration at a later time. Which action enables you to perform this task?

- A. Enter the load factory-default command.
- B. Enter the request system reboot command.
- C. Enter the request system zeroize command.
- D. Enter the request system configuration rescue save command.

**Answer: D**

**Explanation:**

In Junos OS, the request system configuration rescue save command is used to save the current active configuration as a rescue configuration. This feature is particularly useful for preserving a known good configuration state that can be quickly reverted to in case of configuration errors or issues. By saving a rescue configuration, administrators can ensure that they have a reliable fallback option that can be loaded in the future to restore the device's operation without having to reconfigure from scratch. This is an essential practice for maintaining network stability and quick recovery.

**NEW QUESTION 24**

Which two external authentication methods does Junos support for administrative access? (Choose two.)

- A. TACACS+
- B. NIS
- C. RADIUS
- D. ACE

**Answer: A**

**Explanation:**

Junos OS supports several external authentication methods for administrative access, with TACACS+ (Terminal Access Controller Access-Control System Plus) and RADIUS (Remote Authentication Dial-In User Service) being among the most commonly used. Both TACACS+ and RADIUS are protocols that allow network devices to communicate with a central authentication server, enabling centralized control over user authentication and authorization. This centralization simplifies the management of user credentials and access policies, especially in larger networks with multiple devices.

**NEW QUESTION 27**

You are asked to convert the number 7 from decimal to binary. Which number is correct in this scenario?

- A. 00001000

- B. 00010000
- C. 00000111
- D. 11100000

**Answer:** C

**Explanation:**

To convert the decimal number 7 to binary, the correct representation is 00000111 (C). In binary, 7 is represented as  $1+2+4$  ( $2^0 + 2^1 + 2^2$ ), which corresponds to the last three digits being 1 in the binary format, with leading zeros added for clarity.

**NEW QUESTION 32**

You issue the monitor traffic interface ge-0/0/0 command. What will this command accomplish?

- A. It displays real-time statistics for interface ge-0/0/0.
- B. It displays an operational summary of ge-0/0/0.
- C. It displays the MTU and MAC address for ge-0/0/0.
- D. It displays a packet capture on interface ge-0/0/0.

**Answer:** D

**Explanation:**

The command "monitor traffic interface ge-0/0/0" (D) initiates a packet capture on the specified interface, allowing you to view the actual packets being transmitted and received. This is useful for troubleshooting and analyzing the traffic passing through the interface in real time.

**NEW QUESTION 33**

Which command displays all IPv6 routes in the default routing instance?

- A. showroute table inet.0
- B. showroute table inet6.1
- C. showroute table inet.1
- D. showroute table inet6.0

**Answer:** D

**Explanation:**

The show route table inet6.0 command displays all IPv6 routes in the default routing instance. In Junos OS, the routing table for IPv6 addresses is referred to as inet6.0, whereas inet.0 is used for IPv4 unicast routes. The other options do not correspond to the correct IPv6 routing table.

References:

? Juniper official documentation: Junos OS Routing Tables Overview.

**NEW QUESTION 34**

You are asked to configure your device running Junos OS to automatically archive your configuration upon commit. In this scenario, which two methods are supported by the Junos OS? (Choose two)

- A. SCP
- B. RCP
- C. FTP
- D. HTTP

**Answer:** AB

**Explanation:**

Junos OS supports multiple methods for automatically archiving configurations upon commit. Two of the supported methods are SCP (Secure Copy Protocol) and RCP (Remote Copy Protocol). These methods can be configured to save the configuration files to a remote server automatically whenever a commit is made.

Reference: Juniper Networks Documentation on Configuration Archival

"You can configure Junos OS to automatically archive the configuration using protocols such as SCP and RCP upon commit."

**NEW QUESTION 39**

What does the user@router> clear log ospf-trace command accomplish?

- A. Logging data into ospf-trace is stopped.
- B. Trace parameters are removed from the OSPF protocol configuration.
- C. Data in the ospf-trace file is removed and logging continues.
- D. The ospf-trace file is deleted.

**Answer:** C

**Explanation:**

The clear log ospf-trace command on a Juniper Networks router is used specifically to manage the contents of the log file named ospf-trace. Executing this command clears or deletes the existing data within the ospf-trace log file but does not stop the logging process. The router continues to log new OSPF-related events and data into this file after the command is executed. This functionality is crucial for troubleshooting and monitoring the OSPF (Open Shortest Path First) protocol's operation by allowing network administrators to remove old or irrelevant log data while continuously capturing new events without interruption.

**NEW QUESTION 40**

Which two addresses are included in an Ethernet frame header? (Choose two.)

- A. source IP address



- B. source MAC address
- C. destination IP address
- D. destination MAC address

**Answer:** BD

**Explanation:**

An Ethernet frame header includes the source MAC address (B) and the destination MAC address (D). These addresses are used to deliver the frame from one Ethernet device to another directly connected Ethernet device on the same network segment. Ethernet frames do not include IP addresses, as those are part of the IP packet encapsulated within the Ethernet frame.

**NEW QUESTION 43**

Which two statements apply to the Routing Engine functions? (Choose two.)

- A. It responds to ping and traceroute commands.
- B. It maintains the routing tables.
- C. It does not process routing updates.
- D. It processes the transit traffic.

**Answer:** AB

**Explanation:**

The Routing Engine (RE) in Juniper Networks devices plays a critical role in the control plane operations. One of its functions includes responding to network utility commands like ping and traceroute, which are essential for diagnosing network connectivity and path issues. Furthermore, the RE is responsible for maintaining the routing tables, which contain information about network paths and destinations. These tables are vital for making forwarding decisions but are distinct from the actual forwarding of packets, which is handled by the Packet Forwarding Engine (PFE).

**NEW QUESTION 46**

You want to find out the chassis serial number of a Junos device. Which command would display this information?

- A. show chassis environment
- B. show chassis hardware
- C. show chassis routing-engine
- D. show chassis location

**Answer:** B

**Explanation:**

The show chassis hardware command in Junos OS displays detailed information about the hardware installed in the device, including the chassis itself. This command provides a list of all hardware components, their serial numbers, part numbers, and version information. When looking for the chassis serial number specifically, this command is the most direct and comprehensive way to retrieve that information, as it includes the serial number of the chassis among the details provided.

**NEW QUESTION 50**

Exhibit

```
user@router> show route 192.168.36.1
```

```
inet.O: 5 destinations, 6 routes (5 active, 0 holddown, 0 hidden) + = Active Route, - = Last Active, * = Both 192.168.36.1/32 *[Static/5] 00:00:31
```

```
> to 10.1.1.2 via ge-0/0/10.0 [OSPF/IO] 00:02:21, metric 1 > to 10.1.1.2 via ge-0/0/10.0
```

Referring to the exhibit, which route(s) will be selected by Junos for packet forwarding?

- A. The OSPF route will be selected.
- B. The static route will be selected.
- C. The Junos OS randomly selects one route.
- D. The Junos OS selects both routes.

**Answer:** B

**Explanation:**

Junos OS selects routes based on the route preference (also known as administrative distance). Static routes typically have a lower route preference than OSPF routes, meaning they are more preferred. Since the static route to 192.168.36.1/32 is shown with a preference of 5, it will be selected over the OSPF route for packet forwarding, assuming no other factors such as route filters or policies affect the routing decision.

**NEW QUESTION 54**

Which criteria does the Junos OS use to select an active route when two entries exist in the routing table?

- A. the route with the lowest preference number
- B. the most recently learned dynamic route
- C. the route with the highest preference number
- D. the route with the highest metric

**Answer:** A

**Explanation:**

In Junos OS, when two entries for the same destination exist in the routing table, the route with the lowest preference number is selected as the active route. This preference number, also known as the route preference or administrative distance, is used to prioritize routes received from different routing protocols.

**NEW QUESTION 59**

You have configured some interfaces on a Junos device; however, you have not yet committed the configuration. What happens if you issue the rollback 0 command in this scenario?

- A. The messages.log file is deleted.
- B. The factory default configuration is loaded.
- C. The Junos device is rebooted.
- D. The interface changes you made are discarded.

**Answer:** D

**Explanation:**

Issuing the rollback 0 command in Junos OS will discard any uncommitted changes and revert to the last committed configuration. This command effectively cancels any configuration changes that have been made but not yet committed, ensuring that the device returns to its previous stable state.

References:

? "rollback 0 .....(rolls back the changes just made )" from Useful Juniper Commands.txt.

? Juniper official documentation: Rolling Back a Configuration.

**NEW QUESTION 64**

Exhibit

```
policy-options {  
  policy-statement Load-Balance-Policy {  
    term Load-Balance {  
      then {  
        load- balance per-flow; accept;  
      }  
    }  
  }  
}
```

```
routing-options {  
  router-id 192.168.100.11; autonomous-system 65201; forwarding-table {  
    export Load-Balance-Policy;  
  }  
}
```

Referring to the exhibit, which two statements are correct? (Choose two.)

- A. The policy enables equal cost load balancing in the forwarding table.
- B. The policy must be applied under the protocols hierarchy.
- C. The policy enables per-packet load balancing.
- D. The policy enables flow-based load balancing.

**Answer:** A

**Explanation:**

The load-balance per-flow statement in the Junos OS policy-options configuration enables flow-based load balancing in the forwarding table. This means that the traffic is distributed across multiple paths based on flows, where a flow is typically identified by attributes such as source and destination IP addresses, and possibly layer 4 information like TCP/UDP ports. This allows for more granular and efficient utilization of available paths, avoiding overloading a single path. The policy does not enable per-packet load balancing, which would send individual packets of the same flow over different paths, potentially causing out-of-order delivery issues. The policy's placement in the forwarding- table export suggests it's intended to influence forwarding behavior, not just routing protocol decisions, and does not necessarily have to be applied under the protocols hierarchy.

**NEW QUESTION 65**

Which two components are included in a transport header? (Choose two.)

- A. destination port number
- B. source MAC address
- C. source port number
- D. destination MAC address

**Answer:** AC

**Explanation:**

The transport layer in the OSI model is responsible for end-to-end communication and error recovery. In a transport header, such as TCP or UDP, the key components include the source port number and the destination port number. These port numbers are used to identify sending and receiving applications. The source port number indicates the port of the sending application, and the destination port number refers to the port of the receiving application. MAC addresses, on the other hand, are part of the data link layer (Layer 2) and would be included in an Ethernet header, not a transport header.

**NEW QUESTION 70**

What are two types of transit traffic that traverse the forwarding plane of a Layer 3 router? (Choose two.)

- A. unicast traffic
- B. multicast traffic
- C. exception traffic
- D. broadcast traffic

**Answer:** AB


**Explanation:**

Transit traffic that traverses the forwarding plane of a Layer 3 router includes both unicast and multicast traffic types. Unicast traffic is directed from a single source to a single destination, while multicast traffic is sent from one source to multiple destinations that are part of a multicast group. These types of traffic are efficiently routed through the network by leveraging the router's forwarding plane capabilities. Exception traffic, which requires special handling by the control plane, and broadcast traffic, which is typically limited to a single broadcast domain and not usually forwarded by Layer 3 routers, are not considered standard types of transit traffic for the forwarding plane of a router.

**NEW QUESTION 75**

Click the Exhibit button.



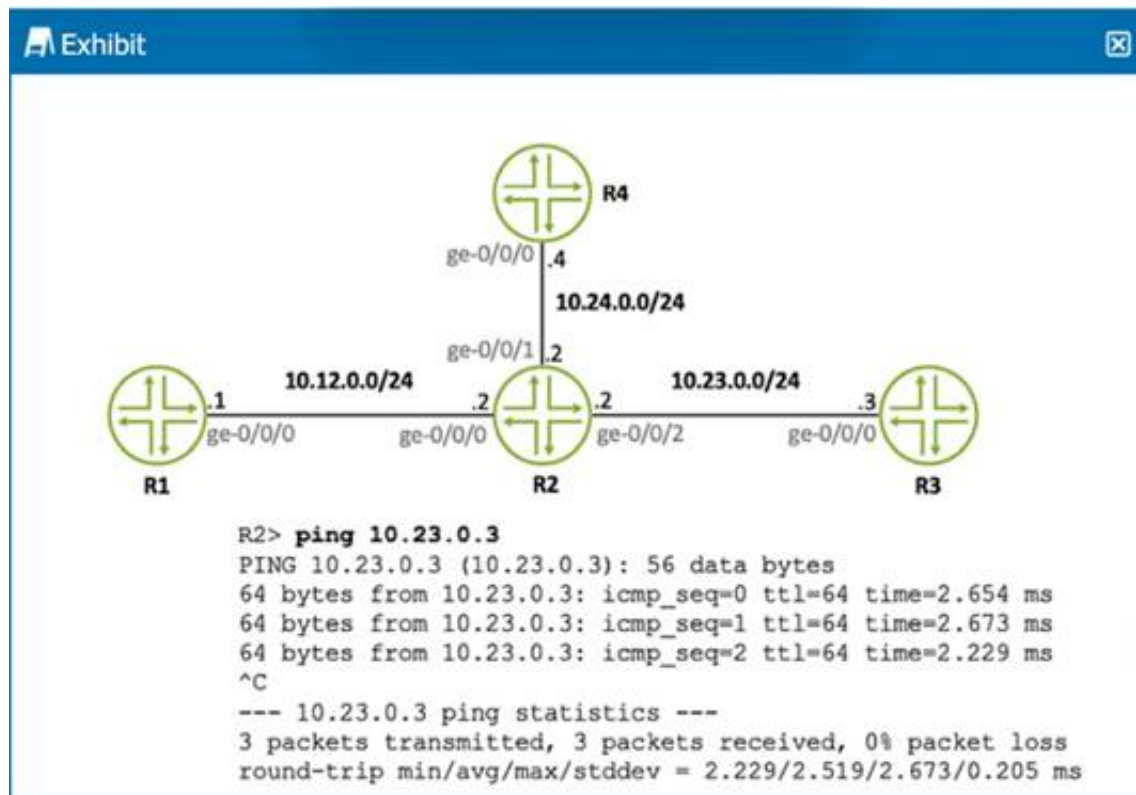

Referring to the exhibit, what is the source IP address of the ping that was executed?

- A. 10.12.0.2
- B. 10.23.0.2
- C. 10.23.0.3
- D. 10.24.0.4

**Answer: B**

**Explanation:**

The exhibit shows a ping test being executed from router R2 to the IP address 10.23.0.3. Since the ping command is issued on R2 and we see successful replies from 10.23.0.3, it means the source of the ping must be an interface on R2. Given the network diagram and the IP address scheme, the source IP address of the ping is on the interface ge-0/0/2 of R2, which is in the subnet 10.23.0.0/24. The only logical IP address for R2's interface in this subnet, based on standard networking practices and the given options, would be 10.23.0.2. The other addresses provided in the options belong to different subnets or are the destination of the ping itself.

**NEW QUESTION 76**

Which two statements are true about the Junos OS? (Choose two.)

- A. Routing tables are stored in the control plane.
- B. Exception traffic is never sent to the control plane.
- C. Exception traffic is sent to the control plane.
- D. Routing tables are stored in the forwarding plane.

**Answer: AC**

**Explanation:**

In Junos OS, as with many network operating systems, the control plane is responsible for processes that determine how to route traffic. This includes maintaining routing tables, which store information about network paths and protocols. Therefore, routing tables are indeed stored in the control plane. Exception traffic refers to packets that cannot be processed by the normal fast-path processing of the Packet Forwarding Engine (PFE) in the forwarding plane, and thus are sent to the control plane for further processing. This might include packets destined for the router itself, packets that need to be fragmented, or packets that match certain firewall filter criteria, among other reasons. Routing tables are not stored in the forwarding plane. However, the forwarding plane contains the forwarding table (sometimes referred to as the forwarding information base or FIB), which is a distilled version of the routing table optimized for fast packet forwarding. The forwarding plane uses this information to perform the actual transfer of packets across the network device interfaces.

**NEW QUESTION 79**

When considering routing tables and forwarding tables, which two statements are correct? (Choose two.)

- A. The routing table is used by the RE to select the best route.
- B. The forwarding table stores all routes and prefixes from all protocols.
- C. The forwarding table is used by the RE to select the best route.
- D. The routing table stores all routes and prefixes from all protocols.

**Answer: AD**

**Explanation:**

The routing table and forwarding table play distinct roles in a Junos OS device. The correct answers are A and D. The routing table (A) is used by the Routing Engine (RE) to select the best route among all the learned routes, while the routing table (D) stores all routes and prefixes learned from all routing protocols. The forwarding table, in contrast, contains only the active routes chosen by the RE and is used by the Packet Forwarding Engine for actual packet forwarding.

**NEW QUESTION 84**

Which protocol would you configure to synchronize the time and date on a Junos device?

- A. SNMP
- B. RIP
- C. NTP

D. NMP

**Answer:** C

**Explanation:**

The Network Time Protocol (NTP) is designed to synchronize the clocks of computers over a network. Configuring NTP on a Junos device ensures that its clock is set accurately, which is crucial for logging, troubleshooting, and maintaining the integrity of time-sensitive operations and security protocols. NTP allows devices to use a hierarchy of time sources, from primary servers synchronized to a reference clock (such as an atomic clock or GPS time) to secondary servers that distribute the time to other devices on the network.

**NEW QUESTION 89**

What information would you find using the CLI help command?

- A. hyperlinks for remediation actions
- B. a URL for accessing the technical documentation
- C. an explanation for specific system log error messages
- D. message of the day

**Answer:** C

**Explanation:**

The CLI help command in Junos OS provides assistance and explanations for commands, command options, and in some cases, specific system log error messages. By using the help command followed by specific keywords or messages, users can get detailed information and context for the commands they are using or errors they are encountering. This feature is particularly useful for understanding the purpose of commands, their syntax, and troubleshooting error messages that may appear in system logs.

**NEW QUESTION 94**

An administrator configures a router's interface with an IPv4 address and subnet mask. The administrator also confirms that this interface is in an up state. In this scenario, which two route types are created on the local router? (Choose two.)

- A. a static route
- B. a local route
- C. a dynamic route
- D. a direct route

**Answer:** BD

**Explanation:**

When an interface on a router is configured with an IPv4 address and is in an up state, two types of routes are automatically created in the routing table: a local route and a direct route, making B and D the correct answers. The local route represents the interface's IP address itself, indicating that the router can directly receive packets addressed to this IP. The direct route represents the subnet or network segment to which the interface is connected, indicating that the router can directly forward packets to destinations within this subnet.

**NEW QUESTION 95**

What are two functions of the Routing Engine? (Choose two.)

- A. It processes all management traffic.
- B. It runs the Junos operating system.
- C. It evaluates firewall filters for transit traffic.
- D. It processes transit traffic.

**Answer:** AB

**Explanation:**

The Routing Engine (RE) in Junos OS has several critical functions, including processing all management traffic (A) and running the Junos operating system (B). The RE handles system management tasks, user interfaces, system services, and routing protocol processes. It does not directly process transit traffic or evaluate firewall filters for transit traffic, as these tasks are handled by the Packet Forwarding Engine (PFE).

**NEW QUESTION 96**

You issue the telnet 10.10.10.1 source 192.168.100.1 command. Which two statements are correct in this scenario? (Choose two.)

- A. The telnet session will have a source address of 10.10.10.1.
- B. The telnet session will have a destination address of 192.168.100.1.
- C. The telnet session will have a destination address of 10.10.10.1.
- D. The telnet session will have a source address of 192.168.100.1.

**Answer:** CD

**Explanation:**

In the given telnet command, "telnet 10.10.10.1 source 192.168.100.1," the destination address of the telnet session is 10.10.10.1, and the source address of the session is specified as 192.168.100.1, making C and D the correct answers. This command instructs the telnet client to use the specified source IP address when establishing the connection to the destination.

**NEW QUESTION 101**

.....

## Thank You for Trying Our Product

### We offer two products:

1st - We have Practice Tests Software with Actual Exam Questions

2nd - Questions and Answers in PDF Format

### JN0-105 Practice Exam Features:

- \* JN0-105 Questions and Answers Updated Frequently
- \* JN0-105 Practice Questions Verified by Expert Senior Certified Staff
- \* JN0-105 Most Realistic Questions that Guarantee you a Pass on Your First Try
- \* JN0-105 Practice Test Questions in Multiple Choice Formats and Updates for 1 Year

**100% Actual & Verified — Instant Download, Please Click**  
**[Order The JN0-105 Practice Test Here](#)**