



Fortinet

Exam Questions NSE4_FGT-7.2

Fortinet NSE 4 - FortiOS 7.2

About ExamBible

Your Partner of IT Exam

Found in 1998

ExamBible is a company specialized on providing high quality IT exam practice study materials, especially Cisco CCNA, CCDA, CCNP, CCIE, Checkpoint CCSE, CompTIA A+, Network+ certification practice exams and so on. We guarantee that the candidates will not only pass any IT exam at the first attempt but also get profound understanding about the certificates they have got. There are so many alike companies in this industry, however, ExamBible has its unique advantages that other companies could not achieve.

Our Advances

* 99.9% Uptime

All examinations will be up to date.

* 24/7 Quality Support

We will provide service round the clock.

* 100% Pass Rate

Our guarantee that you will pass the exam.

* Unique Gurantee

If you do not pass the exam at the first time, we will not only arrange FULL REFUND for you, but also provide you another exam of your claim, ABSOLUTELY FREE!

NEW QUESTION 1

Refer to the exhibit.

```
# diagnose test application ipsmonitor

1: Display IPS engine information
2: Toggle IPS engine enable/disable status
3: Display restart log
4: Clear restart log
5: Toggle bypass status
6: Submit attack characteristics now
10: IPS queue length
11: Clear IPS queue length
12: IPS L7 socket statistics
13: IPS session list
14: IPS NTurbo statistics
15: IPSA statistics
...
97: Start all IPS engines
98: Stop all IPS engines
99: Restart all IPS engines and monitor
```

Examine the intrusion prevention system (IPS) diagnostic command shown in the exhibit.

If option 5 is used with the IPS diagnostic command and the outcome is a decrease in the CPU usage, what is the correct conclusion?

- A. The IPS engine is unable to prevent an intrusion attack.
- B. The IPS engine is inspecting a high volume of traffic.
- C. The IPS engine will continue to run in a normal state.
- D. The IPS engine is blocking all traffic.

Answer: B

NEW QUESTION 2

Refer to the exhibits.

Exhibit A shows a network diagram. Exhibit B shows the firewall policy configuration and a VIP object configuration.

The WAN (port1) interface has the IP address 10.200.1.1/24.

The LAN (port3) interface has the IP address 10.0.1.254/24.

Exhibit A Exhibit B

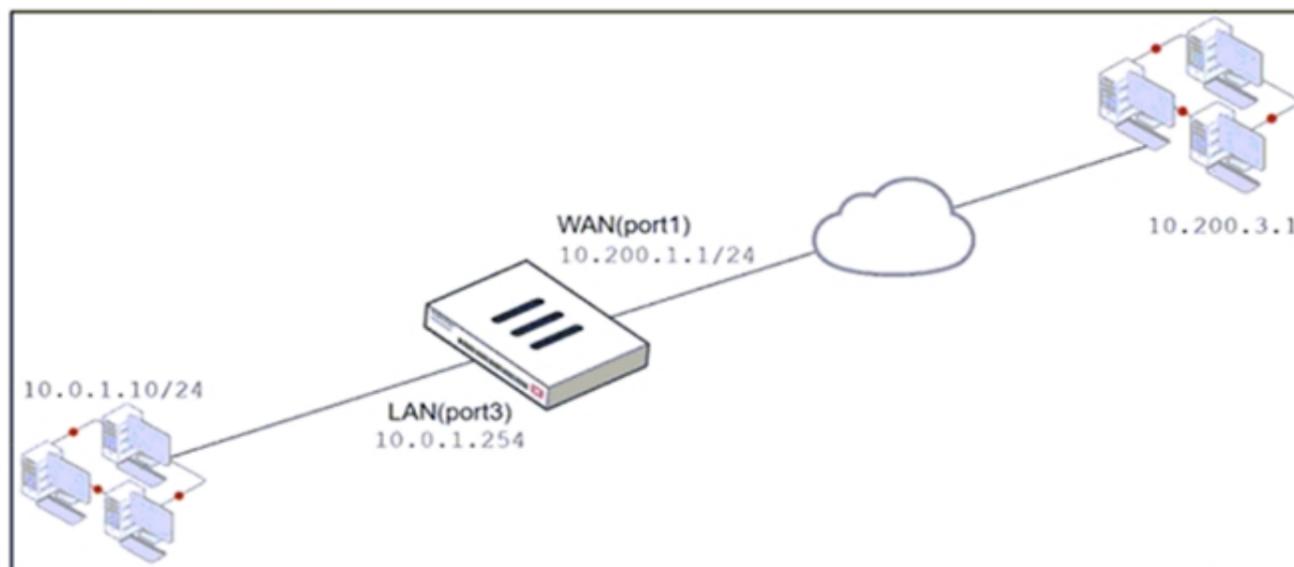


Exhibit A Exhibit B

Name	From	To	Source	Destination	Schedule	Service	Action	NAT
WebServer	WAN (port1)	LAN (port3)	all	VIP	always	ALL	ACCEPT	Enabled

Edit Virtual IP

VIP type: IPv4
 Name: VIP
 Comments: Write a comment... 0/255
 Color: Change

Network

Interface: WAN (port1)

Type: Static NAT

External IP address/range: 10.200.1.10

Map to

 IPv4 address/range: 10.0.1.10

Optional Filters

Port Forwarding

Protocol: TCP UDP SCTP ICMP

Port Mapping Type: One to one Many to many

External service port: 10443

Map to IPv4 port: 443

If the host 10.200.3.1 sends a TCP SYN packet on port 10443 to 10.200.1.10, what will the source address, destination address, and destination port of the packet be, after FortiGate forwards the packet to the destination?

- A. 10.0.1.254, 10.0.1.10, and 443, respectively
- B. 10.0.1.254, 10.0.1.10, and 10443, respectively
- C. 10.200.3.1, 10.0.1.10, and 443, respectively

Answer: C

NEW QUESTION 3

Which three methods are used by the collector agent for AD polling? (Choose three.)

- A. FortiGate polling
- B. NetAPI
- C. Novell API
- D. WMI
- E. WinSecLog

Answer: BDE

NEW QUESTION 4

A network administrator enabled antivirus and selected an SSL inspection profile on a firewall policy. When downloading an EICAR test file through HTTP, FortiGate detects the virus and blocks the file. When downloading the same file through HTTPS, FortiGate does not detect the virus and does not block the file, allowing it to be downloaded.

The administrator confirms that the traffic matches the configured firewall policy. What are two reasons for the failed virus detection by FortiGate? (Choose two.)

- A. The website is exempted from SSL inspection.
- B. The EICAR test file exceeds the protocol options oversize limit.
- C. The selected SSL inspection profile has certificate inspection enabled.
- D. The browser does not trust the FortiGate self-signed CA certificate.

Answer: AD

NEW QUESTION 5

Which three statements explain a flow-based antivirus profile? (Choose three.)

- A. Flow-based inspection uses a hybrid of the scanning modes available in proxy-based inspection.
- B. If a virus is detected, the last packet is delivered to the client.
- C. The IPS engine handles the process as a standalone.
- D. FortiGate buffers the whole file but transmits to the client at the same time.
- E. Flow-based inspection optimizes performance compared to proxy-based inspection.

Answer: ADE

NEW QUESTION 6

A network administrator wants to set up redundant IPsec VPN tunnels on FortiGate by using two IPsec VPN tunnels and static routes. All traffic must be routed through the primary tunnel when both tunnels are up. The secondary tunnel must be used only if the primary tunnel goes down. In addition, FortiGate should be able to detect a dead tunnel to speed up tunnel failover. Which two key configuration changes must the administrator make on FortiGate to meet the requirements? (Choose two.)

- A. Configure a higher distance on the static route for the primary tunnel, and a lower distance on the static route for the secondary tunnel.
- B. Configure a lower distance on the static route for the primary tunnel, and a higher distance on the static route for the secondary tunnel.
- C. Enable Auto-negotiate and Autokey Keep Alive on the phase 2 configuration of both tunnels.
- D. Enable Dead Peer Detection.


Answer: AD

NEW QUESTION 7

Refer to the exhibit.

The exhibit shows a diagram of a FortiGate device connected to the network, the firewall policy and VIP configuration on the FortiGate device, and the routing table on the ISP router.

When the administrator tries to access the web server public address (203.0.113.2) from the internet, the connection times out. At the same time, the administrator runs a sniffer on FortiGate to capture incoming web traffic to the server and does not see any output.

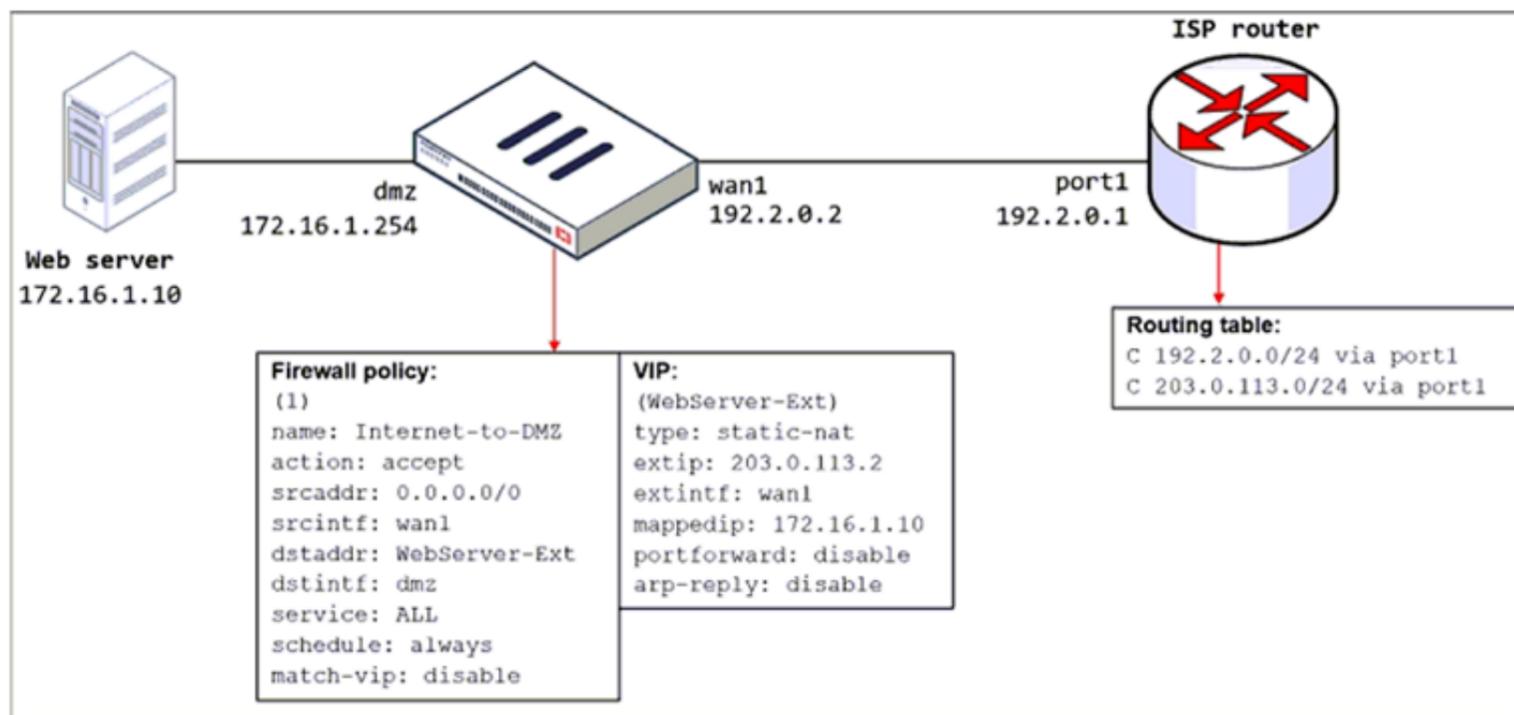

Based on the information shown in the exhibit, what configuration change must the administrator make to fix the connectivity issue?

- A. Configure a loopback interface with address 203.0.113.2/32.
- B. In the VIP configuration, enable arp-reply.
- C. Enable port forwarding on the server to map the external service port to the internal service port.
- D. In the firewall policy configuration, enable match-vip.

Answer: D

NEW QUESTION 8

Which statement correctly describes the use of reliable logging on FortiGate?

- A. Reliable logging is enabled by default in all configuration scenarios.
- B. Reliable logging is required to encrypt the transmission of logs.
- C. Reliable logging can be configured only using the CLI.
- D. Reliable logging prevents the loss of logs when the local disk is full.

Answer: D

NEW QUESTION 9

Which two settings are required for SSL VPN to function between two FortiGate devices? (Choose two.)

- A. The client FortiGate requires a manually added route to remote subnets.
- B. The client FortiGate requires a client certificate signed by the CA on the server FortiGate.
- C. The server FortiGate requires a CA certificate to verify the client FortiGate certificate.
- D. The client FortiGate requires the SSL VPN tunnel interface type to connect SSL VPN.

Answer: BC

NEW QUESTION 10

Refer to the exhibits.

The exhibits show the SSL and authentication policy (Exhibit A) and the security policy (Exhibit B) for Facebook.

Users are given access to the Facebook web application. They can play video content hosted on Facebook, but they are unable to leave reactions on videos or other types of posts.

Exhibit A Exhibit B

Edit Policy

Name ⓘ Facebook SSL Inspection

Incoming Interface port2

Outgoing Interface port1

Source all

Destination all

Service ALL

Firewall / Network Options

Central NAT is enabled so NAT settings from matching [Central SNAT policies](#) will be applied.

Security Profiles

SSL Inspection SSL certificate-inspection

Exhibit A Exhibit B

Edit Policy

Name ⓘ Facebook Access

Policy Mode ⓘ **Standard** Learn Mode

Incoming Interface port2

Outgoing Interface port1

Source all

Destination all

Schedule always

Service **App Default** Specify

Application

- Facebook
- Facebook_Like.Button
- Facebook_Video.Play

URL Category

Action **ACCEPT** DENY

Firewall/Network Options

Protocol Options **PROT** default

Which part of the policy configuration must you change to resolve the issue?

- A. Force access to Facebook using the HTTP service.
- B. Make the SSL inspection a deep content inspection.
- C. Add Facebook in the URL category in the security policy.
- D. Get the additional application signatures required to add to the security policy.

Answer: B

NEW QUESTION 10

Refer to the exhibit.

```
session info: proto=6 proto_state=02 duration=6 expire=6 timeout=3600 flags=0000
0000 socktype=0 sockport=0 av_idx=0 use=3
origin-shaper=
reply-shaper=
per_ip_shaper=
class_id=0 ha_id=0 policy_dir=0 tunnel=/ vlan_cos=0/255
state=may_dirty
statistic(bytes/packets/allow_err): org=180/3/1 reply=264/3/1 tuples=2
tx speed(Bps/kbps): 26/0 rx speed(Bps/kbps): 39/0
origin->sink: org pre->post, reply pre->post dev=3->5/5->3 gwy=10.0.1.11/0.0.0.0
hook=pre dir=org act=dnat 10.200.3.1:38024->10.200.1.11:80(10.0.1.11:80)
hook=post dir=reply act=snat 10.0.1.11:80->10.200.3.1:38024(10.200.1.11:80)
pos/(before,after) 0/(0,0), 0/(0,0)
misc=0 policy_id=8 auth_info=0 chk_client_info=0 vd=0
serial=0001fb06 tos=ff/ff app_list=0 app=0 url_cat=0
rpd_b_link_id= 00000000 rpd_b_svc_id=0 ngfwid=n/a
npu_state=0x040000
```

Which contains a session diagnostic output. Which statement is true about the session diagnostic output?

- A. The session is in SYN_SENT state.
- B. The session is in FIN_ACK state.
- C. The session is in FTN_WAIT state.
- D. The session is in ESTABLISHED state.

Answer: A

Explanation:

Indicates TCP (proto=6) session in SYN_SENT state (proto=state=2) <https://kb.fortinet.com/kb/viewContent.do?externalId=FD30042>

NEW QUESTION 14

Which two configuration settings are synchronized when FortiGate devices are in an active-active HA cluster? (Choose two.)

- A. FortiGuard web filter cache
- B. FortiGate hostname
- C. NTP
- D. DNS

Answer: CD

NEW QUESTION 18

Which of the following statements is true regarding SSL VPN settings for an SSL VPN portal?

- A. By default, FortiGate uses WINS servers to resolve names.
- B. By default, the SSL VPN portal requires the installation of a client's certificate.
- C. By default, split tunneling is enabled.
- D. By default, the admin GUI and SSL VPN portal use the same HTTPS port.

Answer: D

NEW QUESTION 20

Which statement correctly describes NetAPI polling mode for the FSSO collector agent?

- A. The collector agent uses a Windows API to query DCs for user logins.
- B. NetAPI polling can increase bandwidth usage in large networks.
- C. The collector agent must search security event logs.
- D. The NetSession Enum function is used to track user logouts.

Answer: D

Explanation:

FortiGate_Infrastructure_7.0 page 270: "NetAPI: polls temporary sessions created on the DC when a user logs in or logs out and calls the NetSessionEnum function in Windows."

NEW QUESTION 21

Refer to the web filter raw logs.

```
date=2020-07-09 time=12:51:51 logid="0316013057" type="utm"
subtype="webfilter" eventtype="ftgd_blk" level="warning"
vd="root" eventtime=1594313511250173744 tz="-0400" policyid=1
sessionid=5526 srcip=10.0.1.10 srcport=48660 srcintf="port2"
srcintfrole="undefined" dstip=104.244.42.193 dstport=443
dstintf="port1" dstintfrole="undefined" proto=6 service="HTTPS"
hostname="twitter.com" profile="all_users_web" action="blocked"
reqtype="direct" url="https://twitter.com/" sentbyte=517
rcvbyte=0 direction="outgoing" msg="URL belongs to a category
with warnings enabled" method="domain" cat=37 catdesc="Social
Networking"

date=2020-07-09 time=12:52:16 logid="0316013057" type="utm"
subtype="webfilter" eventtype="ftgd_blk" level="warning"
vd="root" eventtime=1594313537024536428 tz="-0400" policyid=1
sessionid=5552 srcip=10.0.1.10 srcport=48698 srcintf="port2"
srcintfrole="undefined" dstip=104.244.42.193 dstport=443
dstintf="port1" dstintfrole="undefined" proto=6 service="HTTPS"
hostname="twitter.com" profile="all_users_web"
action="passthrough" reqtype="direct" url="https://twitter.com/"
sentbyte=369 rcvbyte=0 direction="outgoing" msg="URL belongs to
a category with warnings enabled" method="domain" cat=37
catdesc="Social Networking"
```

Based on the raw logs shown in the exhibit, which statement is correct?

- A. Social networking web filter category is configured with the action set to authenticate.
- B. The action on firewall policy ID 1 is set to warning.
- C. Access to the social networking web filter category was explicitly blocked to all users.
- D. The name of the firewall policy is all_users_web.

Answer: A

NEW QUESTION 22

Examine this PAC file configuration.

Which of the following statements are true? (Choose two.)

- A. Browsers can be configured to retrieve this PAC file from the FortiGate.
- B. Any web request to the 172.25. 120.0/24 subnet is allowed to bypass the proxy.
- C. All requests not made to Fortinet.com or the 172.25. 120.0/24 subnet, have to go through altproxy.corp.com: 8060.
- D. Any web request fortinet.com is allowed to bypass the proxy.

Answer: AD

NEW QUESTION 24

Which of the following statements about central NAT are true? (Choose two.)

- A. IP tool references must be removed from existing firewall policies before enabling central NAT .
- B. Central NAT can be enabled or disabled from the CLI only.
- C. Source NAT, using central NAT, requires at least one central SNAT policy.
- D. Destination NAT, using central NAT, requires a VIP object as the destination address in a firewall.

Answer: AB

NEW QUESTION 27

What is the limitation of using a URL list and application control on the same firewall policy, in NGFW policy-based mode?

- A. It limits the scanning of application traffic to the DNS protocol only.
- B. It limits the scanning of application traffic to use parent signatures only.
- C. It limits the scanning of application traffic to the browser-based technology category only.
- D. It limits the scanning of application traffic to the application category only.

Answer: C

Explanation:

<https://docs.fortinet.com/document/fortigate/5.6.0/cookbook/38324/ngfw-policy-based-mode>

NEW QUESTION 30

Which two statements explain antivirus scanning modes? (Choose two.)

- A. In proxy-based inspection mode, files bigger than the buffer size are scanned.
- B. In flow-based inspection mode, FortiGate buffers the file, but also simultaneously transmits it to the client.
- C. In proxy-based inspection mode, antivirus scanning buffers the whole file for scanning, before sending it to the client.
- D. In flow-based inspection mode, files bigger than the buffer size are scanned.


Answer: BC

Explanation:

An antivirus profile in full scan mode buffers up to your specified file size limit. The default is 10 MB. That is large enough for most files, except video files. If your FortiGate model has more RAM, you may be able to increase this threshold. Without a limit, very large files could exhaust the scan memory. So, this threshold balances risk and performance. Is this tradeoff unique to FortiGate, or to a specific model? No. Regardless of vendor or model, you must make a choice. This is because of the difference between scans in theory, that have no limits, and scans on real-world devices, that have finite RAM. In order to detect 100% of malware regardless of file size, a firewall would need infinitely large RAM--something that no device has in the real world. Most viruses are very small. This table shows a typical tradeoff. You can see that with the default 10 MB threshold, only 0.01% of viruses pass through.

NEW QUESTION 33

Refer to the exhibits to view the firewall policy (Exhibit A) and the antivirus profile (Exhibit B).

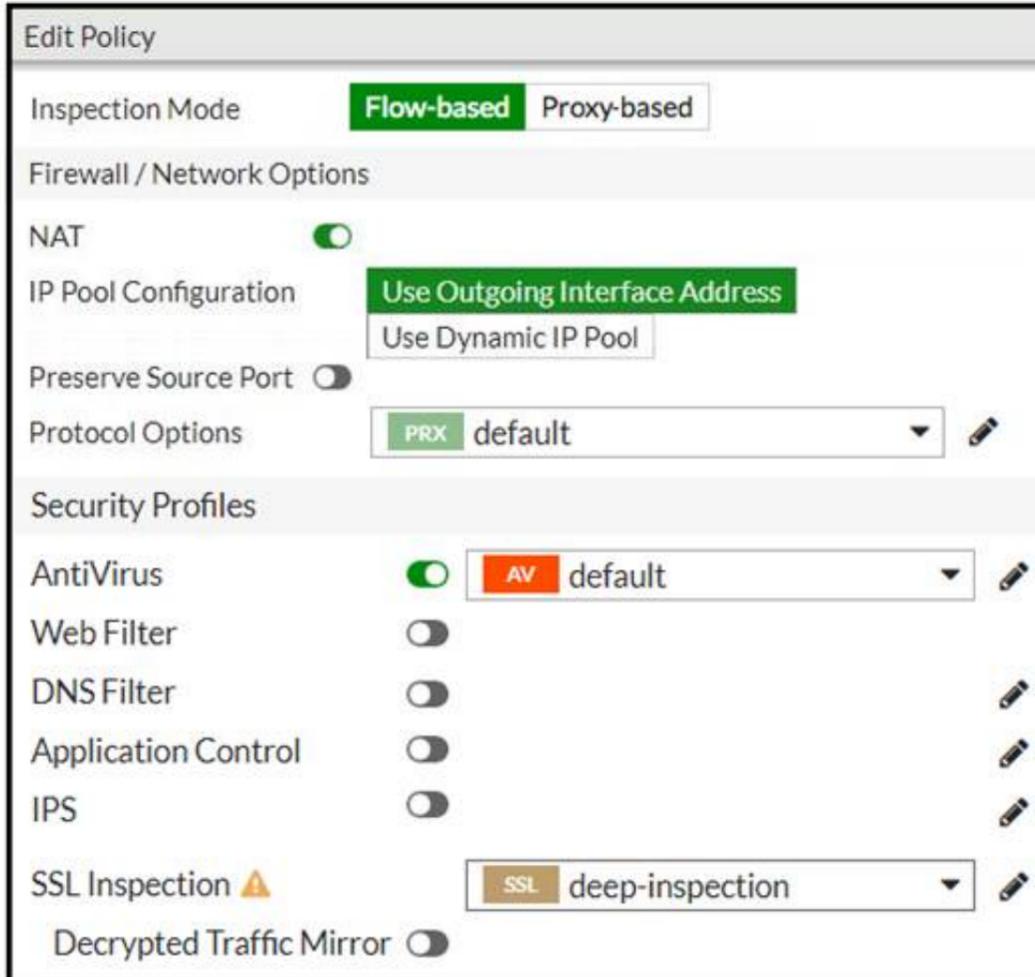

Edit AntiVirus Profile

Name:

Comments: 29/255

Detect Viruses: Block Monitor

Feature set: Flow-based Proxy-based

Inspected Protocols

HTTP

SMTP

POP3

IMAP

FTP

CIFS

APT Protection Options

Treat Windows Executables in Email Attachments as Viruses

Include Mobile Malware Protection

Virus Outbreak Prevention i

Use FortiGuard Outbreak Prevention Database

Use External Malware Block List i ⚠

Which statement is correct if a user is unable to receive a block replacement message when downloading an infected file for the first time?

- A. The firewall policy performs the full content inspection on the file.
- B. The flow-based inspection is used, which resets the last packet to the user.
- C. The volume of traffic being inspected is too high for this model of FortiGate.
- D. The intrusion prevention security profile needs to be enabled when using flow-based inspection mode.

Answer: B

Explanation:

- "ONLY" If the virus is detected at the "START" of the connection, the IPS engine sends the block replacement message immediately
- When a virus is detected on a TCP session (FIRST TIME), but where "SOME PACKETS" have been already forwarded to the receiver, FortiGate "resets the connection" and does not send the last piece of the file. Although the receiver got most of the file content, the file has been truncated and therefore, can't be opened. The IPS engine also caches the URL of the infected file, so that if a "SECOND ATTEMPT" to transmit the file is made, the IPS engine will then send a block replacement message to the client instead of scanning the file again.

In flow mode, the FortiGate drops the last packet killing the file. But because of that the block replacement message cannot be displayed. If the file is attempted to download again the block message will be shown.

NEW QUESTION 38

Refer to the exhibits.

The exhibits show a network diagram and firewall configurations.

An administrator created a Deny policy with default settings to deny Webserver access for Remote-User2. Remote-User1 must be able to access the Webserver. Remote-User2 must not be able to access the Webserver.

Exhibit A Exhibit B

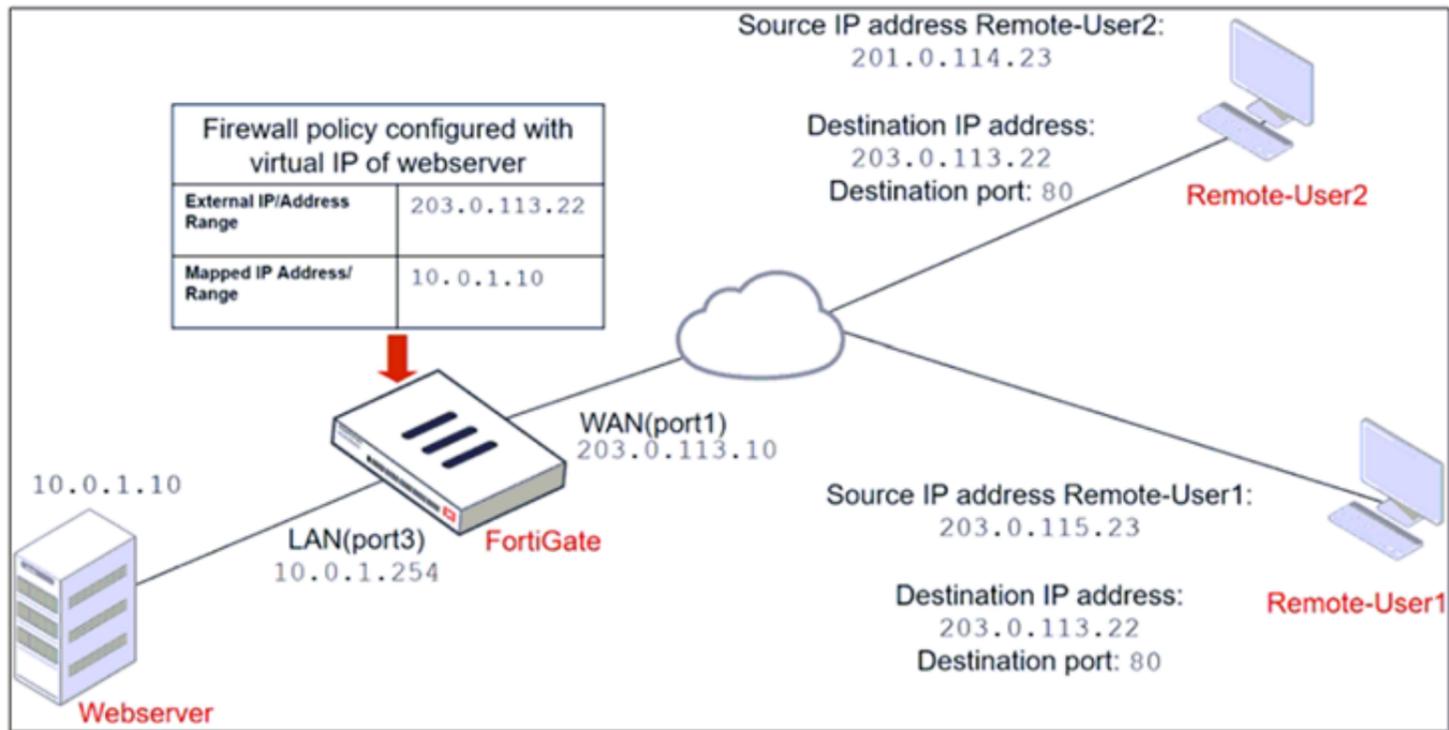


Exhibit A Exhibit B

Edit Address

Name	Deny_IP
Color	Change
Type	Subnet
IP/Netmask	201.0.114.23/32
Interface	WAN (port1)
Static route configuration	<input type="checkbox"/>
Comments	Deny web server access. 23/255

Firewall address object

Firewall policies

ID	Name	Source	Destination	Schedule	Service	Action
WAN (port1) → LAN (port3) 2						
4	Deny	Deny_IP	all	always	ALL	DENY
3	Allow_access	all	Webserver	always	ALL	ACCEPT

In this scenario, which two changes can the administrator make to deny Webserver access for Remote-User2? (Choose two.)

- A. Disable match-vip in the Deny policy.
- B. Set the Destination address as Deny_IP in the Allow-access policy.
- C. Enable match vip in the Deny policy.
- D. Set the Destination address as Web_server in the Deny policy.

Answer: CD

Explanation:

<https://community.fortinet.com/t5/FortiGate/Technical-Tip-Firewall-does-not-block-incoming-WAN-to-LAN/ta>

NEW QUESTION 39

Refer to the exhibit.

```
# diagnose test application ipsmonitor
1: Display IPS engine information
2: Toggle IPS engine enable/disable status
3: Display restart log
4: Clear restart log
5: Toggle bypass status
98: Stop all IPS engines
99: Restart all IPS engines and monitor
```

Examine the intrusion prevention system (IPS) diagnostic command.

Which statement is correct If option 5 was used with the IPS diagnostic command and the outcome was a decrease in the CPU usage?

- A. The IPS engine was inspecting high volume of traffic.
- B. The IPS engine was unable to prevent an intrusion attack .
- C. The IPS engine was blocking all traffic.
- D. The IPS engine will continue to run in a normal state.

Answer: A

NEW QUESTION 41

You have enabled logging on your FortiGate device for Event logs and all Security logs, and you have set up logging to use the FortiGate local disk . What is the default behavior when the local disk is full?

- A. Logs are overwritten and the only warning is issued when log disk usage reaches the threshold of 95%.
- B. No new log is recorded until you manually clear logs from the local disk .
- C. Logs are overwritten and the first warning is issued when log disk usage reaches the threshold of 75%.
- D. No new log is recorded after the warning is issued when log disk usage reaches the threshold of 95%.

Answer: C

NEW QUESTION 43

An administrator has configured two-factor authentication to strengthen SSL VPN access. Which additional best practice can an administrator implement?

- A. Configure Source IP Pools.
- B. Configure split tunneling in tunnel mode.
- C. Configure different SSL VPN realms.
- D. Configure host check .

Answer: D

NEW QUESTION 44

What is the limitation of using a URL list and application control on the same firewall policy, in NGFW policy-based mode?

- A. It limits the scope of application control to the browser-based technology category only.
- B. It limits the scope of application control to scan application traffic based on application category only.
- C. It limits the scope of application control to scan application traffic using parent signatures only
- D. It limits the scope of application control to scan application traffic on DNS protocol only.

Answer: B

NEW QUESTION 49

Refer to the exhibits.
 Exhibit A.

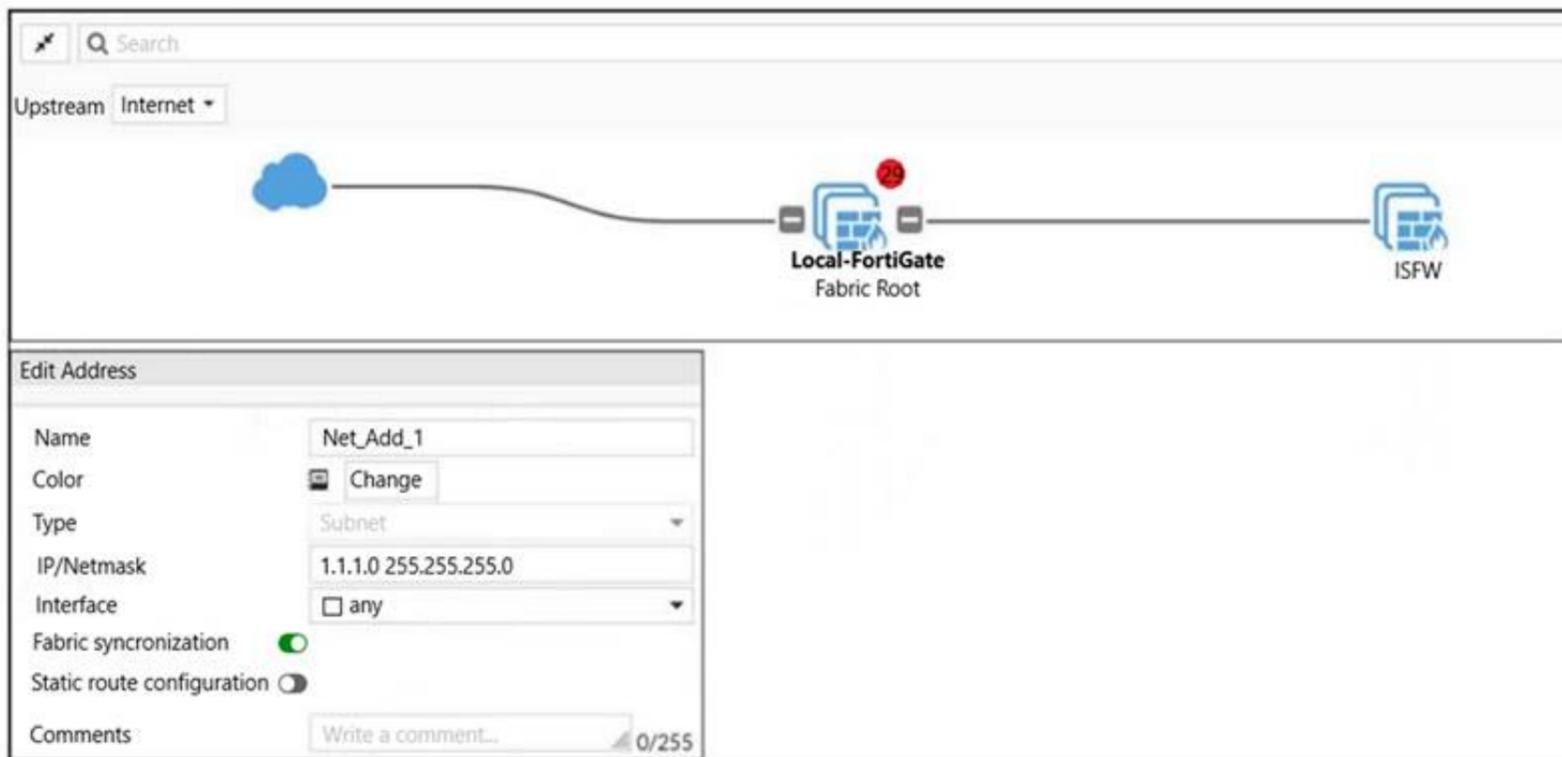


Exhibit B.

```
Local-FortiGate # show full-configuration system csf
config system csf
  set status enable
  set upstream-ip 0.0.0.0
  set upstream-port 8013
  set group-name "fortinet"
  set group-password ENC X18CtzrcUBUq9yz9nryP+YfM16
  BJkv7S/trtoh2gYAe5CH8YMAa0GT18aX+/dKH/o5izw1ZEoN1QN2N
  FGLT4r5z2AyYI8i1PxutiLcsCp1AdZadv1CxDe66IdLX7I6o22J9P
  set accept-auth-by-cert enable
  set log-unification enable
  set authorization-request-type serial
  set fabric-workers 2
  set downstream-access disable
  set configuration-sync default
  set fabric-object-unification local
  set saml-configuration-sync default
```

```
ISFW # show full-configuration system csf
config system csf
  set status enable
  set upstream-ip 10.0.1.254
  set upstream-port 8013
  set group-name ''
  set accept-auth-by-cert enable
  set log-unification enable
  set authorization-request-type serial
  set fabric-workers 2
  set downstream-access disable
  set configuration-sync default
  set saml-configuration-sync default
end

ISFW #
ISFW #
```

An administrator creates a new address object on the root FortiGate (Local-FortiGate) in the security fabric. After synchronization, this object is not available on the downstream FortiGate (ISFW).

What must the administrator do to synchronize the address object?

- A. Change the csf setting on Local-FortiGate (root) to set configuration-sync local.
- B. Change the csf setting on ISFW (downstream) to set configuration-sync local.
- C. Change the csf setting on Local-FortiGate (root) to set fabric-object-unification default.
- D. Change the csf setting on ISFW (downstream) to set fabric-object-unification default.

Answer: C

NEW QUESTION 51

Refer to exhibit.

An administrator configured the web filtering profile shown in the exhibit to block access to all social networking sites except Twitter. However, when users try to access twitter.com, they are redirected to a FortiGuard web filtering block page.

URL	Type	Action	Status
twitter.com	Wildcard	Allow	Enable

Based on the exhibit, which configuration change can the administrator make to allow Twitter while blocking all other social networking sites?

- A. On the FortiGuard Category Based Filter configuration, set Action to Warning for Social Networking
- B. On the Static URL Filter configuration, set Type to Simple
- C. On the Static URL Filter configuration, set Action to Exempt.
- D. On the Static URL Filter configuration, set Action to Monitor.

Answer: C

NEW QUESTION 52

If the Issuer and Subject values are the same in a digital certificate, which type of entity was the certificate issued to?

- A. A CRL
- B. A person
- C. A subordinate CA
- D. A root CA

Answer: D

NEW QUESTION 57


Which CLI command will display sessions both from client to the proxy and from the proxy to the servers?

- A. diagnose wad session list
- B. diagnose wad session list | grep hook-pre&&hook-out
- C. diagnose wad session list | grep hook=pre&&hook=out
- D. diagnose wad session list | grep "hook=pre"&"hook=out"

Answer: A

NEW QUESTION 60

A network administrator is troubleshooting an IPsec tunnel between two FortiGate devices. The administrator has determined that phase 1 fails to come up. The administrator has also re-entered the pre-shared key on both FortiGate devices to make sure they match.

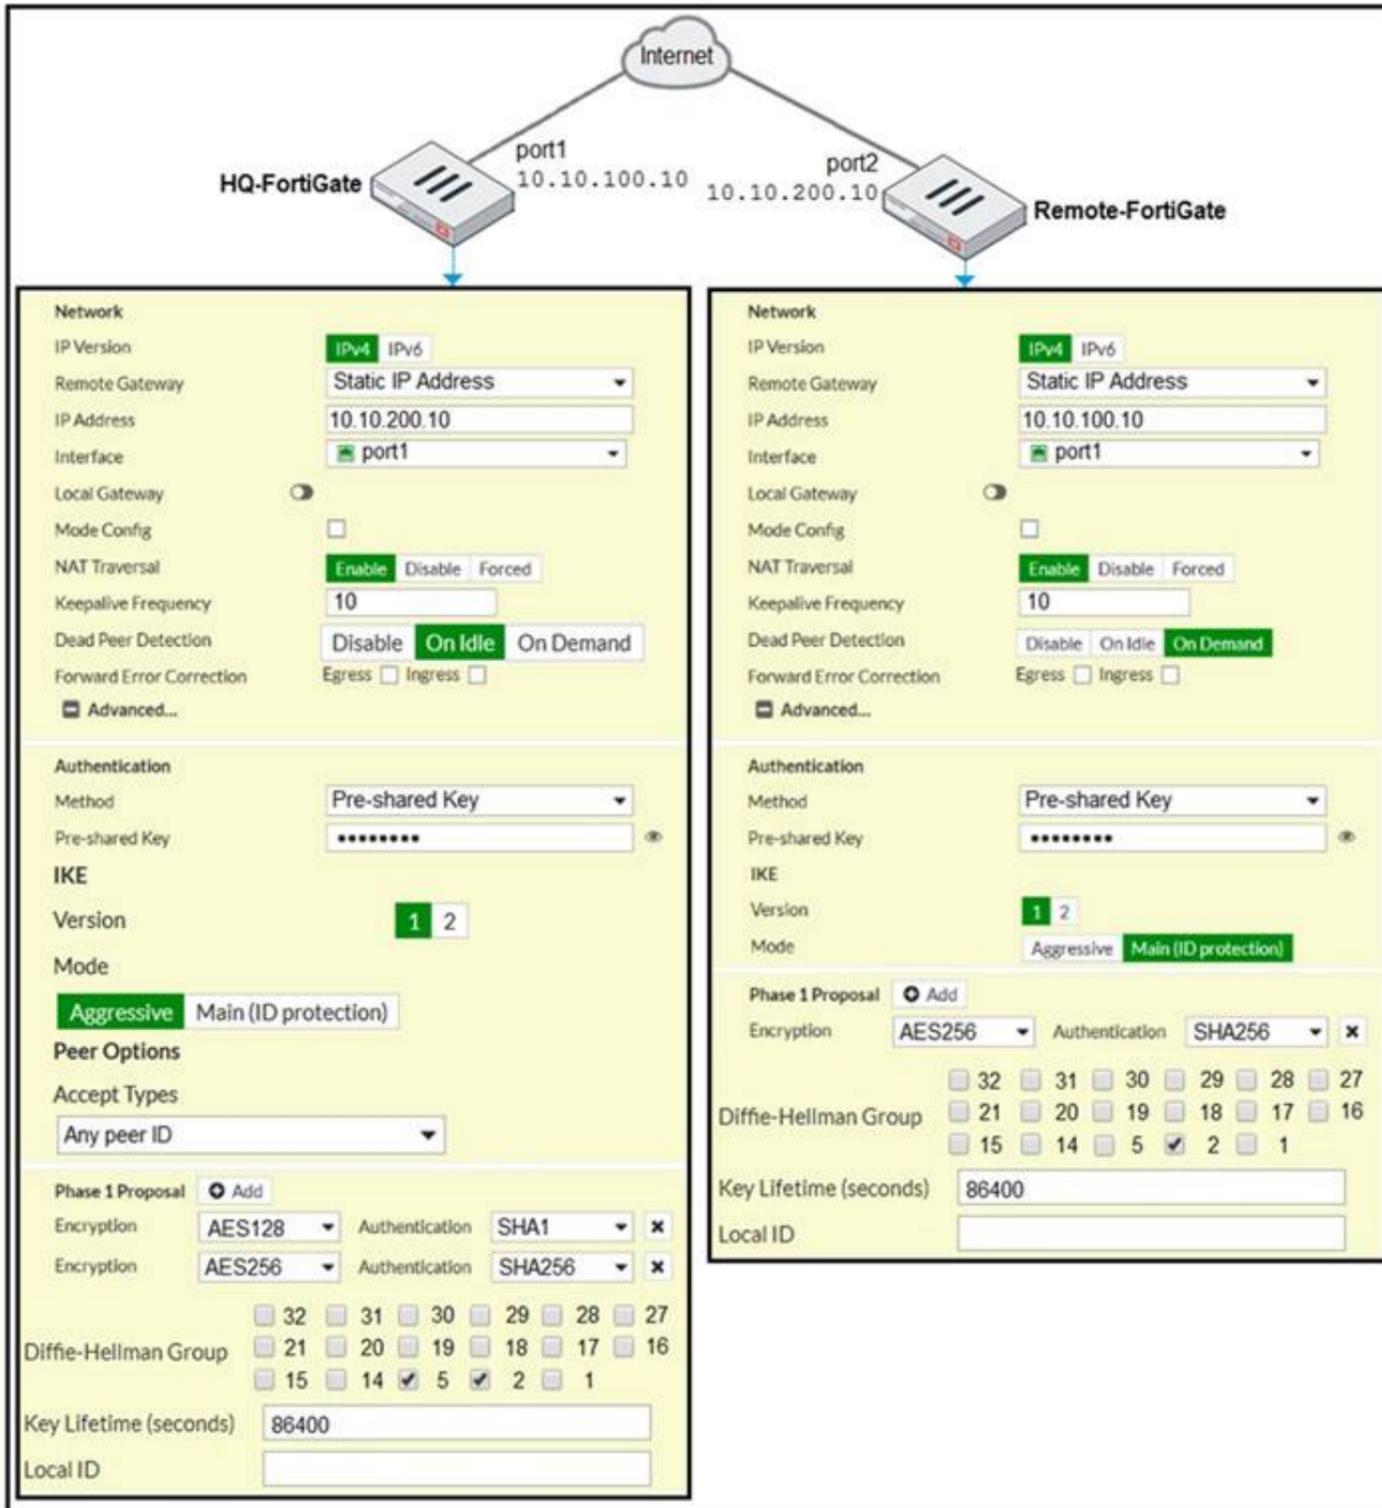

Based on the phase 1 configuration and the diagram shown in the exhibit, which two configuration changes will bring phase 1 up? (Choose two.)

- A. On HQ-FortiGate, set IKE mode to Main (ID protection).
- B. On both FortiGate devices, set Dead Peer Detection to On Demand.
- C. On HQ-FortiGate, disable Diffie-Helma group 2.
- D. On Remote-FortiGate, set port2 as Interface.

Answer: AD

NEW QUESTION 63

Which of the following SD-WAN load balancing method use interface weight value to distribute traffic? (Choose two.)

- A. Source IP
- B. Spillover
- C. Volume
- D. Session

Answer: CD

Explanation:

<https://docs.fortinet.com/document/fortigate/6.0.0/handbook/49719/configuring-sd-wan-load-balancing>

NEW QUESTION 66

.....

Relate Links

100% Pass Your NSE4_FGT-7.2 Exam with Exambible Prep Materials

https://www.exambible.com/NSE4_FGT-7.2-exam/

Contact us

We are proud of our high-quality customer service, which serves you around the clock 24/7.

Viste - <https://www.exambible.com/>