

Exam Questions NSE4_FGT-7.2

Fortinet NSE 4 - FortiOS 7.2

https://www.2passeasy.com/dumps/NSE4_FGT-7.2/



NEW QUESTION 1

Which three criteria can a FortiGate use to look for a matching firewall policy to process traffic? (Choose three.)

- A. Source defined as Internet Services in the firewall policy.
- B. Destination defined as Internet Services in the firewall policy.
- C. Highest to lowest priority defined in the firewall policy.
- D. Services defined in the firewall policy.
- E. Lowest to highest policy ID number.

Answer: ABD

Explanation:

When a packet arrives, how does FortiGate find a matching policy? Each policy has match criteria, which you can define using the following objects:

- Incoming Interface
- Outgoing Interface
- Source: IP address, user, internet services
- Destination: IP address or internet services
- Service: IP protocol and port number
- Schedule: Applies during configured times

NEW QUESTION 2

Which two statements explain antivirus scanning modes? (Choose two.)

- A. In proxy-based inspection mode, files bigger than the buffer size are scanned.
- B. In flow-based inspection mode, FortiGate buffers the file, but also simultaneously transmits it to the client.
- C. In proxy-based inspection mode, antivirus scanning buffers the whole file for scanning, before sending it to the client.
- D. In flow-based inspection mode, files bigger than the buffer size are scanned.

Answer: BC

Explanation:

An antivirus profile in full scan mode buffers up to your specified file size limit. The default is 10 MB. That is large enough for most files, except video files. If your FortiGate model has more RAM, you may be able to increase this threshold. Without a limit, very large files could exhaust the scan memory. So, this threshold balances risk and performance. Is this tradeoff unique to FortiGate, or to a specific model? No. Regardless of vendor or model, you must make a choice. This is because of the difference between scans in theory, that have no limits, and scans on real-world devices, that have finite RAM. In order to detect 100% of malware regardless of file size, a firewall would need infinitely large RAM--something that no device has in the real world. Most viruses are very small. This table shows a typical tradeoff. You can see that with the default 10 MB threshold, only 0.01% of viruses pass through.

FortiGate Security 7.2 Study Guide (p.350 & 352): "In flow-based inspection mode, the IPS engine reads the payload of each packet, caches a local copy, and forwards the packet to the receiver at the same time. Because the file is transmitted simultaneously, flow-based mode consumes more CPU cycles than proxy-based." "Each protocol's proxy picks up a connection and buffers the entire file first (or waits until the oversize limit is reached) before scanning. The client must wait for the scanning to finish."

NEW QUESTION 3

An administrator is configuring an IPsec VPN between site A and site B. The Remote Gateway setting in both sites has been configured as Static IP Address. For site A, the local quick mode selector is 192. 168. 1.0/24 and the remote quick mode selector is 192. 168.2.0/24.

Which subnet must the administrator configure for the local quick mode selector for site B?

- A. 192. 168. 1.0/24
- B. 192. 168.0.0/24
- C. 192. 168.2.0/24
- D. 192. 168.3.0/24

Answer: C

Explanation:

For an IPsec VPN between site A and site B, the administrator has configured the local quick mode selector for site A as 192.168.1.0/24 and the remote quick mode selector as 192.168.2.0/24. This means that the VPN will allow traffic to and from the 192.168.1.0/24 subnet at site A to reach the 192.168.2.0/24 subnet at site B.

To complete the configuration, the administrator must configure the local quick mode selector for site B. To do this, the administrator must use the same subnet as the remote quick mode selector for site A, which is 192.168.2.0/24. This will allow traffic to and from the 192.168.2.0/24 subnet at site B to reach the 192.168.1.0/24 subnet at site A.

Therefore, the administrator must configure the local quick mode selector for site B as 192.168.2.0/24.

NEW QUESTION 4

Refer to the exhibit.

Name	Severity	Target	OS	Action	CVE-ID
IPS Signature 1					
FTP.Login.Failed	1	Server	All	Pass	

Review the Intrusion Prevention System (IPS) profile signature settings. Which statement is correct in adding the FTP.Login.Failed signature to the IPS sensor profile?

- A. The signature setting uses a custom rating threshold.
- B. The signature setting includes a group of other signatures.
- C. Traffic matching the signature will be allowed and logged.
- D. Traffic matching the signature will be silently dropped and logged.

Answer: D

Explanation:

Select Block to silently drop traffic matching any of the signatures included in the entry. So, while the default action would be 'Pass' for this signature the administrator is specifically overriding that to set the Block action. To use the default action the setting would have to be 'Default'. Action is drop, signature default action is listed only in the signature, it would only match if action was set to default.

NEW QUESTION 5

If the Services field is configured in a Virtual IP (VIP), which statement is true when central NAT is used?

- A. The Services field prevents SNAT and DNAT from being combined in the same policy.
- B. The Services field is used when you need to bundle several VIPs into VIP groups.
- C. The Services field removes the requirement to create multiple VIPs for different services.
- D. The Services field prevents multiple sources of traffic from using multiple services to connect to a single computer.

Answer: C

NEW QUESTION 6

Which statement correctly describes NetAPI polling mode for the FSSO collector agent?

- A. The collector agent uses a Windows API to query DCs for user logins.
- B. NetAPI polling can increase bandwidth usage in large networks.
- C. The collector agent must search security event logs.
- D. The NetSession Enum function is used to track user logouts.

Answer: D

Explanation:

FortiGate_Infrastructure_7.0 page 270: "NetAPI: polls temporary sessions created on the DC when a user logs in or logs out and calls the NetSessionEnum function in Windows."

NEW QUESTION 7

Which two settings can be separately configured per VDOM on a FortiGate device? (Choose two.)

- A. System time
- B. FortiGuaid update servers
- C. Operating mode
- D. NGFW mode

Answer: CD

Explanation:

C: "Operating mode is per-VDOM setting. You can combine transparent mode VDOM's with NAT mode VDOMs on the same physical Fortigate.
D: "Inspection-mode selection has moved from VDOM to firewall policy, and the default inspection-mode is flow, so NGFW Mode can be changed from Profile-base (Default) to Policy-base directly in System > Settings from the VDOM" Page 125 of FortiGate_Infrastructure_6.4_Study_Guide

NEW QUESTION 8

If Internet Service is already selected as Source in a firewall policy, which other configuration objects can be added to the Source field of a firewall policy?

- A. IP address
- B. Once Internet Service is selected, no other object can be added
- C. User or User Group
- D. FQDN address

Answer: B

NEW QUESTION 9

Which two protocols are used to enable administrator access of a FortiGate device? (Choose two.)

- A. SSH
- B. HTTPS
- C. FTM
- D. FortiTelemetry

Answer: AB

NEW QUESTION 10


What are two benefits of flow-based inspection compared to proxy-based inspection? (Choose two.)

- A. FortiGate uses fewer resources.
- B. FortiGate performs a more exhaustive inspection on traffic.
- C. FortiGate adds less latency to traffic.
- D. FortiGate allocates two sessions per connection.

Answer: AC

NEW QUESTION 10

A network administrator is troubleshooting an IPsec tunnel between two FortiGate devices. The administrator has determined that phase 1 fails to come up. The administrator has also re-entered the pre-shared key on both FortiGate devices to make sure they match.

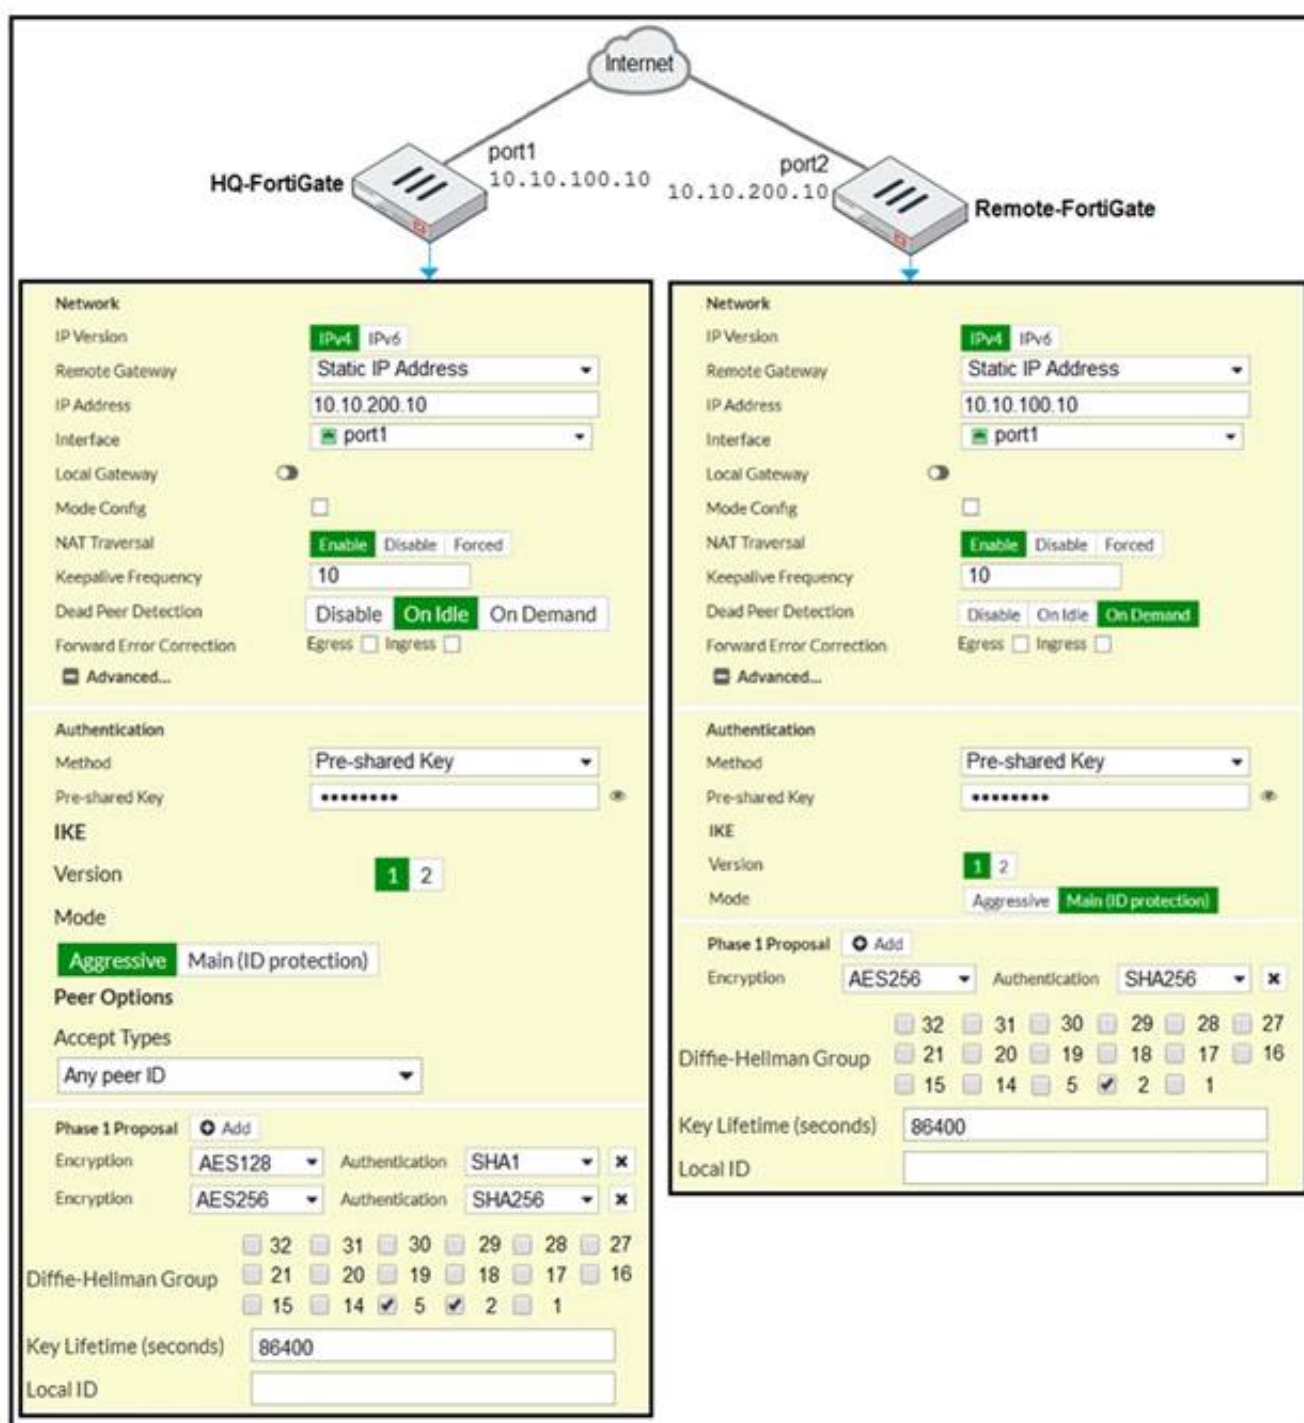

Based on the phase 1 configuration and the diagram shown in the exhibit, which two configuration changes will bring phase 1 up? (Choose two.)

- A. On HQ-FortiGate, set IKE mode to Main (ID protection).
- B. On both FortiGate devices, set Dead Peer Detection to On Demand.
- C. On HQ-FortiGate, disable Diffie-Hellman group 2.
- D. On Remote-FortiGate, set port2 as Interface.

Answer: AD

Explanation:

"In IKEv1, there are two possible modes in which the IKE SA negotiation can take place: main, and aggressive mode. Settings on both ends must agree; otherwise, phase 1 negotiation fails and both IPsec peers are not able to establish a secure channel."

NEW QUESTION 13

Which two statements are correct regarding FortiGate FSSO agentless polling mode? (Choose two.)

- A. FortiGate points the collector agent to use a remote LDAP server.
- B. FortiGate uses the AD server as the collector agent.
- C. FortiGate uses the SMB protocol to read the event viewer logs from the DCs.
- D. FortiGate queries AD by using the LDAP to retrieve user group information.

Answer: CD

Explanation:

Fortigate Infrastructure 7.0 Study Guide P.272-273 <https://kb.fortinet.com/kb/documentLink.do?externalID=FD47732>

NEW QUESTION 16

The IPS engine is used by which three security features? (Choose three.)

- A. Antivirus in flow-based inspection
- B. Web filter in flow-based inspection
- C. Application control
- D. DNS filter
- E. Web application firewall

Answer: ABC

Explanation:

FortiGate Security 7.2 Study Guide (p.385): "The IPS engine is responsible for most of the features shown in this lesson: IPS and protocol decoders. It's also responsible for application control, flow-based antivirus protection, web filtering, and email filtering."

NEW QUESTION 21

Which statement about the deployment of the Security Fabric in a multi-VDOM environment is true?

- A. VDOMs without ports with connected devices are not displayed in the topology.
- B. Downstream devices can connect to the upstream device from any of their VDOMs.
- C. Security rating reports can be run individually for each configured VDOM.
- D. Each VDOM in the environment can be part of a different Security Fabric.

Answer: A

Explanation:

FortiGate Security 7.2 Study Guide (p.436): "When you configure FortiGate devices in multi-vdom mode and add them to the Security Fabric, each VDOM with its assigned ports is displayed when one or more devices are detected. Only the ports with discovered and connected devices appear in the Security Fabric view and, because of this, you must enable Device Detection on ports you want to have displayed in the Security Fabric. VDOMs without ports with connected devices are not displayed. All VDOMs configured must be part of a single Security Fabric."

NEW QUESTION 26

Which of the following are valid actions for FortiGuard category based filter in a web filter profile ui proxy-based inspection mode? (Choose two.)

- A. Warning
- B. Exempt
- C. Allow
- D. Learn

Answer: AC

NEW QUESTION 27

Which scanning technique on FortiGate can be enabled only on the CLI?

- A. Heuristics scan
- B. Trojan scan
- C. Antivirus scan
- D. Ransomware scan

Answer: A

NEW QUESTION 29

Which two inspection modes can you use to configure a firewall policy on a profile-based next-generation firewall (NGFW)? (Choose two.)

- A. Proxy-based inspection
- B. Certificate inspection
- C. Flow-based inspection
- D. Full Content inspection

Answer: AC

NEW QUESTION 30

Which statement is correct regarding the use of application control for inspecting web applications?

- A. Application control can identify child and parent applications, and perform different actions on them.
- B. Application control signatures are organized in a nonhierarchical structure.
- C. Application control does not require SSL inspection to identify web applications.
- D. Application control does not display a replacement message for a blocked web application.

Answer: A

Explanation:

Application control is a feature that allows FortiGate to inspect and control the use of specific web applications on the network. When application control is enabled, FortiGate can identify child and parent applications, and can perform different actions on them based on the configuration.

NEW QUESTION 33

Which three security features require the intrusion prevention system (IPS) engine to function? (Choose three.)

- A. Web filter in flow-based inspection
- B. Antivirus in flow-based inspection
- C. DNS filter
- D. Web application firewall
- E. Application control

Answer: ABE

Explanation:

<https://docs.fortinet.com/document/fortigate/7.0.0/new-features/739623/dns-filter-handled-by-ips-engine-in-flow>

NEW QUESTION 38

An administrator has configured two-factor authentication to strengthen SSL VPN access. Which additional best practice can an administrator implement?

- A. Configure Source IP Pools.
- B. Configure split tunneling in tunnel mode.
- C. Configure different SSL VPN realms.
- D. Configure host check .

Answer: D

NEW QUESTION 39

Which three statements are true regarding session-based authentication? (Choose three.)

- A. HTTP sessions are treated as a single user.
- B. IP sessions from the same source IP address are treated as a single user.
- C. It can differentiate among multiple clients behind the same source IP address.
- D. It requires more resources.
- E. It is not recommended if multiple users are behind the source NAT

Answer: ACD

NEW QUESTION 43

Refer to the exhibit.



The screenshot shows the FortiGate SLA configuration page. The Name is 'SLA1'. The Protocol is 'Ping'. The Server field has two entries: '4.2.2.2' and '4.2.2.1'. The Participants field is set to 'All SD-WAN Members'. The 'Enable probe packets' checkbox is unchecked.

An administrator has configured a performance SLA on FortiGate, which failed to generate any traffic. Why is FortiGate not sending probes to 4.2.2.2 and 4.2.2.1 servers? (Choose two.)

- A. The Detection Mode setting is not set to Passive.
- B. Administrator didn't configure a gateway for the SD-WAN members, or configured gateway is not valid.
- C. The configured participants are not SD-WAN members.
- D. The Enable probe packets setting is not enabled.

Answer: BD

NEW QUESTION 45

Refer to the exhibit.

The exhibit shows the output of a diagnose command.

```
# diagnose firewall proute list
list route policy info(vf=root):
id=2130903041(0x7f030001) vwl_service=1(Critical-DIA) vwl_mbr_seq=1 2 dscp_tag=0xff 0xff
flags=0x0 tos=0x00 tos_mask=0x00 protocol=0 sport=0-65535 iif=0 dport=1-65535 path(2)
oif=3(port1) oif=4(port2)
source(1): 10.0.1.0-10.0.1.255
destination wildcard(1): 0.0.0.0/0.0.0.0
internet service(3): GoToMeeting(4294836966,0,0,0, 16354)
Microsoft.Office.365.Portal(4294837474,0,0,0, 41468) Salesforce(4294837976,0,0,0, 16920)
hit_count=0 last_used=2022-02-23 05:46:43
```

What does the output reveal about the policy route?

- A. It is an ISDB route in policy route.
- B. It is a regular policy route.
- C. It is an ISDB policy route with an SDWAN rule.
- D. It is an SDWAN rule in policy route.

Answer: D

Explanation:

FortiGate Infrastructure 7.2 Study Guide (p.59): "ISDB routes and SD-WAN rules are assigned an ID higher than 65535. However, SD-WAN rule entries include the vwl_service field, and ISDB route entries don't."

NEW QUESTION 46

An administrator is configuring an Ipsec between site A and siteB. The Remotes Gateway setting in both sites has been configured as Static IP Address. For site A, the local quick mode selector is 192. 16. 1.0/24 and the remote quick mode selector is 192. 16.2.0/24. How must the administrator configure the local quick mode selector for site B?

- A. 192. 168.3.0/24
- B. 192. 168.2.0/24
- C. 192. 168. 1.0/24
- D. 192. 168.0.0/8

Answer: B

NEW QUESTION 48

Which three options are the remote log storage options you can configure on FortiGate? (Choose three.)

- A. FortiCache
- B. FortiSIEM
- C. FortiAnalyzer
- D. FortiSandbox
- E. FortiCloud

Answer: BCE

NEW QUESTION 53

Which CLI command will display sessions both from client to the proxy and from the proxy to the servers?

- A. diagnose wad session list
- B. diagnose wad session list | grep hook-pre&&hook-out
- C. diagnose wad session list | grep hook=pre&&hook=out
- D. diagnose wad session list | grep "hook=pre"&"hook=out"

Answer: A

NEW QUESTION 55

On FortiGate, which type of logs record information about traffic directly to and from the FortiGate management IP addresses?

- A. System event logs
- B. Forward traffic logs
- C. Local traffic logs
- D. Security logs

Answer: C

NEW QUESTION 56

Which two statements are true about the FGCP protocol? (Choose two.)

- A. FGCP elects the primary FortiGate device.
- B. FGCP is not used when FortiGate is in transparent mode.
- C. FGCP runs only over the heartbeat links.
- D. FGCP is used to discover FortiGate devices in different HA groups.

Answer: AC

Explanation:

The FGCP (FortiGate Clustering Protocol) is a protocol that is used to manage high availability (HA) clusters of FortiGate devices. It performs several functions, including the following:

FGCP elects the primary FortiGate device: In an HA cluster, FGCP is used to determine which FortiGate device will be the primary device, responsible for handling traffic and making decisions about what to allow or block. FGCP uses a variety of factors, such as the device's priority, to determine which device should be the primary.

FGCP runs only over the heartbeat links: FGCP communicates between FortiGate devices in the HA cluster using the heartbeat links. These are dedicated links that are used to exchange status and control information between the devices. FGCP does not run over other types of links, such as data links.

NEW QUESTION 60

Which two statements are true about the Security Fabric rating? (Choose two.)

- A. It provides executive summaries of the four largest areas of security focus.
- B. Many of the security issues can be fixed immediately by clicking Apply where available.
- C. The Security Fabric rating must be run on the root FortiGate device in the Security Fabric.
- D. The Security Fabric rating is a free service that comes bundled with all FortiGate devices.

Answer: BC

NEW QUESTION 63

Examine this output from a debug flow:

```
id=20085 trace_id=1 func=print_pkt_detail line=5363 msg="vd-root received a packet(proto=1,
10.0.1.10:1->10.200.1.254:2048)
from port3. type=8, code=0, id=1, seq=33."
id=20085 trace_id=1 func=init_ip_session_common line=5519 msg="allocate a new session=00000340"
id=20085 trace_id=1 func=vf_ip_route_input_common line=2583 msg="find a route: flag=04000000 gw=10.200.1.254 via
port1"
id=20085 trace_id=1 func=fw_forward_handler line=586 msg="Denied by forward policy check (policy 0)"
```

Why did the FortiGate drop the packet?

- A. The next-hop IP address is unreachable.
- B. It failed the RPF check .
- C. It matched an explicitly configured firewall policy with the action DENY.
- D. It matched the default implicit firewall policy.

Answer: D

Explanation:

<https://kb.fortinet.com/kb/documentLink.do?externalID=13900> <https://www.fortinetguru.com/2016/03/what-is-policy-id-0-and-why-lot-of-denied-traffic-on-this-policy/>

NEW QUESTION 68

Which two statements about FortiGate FSSO agentless polling mode are true? (Choose two.)

- A. FortiGate uses the AD server as the collector agent.
- B. FortiGate uses the SMB protocol to read the event viewer logs from the DCs.
- C. FortiGate does not support workstation check .
- D. FortiGate directs the collector agent to use a remote LDAP server.

Answer: BC

Explanation:

You can deploy FSSO w/o installing an agent. FG polls the DCs directly, instead of receiving logon info indirectly from a collector agent.

Because FG collects all of the data itself, agentless polling mode requires greater system resources, and it doesn't scale as easily.

Agentless polling mode operates in a similar way to WinSecLog, but with only two event IDs: 4768 and 4769. Because there's no collector agent, FG uses the SMB protocol to read the event viewer logs from the DCs.

FG acts as a collector. It's responsible for polling on top of its normal FSSO tasks but does not have all the extra features, such as workstation checks, that are available with the external collector agent.

NEW QUESTION 69

Refer to the exhibit.


```

FGT1 # get router info routing-table database
Codes: K - kernel, C - connected, S - static, R - RIP, B - BGP
       O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
       > - selected route, * - FIB route, p - stale info

S      *> 0.0.0.0/0 [10/0] via 172.20.121.2, port1, [20/0]
      *>          [10/0] via 10.0.0.2, port2, [30/0]
S      0.0.0.0/0 [20/0] via 192.168.15.2, port3, [10/0]
C      *> 10.0.0.0/24 is directly connected, port2
S      172.13.24.0/24 [10.0] is directly connected, port4
C      *> 172.20.121.0/24 is directly connected, port1
S      *> 192.167.1.0/24 [10/0] via 10.0.0.2, port2
C      *> 192.168.15.0/24 is directly connected, port3
    
```

Given the routing database shown in the exhibit, which two statements are correct? (Choose two.)

- A. The port3 default route has the lowest metric.
- B. The port1 and port2 default routes are active in the routing table.
- C. The ports default route has the highest distance.
- D. There will be eight routes active in the routing table.

Answer: BC

Explanation:

<https://community.fortinet.com/t5/FortiGate/Technical-Tip-How-to-identify-Inactive-Routes-in-the-Routing/ta-p>

NEW QUESTION 70

Refer to the exhibit.

Name	Custom_Profile
Comments	<input type="text"/> 0/255
Access Permissions	
Access Control	Permissions Set All
Security Fabric	<input type="radio"/> None <input type="radio"/> Read <input checked="" type="radio"/> Read/Write
FortiView	<input type="radio"/> None <input type="radio"/> Read <input checked="" type="radio"/> Read/Write
User & Device	<input type="radio"/> None <input type="radio"/> Read <input checked="" type="radio"/> Read/Write
Firewall	<input type="radio"/> None <input checked="" type="radio"/> Read <input type="radio"/> Read/Write <input type="radio"/> Custom
Log & Report	<input type="radio"/> None <input checked="" type="radio"/> Read <input type="radio"/> Read/Write <input type="radio"/> Custom
Network	<input type="radio"/> None <input checked="" type="radio"/> Read <input type="radio"/> Read/Write <input type="radio"/> Custom
System	<input type="radio"/> None <input type="radio"/> Read <input checked="" type="radio"/> Read/Write <input type="radio"/> Custom
Security Profile	<input type="radio"/> None <input type="radio"/> Read <input checked="" type="radio"/> Read/Write <input type="radio"/> Custom
VPN	<input type="radio"/> None <input type="radio"/> Read <input checked="" type="radio"/> Read/Write
WAN Opt & Cache	<input type="radio"/> None <input type="radio"/> Read <input checked="" type="radio"/> Read/Write
WiFi & Switch	<input type="radio"/> None <input type="radio"/> Read <input checked="" type="radio"/> Read/Write
Permit usage of CLI diagnostic commands <input type="checkbox"/>	
<input type="checkbox"/> Override Idle Timeout	

Based on the administrator profile settings, what permissions must the administrator set to run the diagnose firewall auth list CLI command on FortiGate?

- A. Custom permission for Network
- B. Read/Write permission for Log & Report
- C. CLI diagnostics commands permission

D. Read/Write permission for Firewall

Answer: C

Explanation:

<https://kb.fortinet.com/kb/documentLink.do?externalID=FD50220>

NEW QUESTION 75

Which of the following are valid actions for FortiGuard category based filter in a web filter profile ui proxy-based inspection mode? (Choose two.)

- A. Warning
- B. Exempt
- C. Allow
- D. Learn

Answer: AC

NEW QUESTION 78

Refer to the exhibit.

```
session info: proto=6 proto_state=02 duration=6 expire=6 timeout=3600 flags=0000
0000 socktype=0 sockport=0 av_idx=0 use=3
origin-shaper=
reply-shaper=
per_ip_shaper=
class_id=0 ha_id=0 policy_dir=0 tunnel=/ vlan_cos=0/255
state=may_dirty
statistic(bytes/packets/allow_err): org=180/3/1 reply=264/3/1 tuples=2
tx speed(Bps/kbps): 26/0 rx speed(Bps/kbps): 39/0
origin->sink: org pre->post, reply pre->post dev=3->5/5->3 gwy=10.0.1.11/0.0.0.0
hook=pre dir=org act=dnat 10.200.3.1:38024->10.200.1.11:80(10.0.1.11:80)
hook=post dir=reply act=snat 10.0.1.11:80->10.200.3.1:38024(10.200.1.11:80)
pos/(before,after) 0/(0,0), 0/(0,0)
misc=0 policy_id=8 auth_info=0 chk_client_info=0 vd=0
serial=0001fb06 tos=ff/ff app_list=0 app=0 url_cat=0
rpd_b_link_id= 00000000 rpd_b_svc_id=0 ngfwid=n/a
npu_state=0x040000
```

Which contains a session diagnostic output. Which statement is true about the session diagnostic output?

- A. The session is in SYN_SENT state.
- B. The session is in FIN_ACK state.
- C. The session is in FTN_WAIT state.
- D. The session is in ESTABLISHED state.

Answer: A

Explanation:

Indicates TCP (proto=6) session in SYN_SENT state (proto=state=2) <https://kb.fortinet.com/kb/viewContent.do?externalId=FD30042>

NEW QUESTION 81

Which two statements are correct about a software switch on FortiGate? (Choose two.)

- A. It can be configured only when FortiGate is operating in NAT mode
- B. Can act as a Layer 2 switch as well as a Layer 3 router
- C. All interfaces in the software switch share the same IP address
- D. It can group only physical interfaces

Answer: AC

NEW QUESTION 84

Consider the topology:

Application on a Windows machine <--(SSL VPN)-->FGT--> Telnet to Linux server.

An administrator is investigating a problem where an application establishes a Telnet session to a Linux server over the SSL VPN through FortiGate and the idle session times out after about 90 minutes. The administrator would like to increase or disable this timeout.

The administrator has already verified that the issue is not caused by the application or Linux server. This issue does not happen when the application establishes a Telnet connection to the Linux server directly on the LAN.

What two changes can the administrator make to resolve the issue without affecting services running through FortiGate? (Choose two.)

- A. Set the maximum session TTL value for the TELNET service object.
- B. Set the session TTL on the SSLVPN policy to maximum, so the idle session timeout will not happen after 90 minutes.
- C. Create a new service object for TELNET and set the maximum session TTL.
- D. Create a new firewall policy and place it above the existing SSLVPN policy for the SSL VPN traffic, and set the new TELNET service object in the policy.

Answer: CD

NEW QUESTION 87

Why does FortiGate keep TCP sessions in the session table for some seconds even after both sides (client and server) have terminated the session?

- A. To remove the NAT operation.
- B. To generate logs
- C. To finish any inspection operations.
- D. To allow for out-of-order packets that could arrive after the FIN/ACK packets.

Answer: D

NEW QUESTION 91

Refer to the exhibits.

Edit Policy

Name	Facebook SSL Inspection
Incoming interface	port2
Outgoing interface	port1
Source	all
Destination	all
Service	ALL

Firewall/Network Options

CentralNAT is enabled so NAT settings from matching Central SNAT policies will be applied

Security Profiles

SSL Inspection SSL certificate-inspection

Edit Policy

Name	Facebook Access
Incoming interface	port2
Outgoing interface	port1
Source	all
Destination	all
Schedule	always
Service	AppDefault Specify
Application	Facebook Facebook_Like.Button Facebook_Video.Play
URL Category	+
	<input checked="" type="checkbox"/> ACCEPT <input type="checkbox"/> DENY

Firewall/Network Options

Protocol Options PROX default

The exhibits show the SSL and authentication policy (Exhibit A) and the security policy (Exhibit B) for Facebook .

Users are given access to the Facebook web application. They can play video content hosted on Facebook but they are unable to leave reactions on videos or other types of posts.

Which part of the policy configuration must you change to resolve the issue?

- A. Make SSL inspection needs to be a deep content inspection.
- B. Force access to Facebook using the HTTP service.
- C. Get the additional application signatures are required to add to the security policy.
- D. Add Facebook in the URL category in the security policy.

Answer: A

Explanation:

They can play video (tick) content hosted on Facebook, but they are unable to leave reactions on videos or other types of posts. This indicate that the rule are partially working as they can watch video but cant react, i.e. liking the content. So must be an issue with the SSL inspection rather then adding an app rule.

NEW QUESTION 93

Which CLI command allows administrators to troubleshoot Layer 2 issues, such as an IP address conflict?

- A. get system status
- B. get system performance status
- C. diagnose sys top
- D. get system arp

Answer: D

Explanation:

"If you suspect that there is an IP address conflict, or that an IP has been assigned to the wrong device, you may need to look at the ARP table."

NEW QUESTION 97

Which statement is correct regarding the security fabric?

- A. FortiManager is one of the required member devices.
- B. FortiGate devices must be operating in NAT mode.
- C. A minimum of two Fortinet devices is required.
- D. FortiGate Cloud cannot be used for logging purposes.


Answer: B

Explanation:

FortiGate Security 7.2 Study Guide (p.428): "You must have a minimum of two FortiGate devices at the core of the Security Fabric, plus one FortiAnalyzer or cloud logging solution. FortiAnalyzer Cloud or FortiGate Cloud can act as the cloud logging solution. The FortiGate devices must be running in NAT mode."

NEW QUESTION 101

Refer to the exhibit.

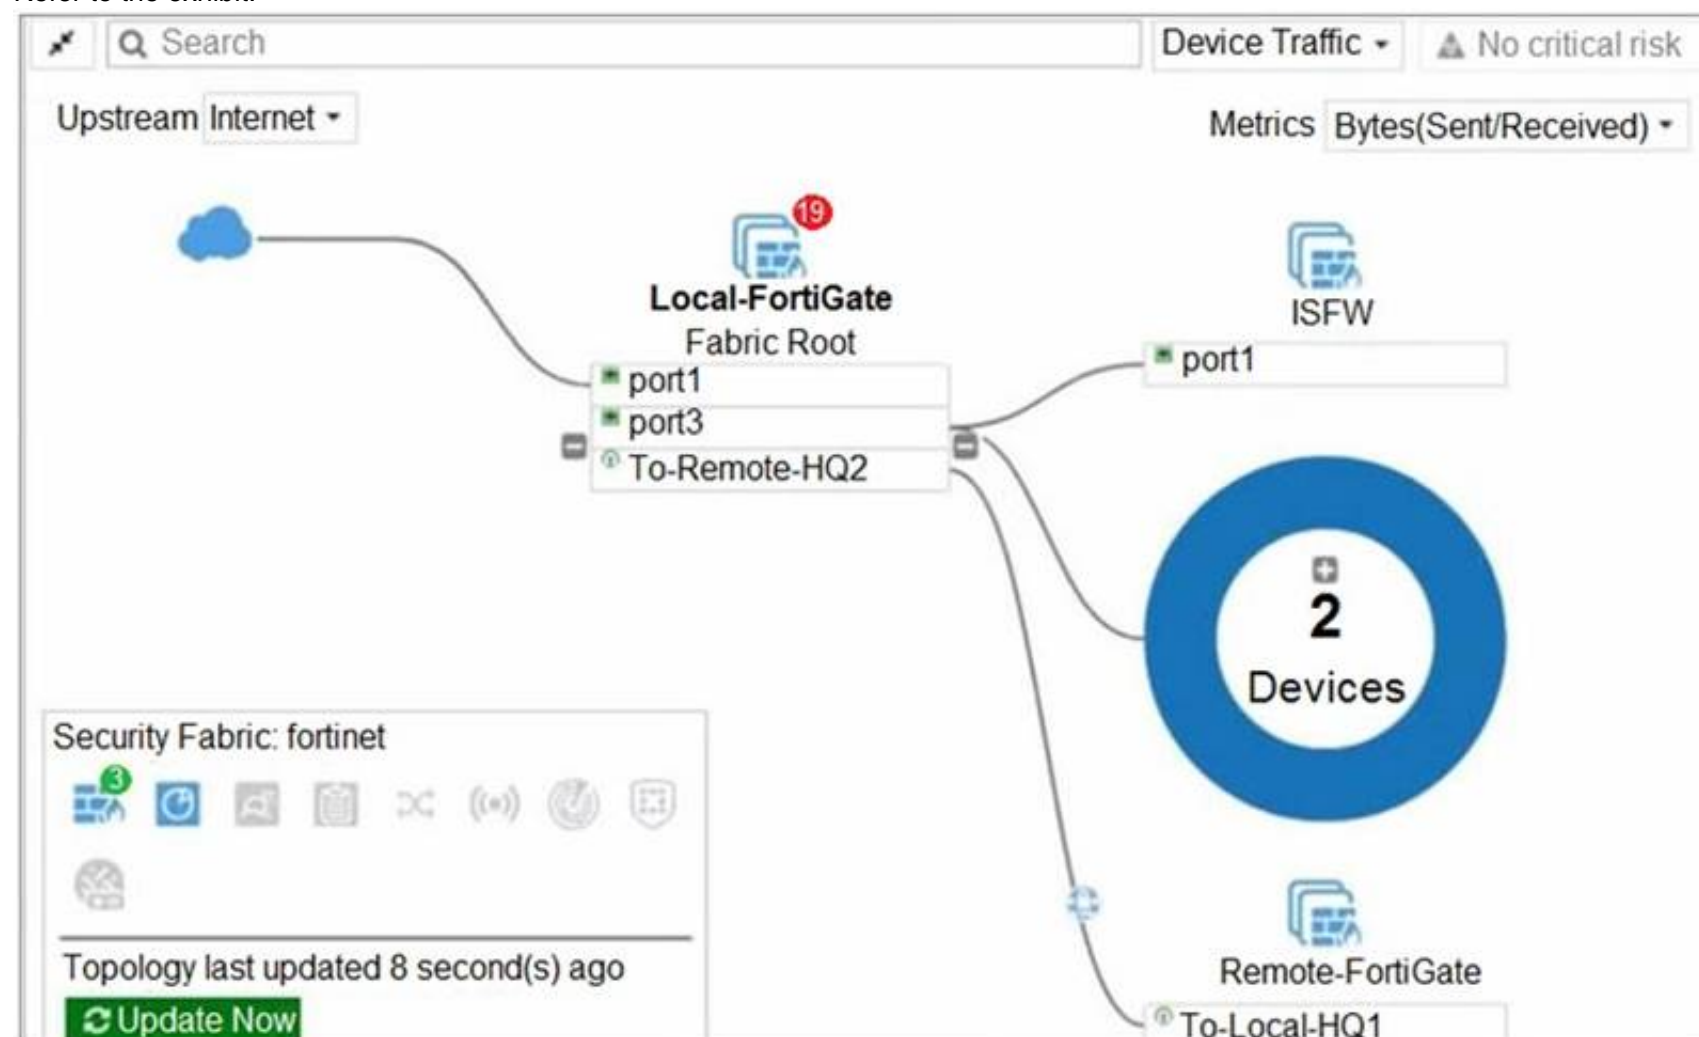

Given the security fabric topology shown in the exhibit, which two statements are true? (Choose two.)

- A. There are five devices that are part of the security fabric.
- B. Device detection is disabled on all FortiGate devices.
- C. This security fabric topology is a logical topology view.
- D. There are 19 security recommendations for the security fabric.

Answer: CD

Explanation:

References: <https://docs.fortinet.com/document/fortigate/5.6.0/cookbook/761085/results>

<https://docs.fortinet.com/document/fortimanager/6.2.0/new-features/736125/security-fabric-topology>

NEW QUESTION 102

Which certificate value can FortiGate use to determine the relationship between the issuer and the certificate?

- A. Subject Key Identifier value
- B. SMMIE Capabilities value
- C. Subject value
- D. Subject Alternative Name value

Answer: A

NEW QUESTION 107

Which of statement is true about SSL VPN web mode?

- A. The tunnel is up while the client is connected.
- B. It supports a limited number of protocols.
- C. The external network application sends data through the VPN.
- D. It assigns a virtual IP address to the client.

Answer: B

Explanation:

FortiGate_Security_6.4 page 575 - Web mode requires only a web browser, but supports a limited number of protocols.

NEW QUESTION 109

Refer to the exhibit showing a debug flow output.

```
id=20085 trace_id=1 func=print_pkt_detail line=5594 msg="vd-root:0 received a packet(proto=1,
10.0.1.10:19938->10.0.1.250:2048) from port1. type=8, code=0, id=19938, seq=1."
id=20085 trace_id=1 func=init_ip_session_common line=5760 msg="allocate a new session-00003dd5"
id=20085 trace_id=1 func=vf_ip_route_input_common line=2598 msg="find a route: flag=84000000 gw-
10.0.1.250 via root"
id=20085 trace_id=2 func=print_pkt_detail line=5594 msg="vd-root:0 received a packet(proto=1,
10.0.1.250:19938->10.0.1.10:0) from local. type=0, code=0, id=19938, seq=1."
id=20085 trace_id=2 func=resolve_ip_tuple_fast line=5675 msg="Find an existing session, id-
00003dd5, reply direction"
```

What two conclusions can you make from the debug flow output? (Choose two.)

- A. The debug flow is for ICMP traffic.
- B. The default route is required to receive a reply.
- C. A new traffic session was created.
- D. A firewall policy allowed the connection.

Answer: AC

Explanation:

The debug flow output shows the result of a diagnose command that captures the traffic flow between the source and destination IP addresses1. The debug flow output reveals the following information about the traffic flow1:

- The protocol is 1, which means that the traffic uses ICMP protocol2. ICMP is a protocol that is used to send error messages and test connectivity between devices2.
- The session state is 0, which means that a new traffic session was created3. A session is a data structure that stores information about a connection between two devices3.
- The policy ID is 1, which means that the traffic matched the firewall policy with ID 14. A firewall policy is a rule that defines how FortiGate processes traffic based on the source, destination, service, and action parameters4.
- The action is 0, which means that the traffic was allowed by the firewall policy. An action is a parameter that specifies what FortiGate does with the traffic that matches a firewall policy.

Therefore, two conclusions that can be made from the debug flow output are:

- The debug flow is for ICMP traffic.
- A new traffic session was created.

NEW QUESTION 110

An administrator has configured the following settings:

```
config system settings
set ses-denied-traffic enable
end
config system global
set block-session-timer 30
end
```

What are the two results of this configuration? (Choose two.)

- A. Device detection on all interfaces is enforced for 30 minutes.
- B. Denied users are blocked for 30 minutes.
- C. A session for denied traffic is created.
- D. The number of logs generated by denied traffic is reduced.

Answer: CD

Explanation:

ses-denied-traffic

Enable/disable including denied session in the session table. <https://docs.fortinet.com/document/fortigate/7.0.6/cli-reference/20620/config-system-settings-block->

session-timer

Duration in seconds for blocked sessions . integer

Minimum value: 1 Maximum value: 300

30

<https://docs.fortinet.com/document/fortigate/7.0.6/cli-reference/1620/config-system-global>

NEW QUESTION 112

Which statement correctly describes the use of reliable logging on FortiGate?

- A. Reliable logging is enabled by default in all configuration scenarios.
- B. Reliable logging is required to encrypt the transmission of logs.
- C. Reliable logging can be configured only using the CLI.
- D. Reliable logging prevents the loss of logs when the local disk is full.

Answer: B

Explanation:

FortiGate Security 7.2 Study Guide (p.192): "if using reliable logging, you can encrypt communications using SSL-encrypted OFTP traffic, so when a log message is generated, it is safely transmitted across an unsecure network. You can choose the level of SSL protection used by configuring the enc-algorithm setting on the CLI."

NEW QUESTION 113

What are two functions of ZTNA? (Choose two.)

- A. ZTNA manages access through the client only.
- B. ZTNA manages access for remote users only.
- C. ZTNA provides a security posture check.
- D. ZTNA provides role-based access.

Answer: CD

NEW QUESTION 115

.....

THANKS FOR TRYING THE DEMO OF OUR PRODUCT

Visit Our Site to Purchase the Full Set of Actual NSE4_FGT-7.2 Exam Questions With Answers.

We Also Provide Practice Exam Software That Simulates Real Exam Environment And Has Many Self-Assessment Features. Order the NSE4_FGT-7.2 Product From:

https://www.2passeasy.com/dumps/NSE4_FGT-7.2/

Money Back Guarantee

NSE4_FGT-7.2 Practice Exam Features:

- * NSE4_FGT-7.2 Questions and Answers Updated Frequently
- * NSE4_FGT-7.2 Practice Questions Verified by Expert Senior Certified Staff
- * NSE4_FGT-7.2 Most Realistic Questions that Guarantee you a Pass on Your FirstTry
- * NSE4_FGT-7.2 Practice Test Questions in Multiple Choice Formats and Updatesfor 1 Year