

NSE5_FAZ-7.2 Dumps


Fortinet NSE 5 - FortiAnalyzer 7.2

https://www.certleader.com/NSE5_FAZ-7.2-dumps.html



NEW QUESTION 1

Refer to the exhibit.

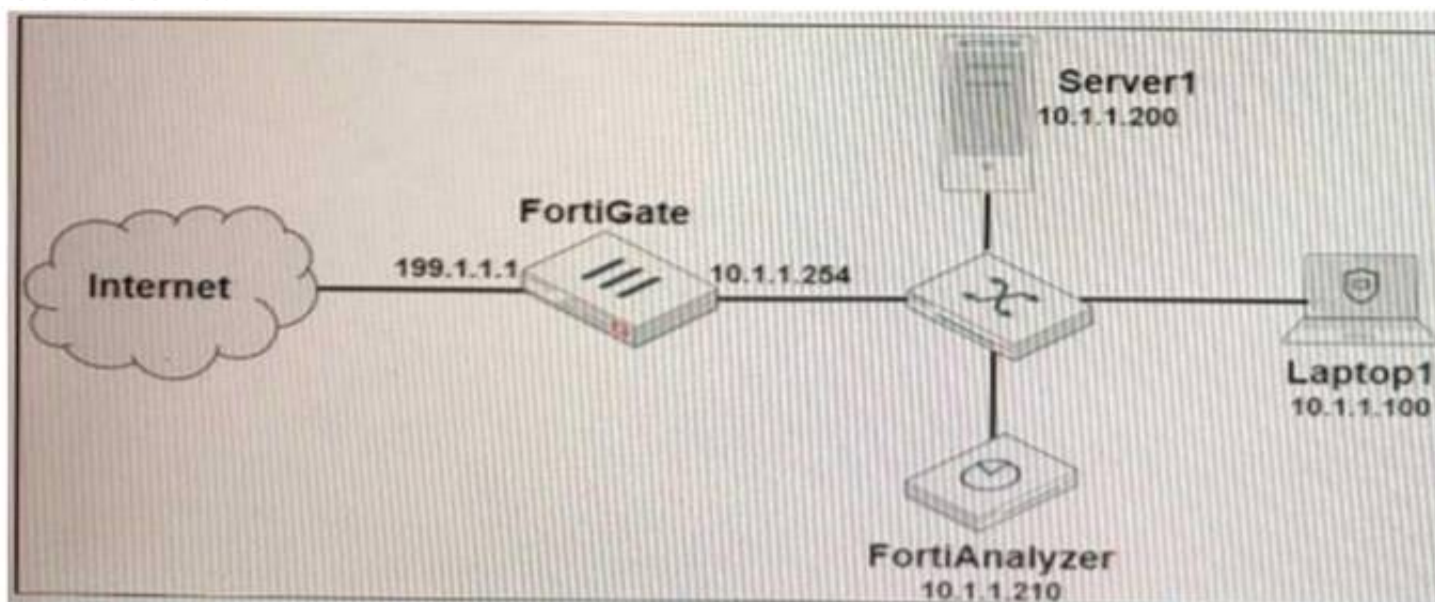

Laptop1 is used by several administrators to manage FortiAnalyzer. You want to configure a generic text filter that matches all login attempts to the web interface generated by any user other than "admin" and coming from Laptop1:
Which filter will achieve the desired result?

- A. operation-login & performed_on=="GUI(10.1.1.100)" & user!=admin
- B. operation-login & srcip==10.1.1.100 & dstip==10.1.1.210 & user==admin
- C. operation-login & dstip==10.1.1.210 & user!=admin
- D. operation-login & performed_on=="GUI(10.1.1.210)" & user!=admin

Answer: A

Explanation:

On there the task was to create a filter for failed logins from any other location but the local computer: "Add the text performed_on!~10.0.1.10. This includes any attempts coming from devices with an IP address that is not the one configured on the Local-Client computer."

NEW QUESTION 2

Which statements are true regarding securing communications between FortiAnalyzer and FortiGate with SSL? (Choose two.)

- A. SSL is the default setting.
- B. SSL communications are auto-negotiated between the two devices.
- C. SSL can send logs in real-time only.
- D. SSL encryption levels are globally set on FortiAnalyzer.
- E. FortiAnalyzer encryption level must be equal to, or higher than, FortiGate.

Answer: AD

NEW QUESTION 3

What are two of the key features of FortiAnalyzer? (Choose two.)

- A. Centralized log repository
- B. Cloud-based management
- C. Reports
- D. Virtual domains (VDOMs)

Answer: AC

NEW QUESTION 4

Which statements are true of Administrative Domains (ADOMs) in FortiAnalyzer? (Choose two.)

- A. ADOMs are enabled by default.
- B. ADOMs constrain other administrator's access privileges to a subset of devices in the device list.
- C. Once enabled, the Device Manager, FortiView, Event Management, and Reports tab display per ADOM.
- D. All administrators can create ADOMs--not just the admin administrator.

Answer: BC

NEW QUESTION 5

What statements are true regarding the "store and upload" log transfer option between FortiAnalyzer and FortiGate? (Choose three.)

- A. All FortiGates can send logs to FortiAnalyzer using the store and upload option.
- B. Only FortiGate models with hard disks can send logs to FortiAnalyzer using the store and upload option.
- C. Both secure communications methods (SSL and IPsec) allow the store and upload option.
- D. Disk logging is enabled on the FortiGate through the CLI only.
- E. Disk logging is enabled by default on the FortiGate.

Answer: BCD

NEW QUESTION 6

What must you configure on FortiAnalyzer to upload a FortiAnalyzer report to a supported external server? (Choose two.)

- A. SFTP, FTP, or SCP server
- B. Mail server
- C. Output profile
- D. Report scheduling

Answer: AC

Explanation:

<https://docs.fortinet.com/document/fortianalyzer/6.0.2/administration-guide/598322/creating-output-profiles>

NEW QUESTION 7

Which two purposes does the auto cache setting on reports serve? (Choose two.)

- A. It automatically updates the hcache when new logs arrive.
- B. It provides diagnostics on report generation time.
- C. It reduces the log insert lag rate.
- D. It reduces report generation time.

Answer: AD

NEW QUESTION 8


Which log type does the FortiAnalyzer indicators of compromise feature use to identify infected hosts?

- A. Antivirus logs
- B. Web filter logs
- C. IPS logs
- D. Application control logs

Answer: B

NEW QUESTION 9

Refer to the exhibit.

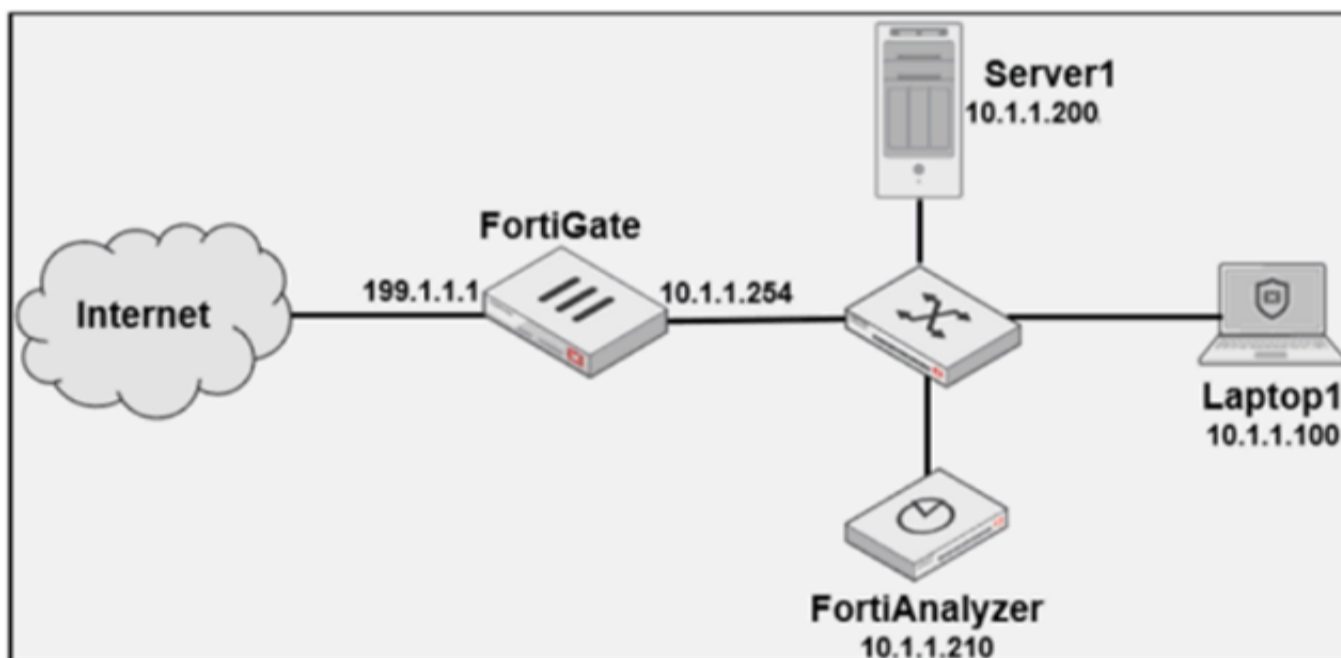

Laptop1 is used by several administrators to manage FortiAnalyzer. You want to configure a generic text filter that matches all login attempts to the web interface generated by any user other than "admin", and coming from Laptop1.

Which filter will achieve the desired result?

- A. operation-login & dstip==10.1.1.210 & user!=admin
- B. operation-login & srcip==10.1.1.100 & dstip==10.1.1.210 & user==admin
- C. operation-login & performed_on=="GUI(10.1.1.210)" & user!=admin
- D. operation-login & performed_on=="GUI(10.1.1.100)" & user!=admin

Answer: D

NEW QUESTION 10

An administrator has moved FortiGate A from the root ADOM to ADOM1. Which two statements are true regarding logs? (Choose two.)

- A. Analytics logs will be moved to ADOM1 from the root ADOM automatically.
- B. Archived logs will be moved to ADOM1 from the root ADOM automatically.
- C. Logs will be presented in both ADOMs immediately after the move.
- D. Analytics logs will be moved to ADOM1 from the root ADOM after you rebuild the ADOM1 SQL database.

Answer: BD

NEW QUESTION 10

If a hard disk fails on a FortiAnalyzer that supports software RAID, what should you do to bring the FortiAnalyzer back to functioning normally, without losing data?

- A. Hot swap the disk
- B. Replace the disk and rebuild the RAID manually
- C. Take no action if the RAID level supports a failed disk
- D. Shut down FortiAnalyzer and replace the disk

Answer: D

Explanation:

<https://kb.fortinet.com/kb/documentLink.do?externalID=FD46446#:~:text=On%20FortiAnalyzer%2FFortiMana> If a hard disk on a FortiAnalyzer unit fails, it must be replaced. On FortiAnalyzer devices that support hardware RAID, the hard disk can be replaced while the unit is still running – known as hot swapping. On FortiAnalyzer units with software RAID, the device must be shutdown prior to exchanging the hard disk.

NEW QUESTION 12

How can you configure FortiAnalyzer to permit administrator logins from only specific locations?

- A. Use static routes
- B. Use administrative profiles
- C. Use trusted hosts
- D. Use secure protocols

Answer: C

Explanation:

<https://docs.fortinet.com/document/fortianalyzer/6.2.5/administration-guide/186508/trusted-hosts>

NEW QUESTION 16

Which statement is true when you are upgrading the firmware on an HA cluster made up of two FortiAnalyzer devices?

- A. First, upgrade the secondary device, and then upgrade the primary device.
- B. Both FortiAnalyzer devices will be upgraded at the same time.
- C. You can enable uninterruptible-upgrade so that the normal FortiAnalyzer operations are not interrupted while the cluster firmware upgrades.
- D. You can perform the firmware upgrade using only a console connection.

Answer: A

Explanation:

FortiAnalyzer_7.0_Study_Guide-Online.pdf page 64: To upgrade FortiAnalyzer HA cluster firmware:

- * 1. Log in to each secondary device.
- * 2. Upgrade the firmware of all secondary devices.
- * 3. Wait for the upgrades to complete and verify that all secondary devices joined the cluster.
- * 4. Verify that logs on all secondary devices are synchronized with the primary device.
- * 5. Upgrade the primary device.

<https://docs.fortinet.com/document/fortianalyzer/7.2.0/upgrade-guide/262607/upgrading-fortianalyzer-firmware>

NEW QUESTION 18

You need to upgrade your FortiAnalyzer firmware.

What happens to the logs being sent to FortiAnalyzer from FortiGate during the time FortiAnalyzer is temporarily unavailable?

- A. FortiAnalyzer uses log fetching to retrieve the logs when back online
- B. FortiGate uses the miglogd process to cache the logs
- C. The logfiled process stores logs in offline mode
- D. Logs are dropped

Answer: B

Explanation:

If FortiAnalyzer becomes unavailable to FortiGate for any reason, FortiGate uses its *miglogd* process to cache the logs. There is a maximum value to the cache size, and the miglogd process will drop cached logs. When the connection between the two devices is restored, the miglogd process begins to send the cached logs to FortiAnalyzer. Therefore, the FortiGate buffer will keeps logs long enough to sustain a reboot of your FortiAnalyzer (if you are upgrading the firmware, for example). But it is not intended for a lengthy FortiAnalyzer outage.

NEW QUESTION 20

In order for FortiAnalyzer to collect logs from a FortiGate device, what configuration is required? (Choose two.)

- A. Remote logging must be enabled on FortiGate
- B. Log encryption must be enabled
- C. ADOMs must be enabled
- D. FortiGate must be registered with FortiAnalyzer

Answer: AD

Explanation:

Pg 70: “after you add and register a FortiGate device with the FortiAnalyzer unit, you must also ensure that the FortiGate device is configured to send logs to the FortiAnalyzer unit.”

<https://docs.fortinet.com/uploaded/files/4614/FortiAnalyzer-5.4.6-Administration%20Guide.pdf>

Pg 45: "ADOMs must be enabled to support the logging and reporting of NON-FORTIGATE devices, such as FortiCarrier, FortiClientEMS, FortiMail, FortiWeb, FortiCache, and FortiSandbox."

NEW QUESTION 25

What is Log Insert Lag Time on FortiAnalyzer?

- A. The number of times in the logs where end users experienced slowness while accessing resources.
- B. The amount of lag time that occurs when the administrator is rebuilding the ADOM database.
- C. The amount of time that passes between the time a log was received and when it was indexed on FortiAnalyzer.
- D. The amount of time FortiAnalyzer takes to receive logs from a registered device

Answer: C

NEW QUESTION 28

Which statement describes a dataset in FortiAnalyzer?

- A. They determine what data is retrieved from the databas
- B. They provide the layout used for reports.
- C. They are used to set the data included in template
- D. They define the chart types to be used in report

Answer: A

NEW QUESTION 33

Which statement about the FortiSOAR management extension is correct?

- A. It requires a FortiManager configured to manage FortiGate
- B. It requires a dedicated FortiSOAR device or VM.
- C. It does not include a limited trial by default.
- D. It runs as a docker container on FortiAnalyzer

Answer: D

NEW QUESTION 35

On FortiAnalyzer, what is a wildcard administrator account?

- A. An account that permits access to members of an LDAP group
- B. An account that allows guest access with read-only privileges
- C. An account that requires two-factor authentication
- D. An account that validates against any user account on a FortiAuthenticator

Answer: A

Explanation:

<https://docs.fortinet.com/document/fortigate/6.2.0/cookbook/747268/configuring-wildcard-admin-accounts>

NEW QUESTION 40

What remote authentication servers can you configure to validate your FortiAnalyzer administrator logons? (Choose three)

- A. RADIUS
- B. Local
- C. LDAP
- D. PKI
- E. TACACS+

Answer: ACE

NEW QUESTION 44

What is the purpose of a dataset query in FortiAnalyzer?

- A. It sorts log data into tables
- B. It extracts the database schema
- C. It retrieves log data from the database
- D. It injects log data into the database

Answer: C

NEW QUESTION 47

How can you attach a report to an incident?

- A. By attaching it to an event handler alert
- B. By editing the settings of the desired report
- C. From the properties of an existing incident
- D. Saving it in JSON format, and then importing it

Answer: C

NEW QUESTION 52

Why run the command diagnose sql status sqlplugind?

- A. To list the current SQL processes running
- B. To check what is the database log insertion status
- C. To display the SOL query connections and hcache status
- D. To view the current hcache size

Answer: C

NEW QUESTION 56

What happens when the IOC breach detection engine on FortiAnalyzer finds web logs that match a blocklisted IP address?

- A. The endpoint is marked as Compromised and optionally, can be put in quarantine.
- B. FortiAnalyzer flags the associated host for further analysis.
- C. A new Infected entry is added for the corresponding endpoint.
- D. The detection engine classifies those logs as Suspicious

Answer: A

NEW QUESTION 59

What is the purpose of employing RAID with FortiAnalyzer?

- A. To introduce redundancy to your log data
- B. To provide data separation between ADOMs
- C. To separate analytical and archive data
- D. To back up your logs

Answer: A

Explanation:

[https://en.wikipedia.org/wiki/RAID#:~:text=RAID%20\(%22Redundant%20Array%20of%20Inexpensive,%2C%](https://en.wikipedia.org/wiki/RAID#:~:text=RAID%20(%22Redundant%20Array%20of%20Inexpensive,%2C%)

NEW QUESTION 64

What is the purpose of a predefined template on the FortiAnalyzer?

- A. It can be edited and modified as required
- B. It specifies the report layout which contains predefined texts, charts, and macros
- C. It specifies report settings which contains time period, device selection, and schedule
- D. It contains predefined data to generate mock reports

Answer: B

NEW QUESTION 65

How does FortiAnalyzer retrieve specific log data from the database?

- A. SQL FROM statement
- B. SQL GET statement
- C. SQL SELECT statement
- D. SQL EXTRACT statement

Answer: A

Explanation:

<https://fortinetweb.s3.amazonaws.com/docs.fortinet.com/v2/attachments/137bb60e-ff37-11e8-8524-f8bc1258b8>

NEW QUESTION 69

Which daemon is responsible for enforcing raw log file size?


- A. logfiled
- B. oftpd
- C. sqlplugind
- D. miglogd

Answer: A

NEW QUESTION 70

View the exhibit.

Insert Rate vs Receive Rate - Last 1 hour

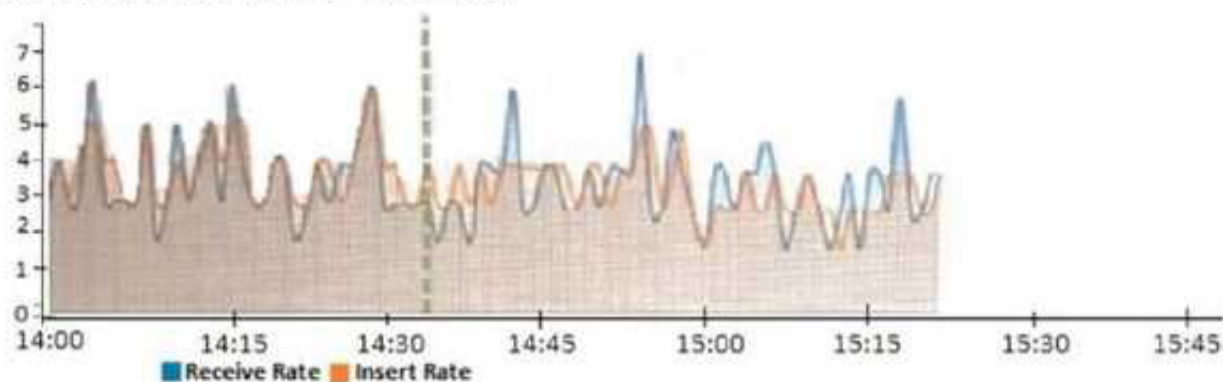

What does the data point at 14:35 tell you?

- A. FortiAnalyzer is dropping logs.
- B. FortiAnalyzer is indexing logs faster than logs are being received.
- C. FortiAnalyzer has temporarily stopped receiving logs so older logs' can be indexed.
- D. The sqlplugind daemon is ahead in indexing by one log.

Answer: B

Explanation:

<https://docs.fortinet.com/document/fortianalyzer/6.2.5/administration-guide/47690/insert-rate-vs-receive-rate-wi>

NEW QUESTION 74

A play book contains five tasks in total. An administrator executed the playbook and four out of five tasks finished successfully, but one task failed. What will be the status of the playbook after its execution?

- A. Success
- B. Failed
- C. Running
- D. Upstream_failed

Answer: B

Explanation:

Playbook jobs that include one or more failed tasks are labeled as Failed in Playbook Monitor. FortiAnalyzer_7.0_Study Guide page No: 247

Playbook jobs that include one or more failed tasks are labeled as Failed in Playbook Monitor. A failed status, however, does not mean that all tasks failed. Some individual actions may have been completed successfully.

NEW QUESTION 77

Which statement correctly describes the management extensions available on FortiAnalyzer?

- A. Management extensions do not require additional licenses.
- B. Management extensions allow FortiAnalyzer to act as a ForbSIEM supervisor.
- C. Management extensions require a dedicated VM for best performance.
- D. Management extensions may require a minimum number of CPU cores to run.

Answer: D

Explanation:

Events in FortiAnalyzer will be in one of four statuses. The current status will determine if more actions need to be taken by the security team or not.

The possible statuses are:

Unhandled: The security event risk is not mitigated or contained, so it is considered open. Contained: The risk source is isolated.

Mitigated: The security risk is mitigated by being blocked or dropped. (Blank): Other scenarios.

FortiAnalyzer_7.0_Study_Guide-Online pag. 189.

FortiAnalyzer_7.0_Study_Guide-Online.pdf page 189: Review the hardware requirements before you enable a management extension application. Some of them require a minimum amount of memory or a minimum number of CPU cores.

NEW QUESTION 79

Why should you use an NTP server on FortiAnalyzer and all registered devices that log into FortiAnalyzer?

- A. To properly correlate logs
- B. To use real-time forwarding
- C. To resolve host names
- D. To improve DNS response times

Answer: A

Explanation:

- Synchronize the time on FortiAnalyzer and all registered devices with an NTP server for proper log correlation

NEW QUESTION 81

Consider the CLI command:

```
# configure system global
  set log-checksum md5
end
```

What is the purpose of the command?

- A. To add a unique tag to each log to prove that it came from this FortiAnalyzer
- B. To add the MD5 hash value and authentication code
- C. To add a log file checksum
- D. To encrypt log communications

Answer: C

Explanation:

<https://docs.fortinet.com/document/fortianalyzer/6.2.5/cli-reference/849211/global>

NEW QUESTION 84

Refer to the exhibit.

The image displays the configuration of a FortiAnalyzer the administrator wants to join to an existing HA cluster. What can you conclude from the configuration displayed?

- A. This FortiAnalyzer will join to the existing HA cluster as the primary.
- B. This FortiAnalyzer is configured to receive logs in its port1.
- C. This FortiAnalyzer will trigger a failover after losing communication with its peers for 10 seconds.
- D. After joining to the cluster, this FortiAnalyzer will keep an updated log database.

Answer: B

Explanation:

"If the preferred role is Primary, then this unit becomes the primary unit if it is configured first in a new HA cluster. If there is an existing primary unit, then this unit becomes a secondary unit." (<https://docs.fortinet.com/document/fortianalyzer/7.0.5/administration-guide/275104>)

NEW QUESTION 85

Which two statements are true regarding fabric connectors? (Choose two.)

- A. Configuring fabric connectors to send notification to ITSM platform upon incident creation is more efficient than third-party information from the FortiAnalyzer API.
- B. Fabric connectors allow to save storage costs and improve redundancy.
- C. Storage connector service does not require a separate license to send logs to cloud platform.
- D. Cloud-Out connections allow you to send real-time logs to public cloud accounts like Amazon S3, Azure Blob , and Google Cloud.

Answer: AD

NEW QUESTION 90

Refer to the exhibit.

<pre>FortiAnalyzer1# get system status Platform Type : FAZVM64-KVM Platform Full Name : FortiAnalyzer-VM64-KVM Version : v7.2.1-build1215 220809 (GA) Serial Number : FAZ-VM0000065040 BIOS version : 04000002 Hostname : FortiAnalyzer1 Max Number of Admin Domains : 5 Admin Domain Configuration : Enabled FIPS Mode : Disabled HA Mode : Stand Alone Branch Point : 1215 Release Version Information : GA Time Zone : (GMT-8:00) Pacific Time (US & Canada) Disk Usage : Free 43.60GB, Total 58.80GB File System : Ext4 License Status : Valid FortiAnalyzer1# get system global adom-mode : normal adom-select : enable adom-status : enable console-output : standard country-flag : enable enc-algorithm : high ha-member-auto-grouping : enable hostname : FortiAnalyzer2 log-checksum : md5 log-forward-cache-size : 5 log-mode : analyzer longitude : (null) max-aggregation-tasks : 0 max-running-reports : 1 oftp-ssl-protocol : tlsv1.2 ssl-low-encryption : disable ssl-protocol : tlsv1.3 tlsv1.2 : 2000 : tlsv1.3 tlsv1.2</pre>	<pre>FortiAnalyzer3# get system status Platform Type : FAZVM64-KVM Platform Full Name : FortiAnalyzer-VM64-KVM Version : v7.2.1-build1215 220809 (GA) Serial Number : FAZ-VM0000065042 BIOS version : 04000002 Hostname : FortiAnalyzer3 Max Number of Admin Domains : 5 Admin Domain Configuration : Enabled FIPS Mode : Disabled HA Mode : Stand Alone Branch Point : 1215 Release Version Information : GA Time Zone : (GMT-8:00) Pacific Time (US & Canada) Disk Usage : Free 12.98GB, Total 79.80GB File System : Ext4 License Status : Valid FortiAnalyzer3# get system global adom-mode : normal adom-select : enable adom-status : enable console-output : standard country-flag : enable enc-algorithm : high ha-member-auto-grouping : enable hostname : FortiAnalyzer3 log-checksum : md5 log-forward-cache-size : 5 log-mode : analyzer longitude : (null) max-aggregation-tasks : 0 max-running-reports : 5 oftp-ssl-protocol : tlsv1.2 ssl-low-encryption : disable ssl-protocol : tlsv1.3 tlsv1.2 task-list-size : 2000 webbservice-proto : tlsv1.3 tlsv1.2</pre>
--	--

Based on the partial outputs displayed, which devices can be members of a FortiAnalyzer Fabric?

- A. FortiAnalyzer1 and FortiAnalyzer3
- B. FortiAnalyzer1 and FortiAnalyzer2
- C. All devices listed can be members
- D. FortiAnalyzer2 and FortiAnalyzer3

Answer: C

NEW QUESTION 95

How do you restrict an administrator's access to a subset of your organization's ADOMs?

- A. Set the ADOM mode to Advanced
- B. Assign the ADOMs to the administrator's account
- C. Configure trusted hosts
- D. Assign the default Super_User administrator profile

Answer: B

Explanation:

<https://docs.fortinet.com/document/fortianalyzer/6.2.5/administration-guide/717578/assigning-administrators-to>

NEW QUESTION 100

Which two methods can you use to send event notifications when an event occurs that matches a configured event handler? (Choose two.)

- A. SMS
- B. Email
- C. SNMP
- D. IM

Answer: BC

NEW QUESTION 101

What statements are true regarding FortiAnalyzer 's treatment of high availability (HA) dusters? (Choose two)

- A. FortiAnalyzer distinguishes different devices by their serial number.
- B. FortiAnalyzer receives logs from d devices in a duster.
- C. FortiAnalyzer receives bgs only from the primary device in the cluster.
- D. FortiAnalyzer only needs to know (he serial number of the primary device in the cluster-it automatically discovers the other devices.

Answer: AB

NEW QUESTION 106

An administrator has moved FortiGate A from the root ADOM to ADOM1. However, the administrator is not able to generate reports for FortiGate A in ADOM1. What should the administrator do to solve this issue?

- A. Use the execute sql-local rebuild-db command to rebuild all ADOM databases.
- B. Use the execute sql-local rebuild-adom ADOM1 command to rebuild the ADOM database.
- C. Use the execute sql-report run ADOM1 command to run a report.
- D. Use the execute sql-local rebuild-adom root command to rebuild the ADOM database.

Answer: B

NEW QUESTION 108

An administrator has configured the following settings: config system fortiview settings
set resolve-ip enable end
What is the significance of executing this command?

- A. Use this command only if the source IP addresses are not resolved on FortiGate.
- B. It resolves the source and destination IP addresses to a hostname in FortiView on FortiAnalyzer.
- C. You must configure local DNS servers on FortiGate for this command to resolve IP addresses on Forti Analyzer.
- D. It resolves the destination IP address to a hostname in FortiView on FortiAnalyzer.

Answer: D

NEW QUESTION 111

Refer to the exhibit.

Event	Event Status	Event Type	Count	Severity
~151.101.54.62 (1)				
Insecure SSL Connection blocked from 10.0.3.20	Mitigated	⚙️ SSL	1	● Low

Which statement is correct regarding the event displayed?

- A. The security risk was blocked or dropped.
- B. The security event risk is considered open.
- C. An incident was created from this event.
- D. The risk source is isolated.

Answer: A

Explanation:

Events in FortiAnalyzer will be in one of four statuses. The current status will determine if more actions need to be taken by the security team or not.

The possible statuses are:

Unhandled: The security event risk is not mitigated or contained, so it is considered open. Contained: The risk source is isolated.

Mitigated: The security risk is mitigated by being blocked or dropped. (Blank): Other scenarios.

FortiAnalyzer_7.0_Study_Guide-Online pag. 206

NEW QUESTION 116

When you perform a system backup, what does the backup configuration contain? (Choose two.)

- A. Generated reports
- B. Device list
- C. Authorized devices logs
- D. System information

Answer: BD

Explanation:

https://help.fortinet.com/fa/cli-olh/5-6-5/Content/Document/1400_execute/backup.htm

NEW QUESTION 119

Which statements are correct regarding FortiAnalyzer reports? (Choose two)

- A. FortiAnalyzer provides the ability to create custom reports.
- B. FortiAnalyzer glows you to schedule reports to run.
- C. FortiAnalyzer includes pre-defined reports only.
- D. FortiAnalyzer allows reporting for FortiGate devices only.

Answer: AB

NEW QUESTION 121

Which FortiAnalyzer feature allows you to retrieve the archived logs matching a specific timeframe from another FortiAnalyzer device?

- A. Log upload
- B. Indicators of Compromise
- C. Log forwarding an aggregation mode
- D. Log fetching

Answer: D

Explanation:

<https://docs.fortinet.com/document/fortianalyzer/6.2.0/administration-guide/651442/fetcher-management>

NEW QUESTION 122

An administrator has configured the following settings:

```
config system global
set log-checksum md5-auth
end
```

What is the significance of executing this command?

- A. This command records the log file MD5 hash value.
- B. This command records passwords in log files and encrypts them.
- C. This command encrypts log transfer between FortiAnalyzer and other devices.
- D. This command records the log file MD5 hash value and authentication code.

Answer: D

NEW QUESTION 125

Refer to the exhibit.



What does the data point at 12:20 indicate?

- A. The performance of FortiAnalyzer is below the baseline.
- B. FortiAnalyzer is using its cache to avoid dropping logs.
- C. The log insert lag time is increasing.
- D. The sqlplugind service is caught up with new logs.

Answer: C

NEW QUESTION 126

Which two statements express the advantages of grouping similar reports? (Choose two.)

- A. Improve report completion time.
- B. Conserve disk space on FortiAnalyzer by grouping multiple similar reports.
- C. Reduce the number of hcache tables and improve auto-hcache completion time.
- D. Provides a better summary of reports.

Answer: AC

NEW QUESTION 127

FortiAnalyzer reports are dropping analytical data from 15 days ago, even though the data policy setting for analytics logs is 60 days.

What is the most likely problem?

- A. Quota enforcement is acting on analytical data before a report is complete
- B. Logs are rolling before the report is run
- C. CPU resources are too high
- D. Disk utilization for archive logs is set for 15 days

Answer: B

NEW QUESTION 128

Which log will generate an event with the status Contained?

- A. An IPS log with action=pass.
- B. A WebFilter log with action=dropped.
- C. An AV log with action=quarantine.
- D. An AppControl log with action=blocked.

Answer: C

NEW QUESTION 132

What is the purpose of the following CLI command?

```
# configure system global
  set log-checksum md5
end
```

- A. To add a log file checksum
- B. To add the MD's hash value and authentication code
- C. To add a unique tag to each log to prove that it came from this FortiAnalyzer
- D. To encrypt log communications

Answer: A

Explanation:

<https://docs2.fortinet.com/document/fortianalyzer/6.0.3/cli-reference/849211/global>

NEW QUESTION 134

Which FortiAnalyzer feature allows you to use a proactive approach when managing your network security?

- A. Incidents dashboards
- B. Threat hunting
- C. FortiView Monitor
- D. Outbreak alert services

Answer: B

Explanation:

FortiAnalyzer_7.0_Study_Guide-Online.pdf page 217: Threat hunting consists in proactively searching for suspicious or potentially risky network activity in your environment. The proactive approach will help administrator find any threats that might have eluded detection by the current security solutions or configurations.

NEW QUESTION 138

What is the purpose of output variables?

- A. To store playbook execution statistics
- B. To use the output of the previous task as the input of the current task
- C. To display details of the connectors used by a playbook
- D. To save all the task settings when a playbook is exported

Answer: B

Explanation:

FortiAnalyzer_7.0_Study_Guide-Online.pdf page 242: Output variables allow you to use the output from a preceding task as an input to the current task.
"Output variables allow you to use the output from a preceding task as an input to the current task." FortiAnalyzer_7.0_Study_Guide-Online page 242

NEW QUESTION 143

.....

Thank You for Trying Our Product

* 100% Pass or Money Back

All our products come with a 90-day Money Back Guarantee.

* One year free update

You can enjoy free update one year. 24x7 online support.

* Trusted by Millions

We currently serve more than 30,000,000 customers.

* Shop Securely

All transactions are protected by VeriSign!

100% Pass Your NSE5_FAZ-7.2 Exam with Our Prep Materials Via below:

https://www.certleader.com/NSE5_FAZ-7.2-dumps.html