

Exam Questions NSE4_FGT-7.2

Fortinet NSE 4 - FortiOS 7.2

https://www.2passeasy.com/dumps/NSE4_FGT-7.2/



NEW QUESTION 1

Which two protocols are used to enable administrator access of a FortiGate device? (Choose two.)

- A. FTM
- B. SSH
- C. HTTPS
- D. FortiTelemetry

Answer: BC

NEW QUESTION 2

Refer to the exhibit.

```
# diagnose test application ipsmonitor

1: Display IPS engine information
2: Toggle IPS engine enable/disable status
3: Display restart log
4: Clear restart log
5: Toggle bypass status
6: Submit attack characteristics now
10: IPS queue length
11: Clear IPS queue length
12: IPS L7 socket statistics
13: IPS session list
14: IPS NTurbo statistics
15: IPSA statistics
...
97: Start all IPS engines
98: Stop all IPS engines
99: Restart all IPS engines and monitor
```

Examine the intrusion prevention system (IPS) diagnostic command shown in the exhibit.

If option 5 is used with the IPS diagnostic command and the outcome is a decrease in the CPU usage, what is the correct conclusion?

- A. The IPS engine is unable to prevent an intrusion attack.
- B. The IPS engine is inspecting a high volume of traffic.
- C. The IPS engine will continue to run in a normal state.
- D. The IPS engine is blocking all traffic.

Answer: B

NEW QUESTION 3

Refer to the exhibits.

Exhibit A shows a network diagram. Exhibit B shows the firewall policy configuration and a VIP object configuration.

The WAN (port1) interface has the IP address 10.200.1.1/24.

The LAN (port3) interface has the IP address 10.0.1.254/24.

Exhibit A

Exhibit B

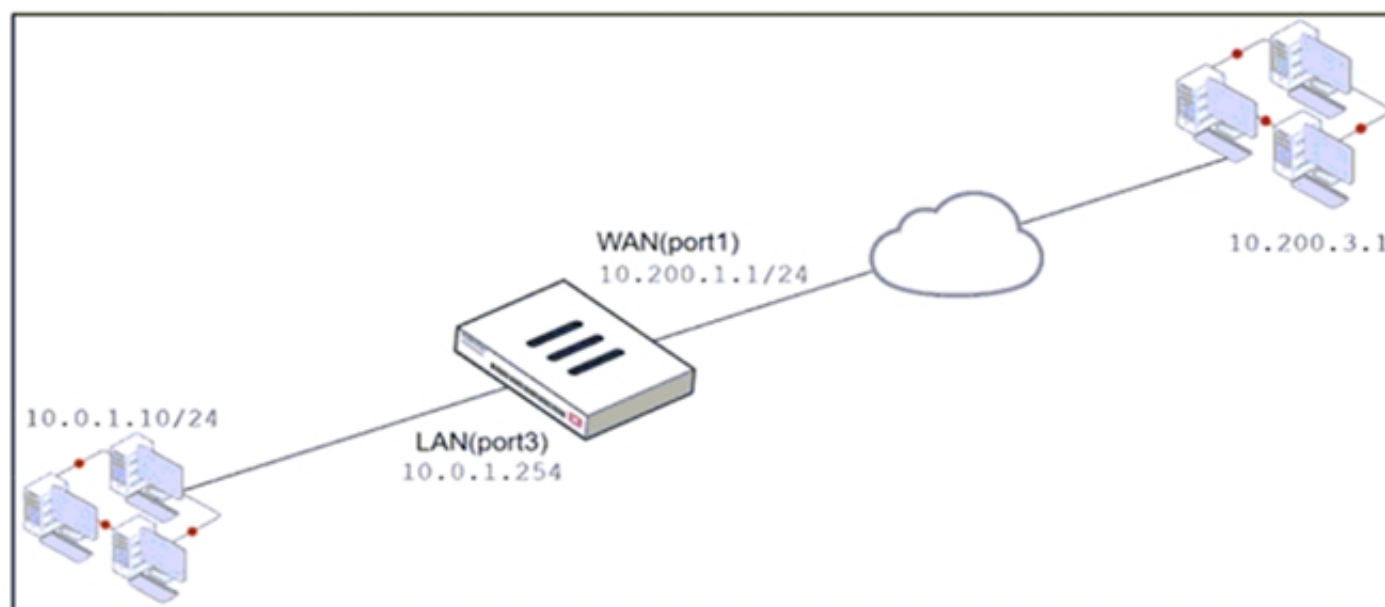


Exhibit A Exhibit B

| Name | From | To | Source | Destination | Schedule | Service | Action | NAT |
|-----------|-------------|-------------|--------|-------------|----------|---------|--------|---------|
| WebServer | WAN (port1) | LAN (port3) | all | VIP | always | ALL | ACCEPT | Enabled |

Edit Virtual IP

VIP type: IPv4

Name: VIP

Comments: Write a comment... 0/255

Color: Change

Network

Interface: WAN (port1)

Type: Static NAT

External IP address/range: 10.200.1.10

Map to

IPv4 address/range: 10.0.1.10

☐ Optional Filters

☒ Port Forwarding

Protocol: ☒ TCP ☐ UDP ☐ SCTP ☐ ICMP

Port Mapping Type: ☒ One to one ☐ Many to many

External service port: 10443

Map to IPv4 port: 443

If the host 10.200.3.1 sends a TCP SYN packet on port 10443 to 10.200.1.10, what will the source address, destination address, and destination port of the packet be, after FortiGate forwards the packet to the destination?

- A. 10.0.1.254, 10.0.1.10, and 443, respectively
- B. 10.0.1.254, 10.0.1.10, and 10443, respectively
- C. 10.200.3.1, 10.0.1.10, and 443, respectively

Answer: C

NEW QUESTION 4

Which two attributes are required on a certificate so it can be used as a CA certificate on SSL inspection? (Choose two.)

- A. The keyUsage extension must be set to keyCertSign.
- B. The CA extension must be set to TRUE.
- C. The issuer must be a public CA.
- D. The common name on the subject field must use a wildcard name.

Answer: AB

NEW QUESTION 5

Which statement is correct regarding the use of application control for inspecting web applications?

- A. Application control can identify child and parent applications, and perform different actions on them.
- B. Application control signatures are organized in a nonhierarchical structure.
- C. Application control does not require SSL inspection to identify web applications.
- D. Application control does not display a replacement message for a blocked web application.

Answer: A

NEW QUESTION 6

A network administrator is configuring a new IPsec VPN tunnel on FortiGate. The remote peer IP address is dynamic. In addition, the remote peer does not support a dynamic DNS update service.

Which type of remote gateway should the administrator configure on FortiGate for the new IPsec VPN tunnel to work?

- A. Pre-shared key
- B. Dialup user
- C. Dynamic DNS
- D. Static IP address

Answer: D

NEW QUESTION 7

Which timeout setting can be responsible for deleting SSL VPN associated sessions?

- A. SSL VPN idle-timeout
- B. SSL VPN http-request-body-timeout
- C. SSL VPN login-timeout
- D. SSL VPN dtls-hello-timeout

Answer: A

NEW QUESTION 8

What are two benefits of flow-based inspection compared to proxy-based inspection? (Choose two.)

- A. FortiGate uses fewer resources.
- B. FortiGate performs a more exhaustive inspection on traffic.
- C. FortiGate adds less latency to traffic.
- D. FortiGate allocates two sessions per connection.

Answer: AC

NEW QUESTION 9

A network administrator wants to set up redundant IPsec VPN tunnels on FortiGate by using two IPsec VPN tunnels and static routes. All traffic must be routed through the primary tunnel when both tunnels are up. The secondary tunnel must be used only if the primary tunnel goes down. In addition, FortiGate should be able to detect a dead tunnel to speed up tunnel failover. Which two key configuration changes must the administrator make on FortiGate to meet the requirements? (Choose two.)

- A. Configure a higher distance on the static route for the primary tunnel, and a lower distance on the static route for the secondary tunnel.
- B. Configure a lower distance on the static route for the primary tunnel, and a higher distance on the static route for the secondary tunnel.
- C. Enable Auto-negotiate and Autokey Keep Alive on the phase 2 configuration of both tunnels.
- D. Enable Dead Peer Detection.

Answer: AD

NEW QUESTION 10

Which statement correctly describes the use of reliable logging on FortiGate?

- A. Reliable logging is enabled by default in all configuration scenarios.
- B. Reliable logging is required to encrypt the transmission of logs.
- C. Reliable logging can be configured only using the CLI.
- D. Reliable logging prevents the loss of logs when the local disk is full.

Answer: D

NEW QUESTION 10

Refer to the exhibits.
Exhibit A shows system performance output. Exhibit B shows a FortiGate configured with the default configuration of high memory usage thresholds.

Exhibit A

```
# get system performance status
CPU states: 0% user 0% system 0% nice 100% idle 0% iowait 0% irq 0% softirq
CPU0 states: 0% user 0% system 0% nice 100% idle 0% iowait 0% irq 0% softirq
Memory: 2061108k total, 1854997k used (90%), 106111k free (5.1%), 100000k freeable (4.8%)
Average network usage: 83 / 0 kbps in 1 minute, 81 / 0 kbps in 10 minutes, 81 / 0 kbps in 30
minutes
Average sessions: 5 sessions in 1 minute, 3 sessions in 10 minutes, 3 sessions in 30 minutes
Average session setup rate: 0 sessions per second in last 1 minute, 0 sessions per second in last
10 minutes, 0 sessions per second in last 30 minutes
Virus caught: 0 total in 1 minute
IPS attacks blocked: 0 total in 1 minute
Uptime: 10 days, 3 hours, 28 minutes
```

Exhibit B

```
config system global
    set memory-use-threshold-red 88
    set memory-use-threshold-extreme 95
    set memory-use-threshold-green 82
end
```

Based on the system performance output, which two results are correct? (Choose two.)

- A. FortiGate will start sending all files to FortiSandbox for inspection.
- B. FortiGate has entered conserve mode.
- C. Administrators cannot change the configuration.
- D. Administrators can access FortiGate only through the console port.

Answer: BD

NEW QUESTION 13

Which two configuration settings are synchronized when FortiGate devices are in an active-active HA cluster? (Choose two.)

- A. FortiGuard web filter cache
- B. FortiGate hostname
- C. NTP
- D. DNS

Answer: CD

NEW QUESTION 15

Refer to the exhibits.

The exhibits show the firewall policies and the objects used in the firewall policies.

The administrator is using the Policy Lookup feature and has entered the search criteria shown in the exhibit.

Exhibit A

Exhibit B

Address Object

| Name | Details |
|-----------------|--------------|
| IP Range/Subnet | |
| LOCAL_CLIENT | 10.0.1.10/32 |
| all | 0.0.0.0 |
| FQDN | |
| facebook.com | facebook.com |

Internet Service Object

| Name | Direction | Number of Entries |
|------------------------------|-------------|-------------------|
| Predefined Internet Services | | |
| Facebook-Web | Destination | 26,578 |
| IP | Port | Protocol |
| 1.9.91.17 - 1.9.91.18 | 80 | TCP |
| | 443 | |
| | 8443 | |
| 1.9.91.17 - 1.9.91.18 | 443 | UDP |
| 1.9.91.30 | 443 | UDP |

Firewall Policies

| ID | From | To | Source | Destination | Schedule | Service | Action | NAT |
|----|-------|-------|--------------|--------------|----------|----------------------|----------|-----------|
| 3 | port3 | port1 | LOCAL_CLIENT | facebook.com | always | ULL_UDP | ✓ ACCEPT | ✓ Enabled |
| 1 | port1 | port3 | facebook.com | LOCAL_CLIENT | always | ULL_UDP | ✓ ACCEPT | ✓ Enabled |
| 4 | port4 | port1 | LOCAL_CLIENT | all | always | HTTP DNS HTTPS | ✓ ACCEPT | ✓ Enabled |
| 5 | port3 | port1 | LOCAL_CLIENT | Facebook-Web | always | Internet Service | ✓ ACCEPT | ✓ Enabled |
| 2 | port3 | port1 | all | all | always | ALL | ✓ ACCEPT | ✓ Enabled |

Exhibit A Exhibit B

Policy Lookup

| | |
|--------------------|--------------------|
| Incoming Interface | port3 |
| IP Version | IPv4 |
| Protocol | TCP |
| Source | 10.0.1.10 |
| Source Port | Optional (1-65535) |
| Destination | facebook.com |
| Destination Port | 443 |

Search Close

Which policy will be highlighted, based on the input criteria?

- A. Policy with ID 4.
- B. Policy with ID 5.
- C. Policies with ID 2 and 3.
- D. Policy with ID 4.

Answer: A

NEW QUESTION 18

Refer to the exhibit.

```
FGT1 # get router info routing-table database
Codes: K - kernel, C - connected, S - static, R - RIP, B - BGP
       O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
       > - selected route, * - FIB route, p - stale info

S      *> 0.0.0.0/0 [10/0] via 172.20.121.2, port1, [20/0]
S      *>          [10/0] via 10.0.0.2, port2, [30/0]
S      0.0.0.0/0 [20/0] via 192.168.15.2, port3, [10/0]
C      *> 10.0.0.0/24 is directly connected, port2
S      172.13.24.0/24 [10.0] is directly connected, port4
C      *> 172.20.121.0/24 is directly connected, port1
S      *> 192.167.1.0/24 [10/0] via 10.0.0.2, port2
C      *> 192.168.15.0/24 is directly connected, port3
```

Given the routing database shown in the exhibit, which two statements are correct? (Choose two.)

- A. The port3 default route has the highest distance.
- B. The port3 default route has the lowest metric.
- C. There will be eight routes active in the routing table.
- D. The port1 and port2 default routes are active in the routing table.

Answer: AD

NEW QUESTION 22

Which of the following statements is true regarding SSL VPN settings for an SSL VPN portal?

- A. By default, FortiGate uses WINS servers to resolve names.
- B. By default, the SSL VPN portal requires the installation of a client's certificate.
- C. By default, split tunneling is enabled.
- D. By default, the admin GUI and SSL VPN portal use the same HTTPS port.

Answer: D

NEW QUESTION 26

Which statement correctly describes NetAPI polling mode for the FSSO collector agent?

- A. The collector agent uses a Windows API to query DCs for user logins.
- B. NetAPI polling can increase bandwidth usage in large networks.

- C. The collector agent must search security event logs.
- D. The NetSession Enum function is used to track user logouts.

Answer: D

Explanation:

FortiGate_Infrastructure_7.0 page 270: "NetAPI: polls temporary sessions created on the DC when a user logs in or logs out and calls the NetSessionEnum function in Windows."

NEW QUESTION 30

Examine this PAC file configuration.

Which of the following statements are true? (Choose two.)

- A. Browsers can be configured to retrieve this PAC file from the FortiGate.
- B. Any web request to the 172.25. 120.0/24 subnet is allowed to bypass the proxy.
- C. All requests not made to Fortinet.com or the 172.25. 120.0/24 subnet, have to go through altproxy.corp.com: 8060.
- D. Any web request fortinet.com is allowed to bypass the proxy.

Answer: AD

NEW QUESTION 34

In consolidated firewall policies, IPv4 and IPv6 policies are combined in a single consolidated policy. Instead of separate policies. Which three statements are true about consolidated IPv4 and IPv6 policy configuration? (Choose three.)

- A. The IP version of the sources and destinations in a firewall policy must be different.
- B. The Incoming Interfac
- C. Outgoing Interfac
- D. Schedule, and Service fields can be shared with both IPv4 and IPv6.
- E. The policy table in the GUI can be filtered to display policies with IPv4, IPv6 or IPv4 and IPv6 sources and destinations.
- F. The IP version of the sources and destinations in a policy must match.
- G. The policy table in the GUI will be consolidated to display policies with IPv4 and IPv6 sources and destinations.

Answer: BDE

NEW QUESTION 38

Which three security features require the intrusion prevention system (IPS) engine to function? (Choose three.)

- A. Web filter in flow-based inspection
- B. Antivirus in flow-based inspection
- C. DNS filter
- D. Web application firewall
- E. Application control

Answer: ABE

Explanation:

<https://docs.fortinet.com/document/fortigate/7.0.0/new-features/739623/dns-filter-handled-by-ips-engine-in-flow>

NEW QUESTION 40

Which three criteria can a FortiGate use to look for a matching firewall policy to process traffic? (Choose three.)

- A. Source defined as Internet Services in the firewall policy.
- B. Destination defined as Internet Services in the firewall policy.
- C. Highest to lowest priority defined in the firewall policy.
- D. Services defined in the firewall policy.
- E. Lowest to highest policy ID number.

Answer: ABD

Explanation:

When a packet arrives, how does FortiGate find a matching policy? Each policy has match criteria, which you can define using the following objects:

- Incoming Interface
- Outgoing Interface
- Source: IP address, user, internet services
- Destination: IP address or internet services
- Service: IP protocol and port number
- Schedule: Applies during configured times

NEW QUESTION 42

Which two statements explain antivirus scanning modes? (Choose two.)

- A. In proxy-based inspection mode, files bigger than the buffer size are scanned.
- B. In flow-based inspection mode, FortiGate buffers the file, but also simultaneously transmits it to the client.
- C. In proxy-based inspection mode, antivirus scanning buffers the whole file for scanning, before sending it to the client.
- D. In flow-based inspection mode, files bigger than the buffer size are scanned.

Answer: BC

Explanation:

An antivirus profile in full scan mode buffers up to your specified file size limit. The default is 10 MB. That is large enough for most files, except video files. If your FortiGate model has more RAM, you may be able to increase this threshold. Without a limit, very large files could exhaust the scan memory. So, this threshold balances risk and performance. Is this tradeoff unique to FortiGate, or to a specific model? No. Regardless of vendor or model, you must make a choice. This is because of the difference between scans in theory, that have no limits, and scans on real-world devices, that have finite RAM. In order to detect 100% of malware regardless of file size, a firewall would need infinitely large RAM--something that no device has in the real world. Most viruses are very small. This table shows a typical tradeoff. You can see that with the default 10 MB threshold, only 0.01% of viruses pass through.

NEW QUESTION 46

Which three authentication timeout types are availability for selection on FortiGate? (Choose three.)

- A. hard-timeout
- B. auth-on-demand
- C. soft-timeout
- D. new-session
- E. Idle-timeout

Answer: ADE

Explanation:

<https://kb.fortinet.com/kb/documentLink.do?externalID=FD37221>

NEW QUESTION 47

Refer to the exhibits to view the firewall policy (Exhibit A) and the antivirus profile (Exhibit B).

The screenshot shows the 'Edit Policy' configuration interface. The 'Inspection Mode' is set to 'Flow-based'. Under the 'Firewall / Network Options' section, 'NAT' is enabled, 'IP Pool Configuration' is set to 'Use Outgoing Interface Address', 'Preserve Source Port' is disabled, and 'Protocol Options' is set to 'PRX default'. Under the 'Security Profiles' section, 'AntiVirus' is enabled and set to 'AV default', 'Web Filter' is disabled, 'DNS Filter' is disabled, 'Application Control' is disabled, 'IPS' is disabled, 'SSL Inspection' is enabled with a warning icon and set to 'SSL deep-inspection', and 'Decrypted Traffic Mirror' is disabled.

Edit AntiVirus Profile

Name

Comments
 29/255

Detect Viruses

Block Monitor

Feature set

Flow-based Proxy-based

Inspected Protocols

HTTP ☒

SMTP ☒

POP3 ☒

IMAP ☒

FTP ☒

CIFS ☐

APT Protection Options

Treat Windows Executables in Email Attachments as Viruses ☒

Include Mobile Malware Protection ☒

Virus Outbreak Prevention ⓘ

Use FortiGuard Outbreak Prevention Database ☐

Use External Malware Block List ⓘ ⚠ ☐

Which statement is correct if a user is unable to receive a block replacement message when downloading an infected file for the first time?

- A. The firewall policy performs the full content inspection on the file.
- B. The flow-based inspection is used, which resets the last packet to the user.
- C. The volume of traffic being inspected is too high for this model of FortiGate.
- D. The intrusion prevention security profile needs to be enabled when using flow-based inspection mode.

Answer: B

Explanation:

· "ONLY" If the virus is detected at the "START" of the connection, the IPS engine sends the block replacement message immediately

· When a virus is detected on a TCP session (FIRST TIME), but where "SOME PACKETS" have been already forwarded to the receiver, FortiGate "resets the connection" and does not send the last piece of the file. Although the receiver got most of the file content, the file has been truncated and therefore, can't be opened. The IPS engine also caches the URL of the infected file, so that if a "SECOND ATTEMPT" to transmit the file is made, the IPS engine will then send a block replacement message to the client instead of scanning the file again.

In flow mode, the FortiGate drops the last packet killing the file. But because of that the block replacement message cannot be displayed. If the file is attempted to download again the block message will be shown.

NEW QUESTION 48

An administrator is configuring an Ipsec between site A and siteB. The Remotes Gateway setting in both sites has been configured as Static IP Address. For site A, the local quick mode selector is 192.168. 1.0/24 and the remote quick mode selector is 192.168.2.0/24. Which subnet must the administrator configure for the local quick mode selector for site B?

- A. 192.168.3.0/24
- B. 192.168.2.0/24
- C. 192.168. 1.0/24
- D. 192.168.0.0/8

Answer: C

NEW QUESTION 51

You have enabled logging on your FortiGate device for Event logs and all Security logs, and you have set up logging to use the FortiGate local disk . What is the default behavior when the local disk is full?

- A. Logs are overwritten and the only warning is issued when log disk usage reaches the threshold of 95%.
- B. No new log is recorded until you manually clear logs from the local disk .
- C. Logs are overwritten and the first warning is issued when log disk usage reaches the threshold of 75%.
- D. No new log is recorded after the warning is issued when log disk usage reaches the threshold of 95%.

Answer: C

NEW QUESTION 52

Which statements about the firmware upgrade process on an active-active HA cluster are true? (Choose two.)

- A. The firmware image must be manually uploaded to each FortiGate.
- B. Only secondary FortiGate devices are rebooted.
- C. Uninterruptable upgrade is enabled by default.
- D. Traffic load balancing is temporally disabled while upgrading the firmware.

Answer: CD

NEW QUESTION 57

An administrator has configured outgoing Interface any in a firewall policy. Which statement is true about the policy list view?

- A. Policy lookup will be disabled.
- B. By Sequence view will be disabled.
- C. Search option will be disabled
- D. Interface Pair view will be disabled.

Answer: D

Explanation:

<https://kb.fortinet.com/kb/documentLink.do?externalID=FD47821>

NEW QUESTION 60

Which three options are the remote log storage options you can configure on FortiGate? (Choose three.)

- A. FortiCache
- B. FortiSIEM
- C. FortiAnalyzer
- D. FortiSandbox
- E. FortiCloud

Answer: BCE

NEW QUESTION 62

Refer to the exhibits.

Exhibit A.

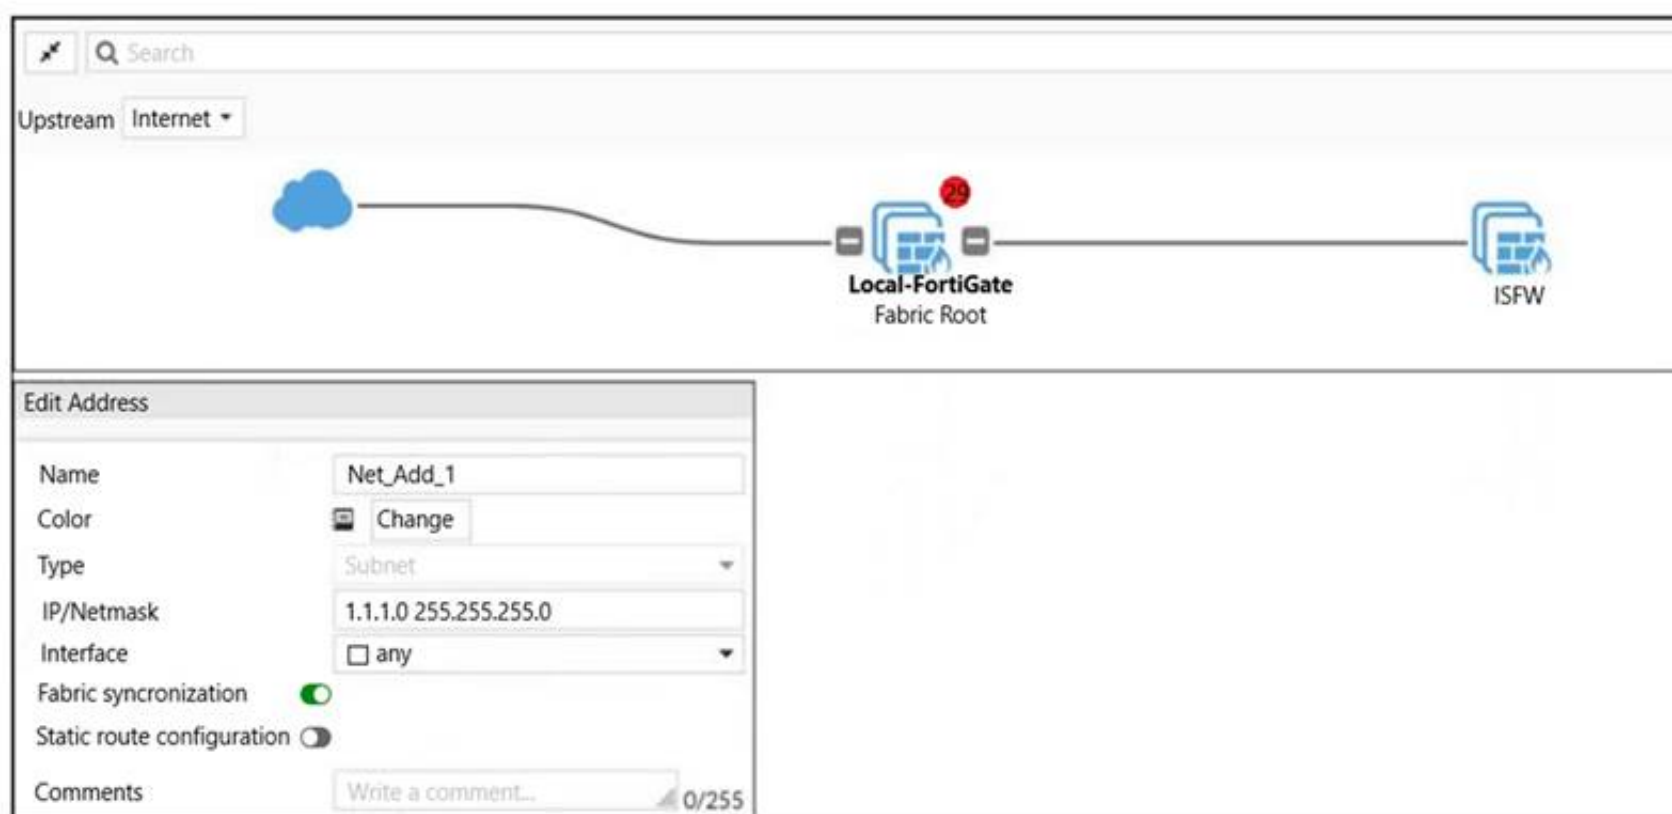


Exhibit B.

```
Local-FortiGate # show full-configuration system csf
config system csf
  set status enable
  set upstream-ip 0.0.0.0
  set upstream-port 8013
  set group-name "fortinet"
  set group-password ENC X18CtzrcUBUq9yz9nryP+YfM16
  BJKv7S/trtoh2gYAe5CH8YMAa0GT18aX+/dKH/o5izw1ZEoN1QN2N
  FGLT4r5z2AyYI8i1PxutiLcsCp1AdZadv1CxDe66IdLX7I6o22J9P
  set accept-auth-by-cert enable
  set log-unification enable
  set authorization-request-type serial
  set fabric-workers 2
  set downstream-access disable
  set configuration-sync default
  set fabric-object-unification local
  set saml-configuration-sync default
end
```

```
ISFW # show full-configuration system csf
config system csf
  set status enable
  set upstream-ip 10.0.1.254
  set upstream-port 8013
  set group-name ''
  set accept-auth-by-cert enable
  set log-unification enable
  set authorization-request-type serial
  set fabric-workers 2
  set downstream-access disable
  set configuration-sync default
  set saml-configuration-sync default
end

ISFW #
ISFW #
```


An administrator creates a new address object on the root FortiGate (Local-FortiGate) in the security fabric. After synchronization, this object is not available on the downstream FortiGate (ISFW).
What must the administrator do to synchronize the address object?

- A. Change the csf setting on Local-FortiGate (root) to set configuration-sync local.
- B. Change the csf setting on ISFW (downstream) to set configuration-sync local.
- C. Change the csf setting on Local-FortiGate (root) to set fabric-object-unification default.
- D. Change the csf setting on ISFW (downstream) to set fabric-object-unification default.

Answer: C

NEW QUESTION 63

Refer to exhibit.
An administrator configured the web filtering profile shown in the exhibit to block access to all social networking sites except Twitter. However, when users try to access twitter.com, they are redirected to a FortiGuard web filtering block page.

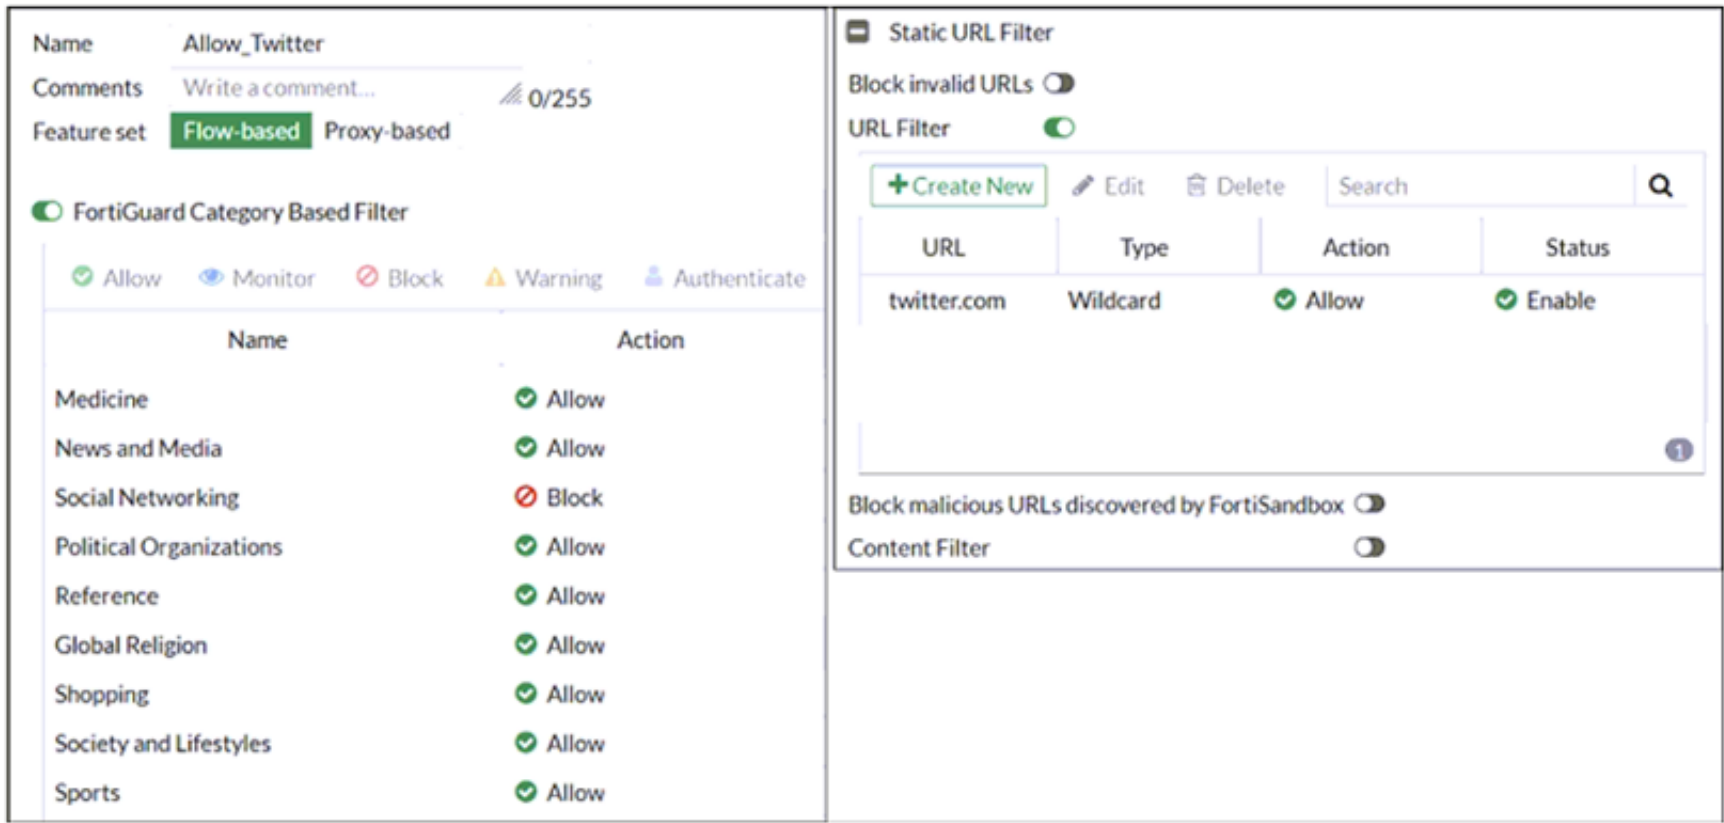


Based on the exhibit, which configuration change can the administrator make to allow Twitter while blocking all other social networking sites?

- A. On the FortiGuard Category Based Filter configuration, set Action to Warning for Social Networking
- B. On the Static URL Filter configuration, set Type to Simple
- C. On the Static URL Filter configuration, set Action to Exempt.
- D. On the Static URL Filter configuration, set Action to Monitor.

Answer: C

NEW QUESTION 66

A network administrator is troubleshooting an IPsec tunnel between two FortiGate devices. The administrator has determined that phase 1 fails to come up. The administrator has also re-entered the pre-shared key on both FortiGate devices to make sure they match.

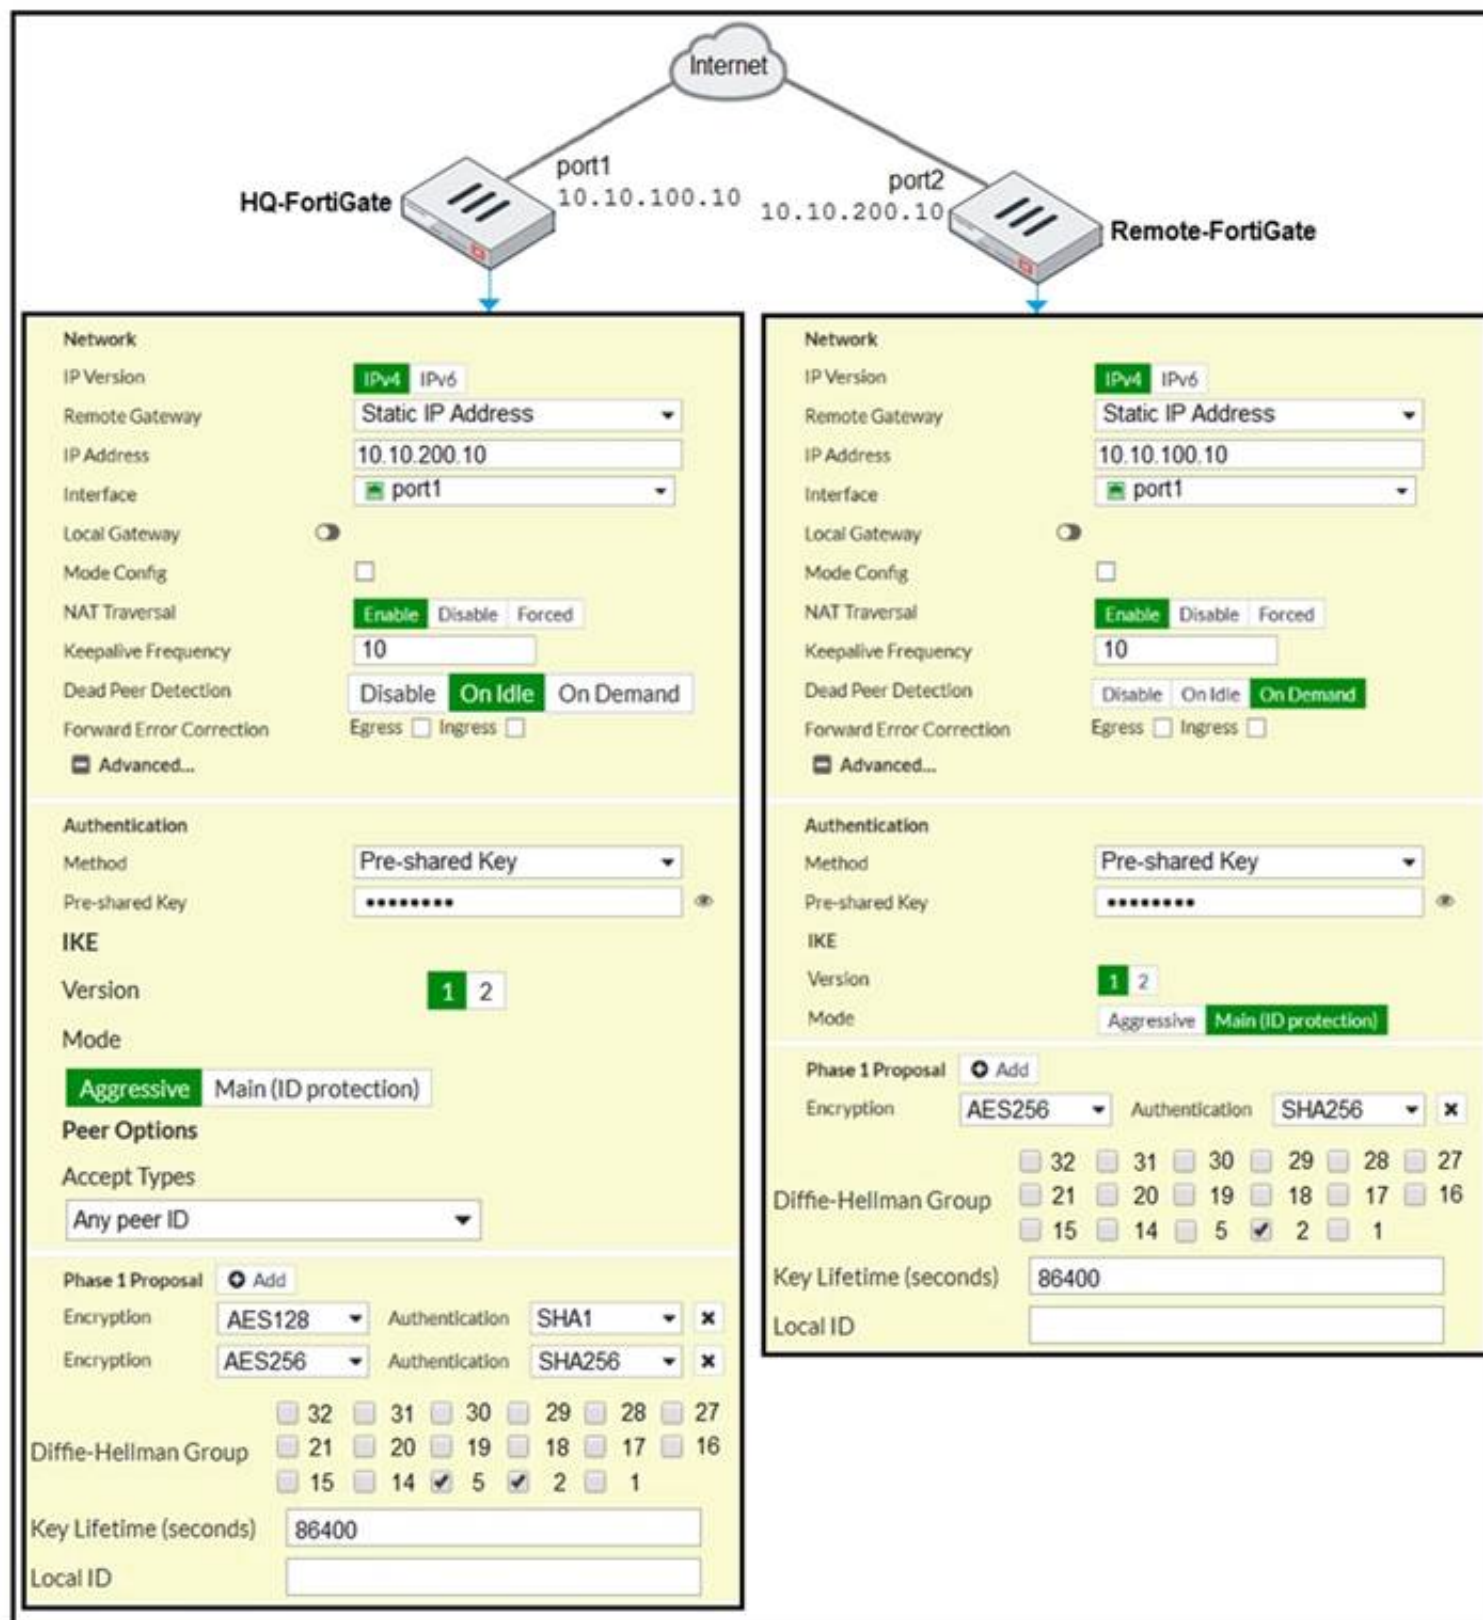

Based on the phase 1 configuration and the diagram shown in the exhibit, which two configuration changes will bring phase 1 up? (Choose two.)

- A. On HQ-FortiGate, set IKE mode to Main (ID protection).
- B. On both FortiGate devices, set Dead Peer Detection to On Demand.
- C. On HQ-FortiGate, disable Diffie-Helman group 2.
- D. On Remote-FortiGate, set port2 as Interface.

Answer: AD

NEW QUESTION 71

.....

THANKS FOR TRYING THE DEMO OF OUR PRODUCT

Visit Our Site to Purchase the Full Set of Actual NSE4_FGT-7.2 Exam Questions With Answers.

We Also Provide Practice Exam Software That Simulates Real Exam Environment And Has Many Self-Assessment Features. Order the NSE4_FGT-7.2 Product From:

https://www.2passeasy.com/dumps/NSE4_FGT-7.2/

Money Back Guarantee

NSE4_FGT-7.2 Practice Exam Features:

- * NSE4_FGT-7.2 Questions and Answers Updated Frequently
- * NSE4_FGT-7.2 Practice Questions Verified by Expert Senior Certified Staff
- * NSE4_FGT-7.2 Most Realistic Questions that Guarantee you a Pass on Your FirstTry
- * NSE4_FGT-7.2 Practice Test Questions in Multiple Choice Formats and Updatesfor 1 Year