

EC-Council

Exam Questions 312-50v11

Certified Ethical Hacker Exam (CEH v11)



NEW QUESTION 1

Gregory, a professional penetration tester working at Sys Security Ltd., is tasked with performing a security test of web applications used in the company. For this purpose, Gregory uses a tool to test for any security loopholes by hijacking a session between a client and server. This tool has a feature of intercepting proxy that can be used to inspect and modify the traffic between the browser and target application. This tool can also perform customized attacks and can be used to test the randomness of session tokens. Which of the following tools is used by Gregory in the above scenario?

- A. Nmap
- B. Burp Suite
- C. CxSAST
- D. Wireshark

Answer: B

NEW QUESTION 2

jane, an ethical hacker. Is testing a target organization's web server and website to identify security loopholes. In this process, she copied the entire website and its content on a local drive to view the complete profile of the site's directory structure, file structure, external links, images, web pages, and so on. This information helps jane map the website's directories and gain valuable information. What is the attack technique employed by Jane in the above scenario?

- A. website mirroring
- B. Session hijacking
- C. Web cache poisoning
- D. Website defacement

Answer: A

Explanation:

A mirror site may be a website or set of files on a computer server that has been copied to a different computer server in order that the location or files are available from quite one place. A mirror site has its own URL, but is otherwise just like the principal site. Load-balancing devices allow high-volume sites to scale easily, dividing the work between multiple mirror sites. A mirror site is typically updated frequently to make sure it reflects the contents of the first site. In some cases, the first site may arrange for a mirror site at a bigger location with a better speed connection and, perhaps, a better proximity to an outsized audience. If the first site generates an excessive amount of traffic, a mirror site can ensure better availability of the web site or files. For websites that provide copies or updates of widely used software, a mirror site allows the location to handle larger demands and enables the downloaded files to arrive more quickly. Microsoft, Sun Microsystems and other companies have mirror sites from which their browser software are often downloaded. Mirror sites are wont to make site access faster when the first site could also be geographically distant from those accessing it. A mirrored web server is usually located on a special continent from the principal site, allowing users on the brink of the mirror site to urge faster and more reliable access. Mirroring an internet site also can be done to make sure that information are often made available to places where access could also be unreliable or censored. In 2013, when Chinese authorities blocked access to foreign media outlets just like the Wall Street Journal and Reuters, site mirroring was wont to restore access and circumvent government censorship.

NEW QUESTION 3

When a normal TCP connection starts, a destination host receives a SYN (synchronize/start) packet from a source host and sends back a SYN/ACK (synchronize acknowledge). The destination host must then hear an ACK (acknowledge) of the SYN/ACK before the connection is established. This is referred to as the "TCP three-way handshake." While waiting for the ACK to the SYN ACK, a connection queue of finite size on the destination host keeps track of connections waiting to be completed. This queue typically empties quickly since the ACK is expected to arrive a few milliseconds after the SYN ACK.

How would an attacker exploit this design by launching TCP SYN attack?

- A. Attacker generates TCP SYN packets with random destination addresses towards a victim host
- B. Attacker floods TCP SYN packets with random source addresses towards a victim host
- C. Attacker generates TCP ACK packets with random source addresses towards a victim host
- D. Attacker generates TCP RST packets with random source addresses towards a victim host

Answer: B

NEW QUESTION 4

Josh has finished scanning a network and has discovered multiple vulnerable services. He knows that several of these usually have protections against external sources but are frequently susceptible to internal users. He decides to draft an email, spoof the sender as the internal IT team, and attach a malicious file disguised as a financial spreadsheet. Before Josh sends the email, he decides to investigate other methods of getting the file onto the system. For this particular attempt, what was the last stage of the cyber kill chain that Josh performed?

- A. Exploitation
- B. Weaponization
- C. Delivery
- D. Reconnaissance

Answer: B

NEW QUESTION 5

You start performing a penetration test against a specific website and have decided to start from grabbing all the links from the main page. What Is the best Linux pipe to achieve your milestone?

- A. `dirb https://site.com | grep "site"`
- B. `curl -s https://sile.com | grep "< a href='http" | grep "Site-com- | cut -d "V" -f 2`
- C. `wget https://stte.com | grep "< a href=*http" | grep "site.com"`
- D. `wgethttps://site.com | cut-d"http`

Answer: C

NEW QUESTION 6

What is the proper response for a NULL scan if the port is open?

- A. SYN
- B. ACK
- C. FIN
- D. PSH
- E. RST
- F. No response

Answer: F

NEW QUESTION 7

Which of the following Metasploit post-exploitation modules can be used to escalate privileges on Windows systems?

- A. getsystem
- B. getuid
- C. keylogrecorder
- D. autoroute

Answer: A

NEW QUESTION 8

Hackers often raise the trust level of a phishing message by modeling the email to look similar to the internal email used by the target company. This includes using logos, formatting, and names of the target company. The phishing message will often use the name of the company CEO, President, or Managers. The time a hacker spends performing research to locate this information about a company is known as?

- A. Exploration
- B. Investigation
- C. Reconnaissance
- D. Enumeration

Answer: C

NEW QUESTION 9

An incident investigator asks to receive a copy of the event logs from all firewalls, proxy servers, and Intrusion Detection Systems (IDS) on the network of an organization that has experienced a possible breach of security. When the investigator attempts to correlate the information in all of the logs, the sequence of many of the logged events do not match up. What is the most likely cause?

- A. The network devices are not all synchronized.
- B. Proper chain of custody was not observed while collecting the logs.
- C. The attacker altered or erased events from the logs.
- D. The security breach was a false positive.

Answer: A

NEW QUESTION 10

In Trojan terminology, what is a covert channel?



- A. A channel that transfers information within a computer system or network in a way that violates the security policy
- B. A legitimate communication path within a computer system or network for transfer of data
- C. It is a kernel operation that hides boot processes and services to mask detection
- D. It is Reverse tunneling technique that uses HTTPS protocol instead of HTTP protocol to establish connections

Answer: A

NEW QUESTION 10

John is investigating web-application firewall logs and observes that someone is attempting to inject the following:

```
char buff[10]; buff[>0] - 'a';
```


What type of attack is this?

- A. CSRF
- B. XSS
- C. Buffer overflow
- D. SQL injection

Answer: C

Explanation:

Buffer overflow this attack is an anomaly that happens when software writing data to a buffer overflows the buffer's capacity, leading to adjacent memory locations being overwritten. In other words, an excessive amount of information is being passed into a container that doesn't have enough space, which information finishes up replacing data in adjacent containers. Buffer overflows are often exploited by attackers with a goal of modifying a computer's memory so as to undermine or take hold of program execution.

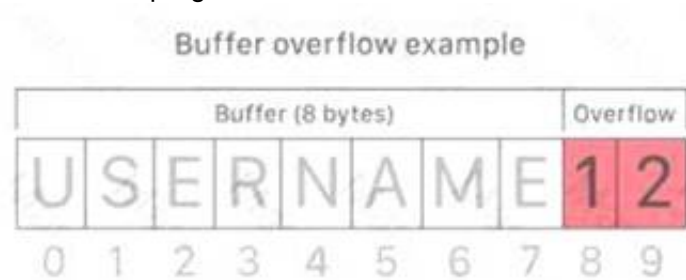

What's a buffer? A buffer, or data buffer, is a neighborhood of physical memory storage used to temporarily store data while it's being moved from one place to a different . These buffers typically sleep in RAM memory. Computers frequently use buffers to assist improve performance; latest hard drives cash in of buffering to efficiently access data, and lots of online services also use buffers. for instance , buffers are frequently utilized in online video streaming to stop interruption. When a video is streamed, the video player downloads and stores perhaps 20% of the video at a time during a buffer then streams from that buffer. This way, minor drops in connection speed or quick service disruptions won't affect the video stream performance. Buffers are designed to contain specific amounts of knowledge . Unless the program utilizing the buffer has built-in instructions to discard data when an excessive amount of is shipped to the buffer, the program will overwrite data in memory adjacent to the buffer. Buffer overflows are often exploited by attackers to corrupt software. Despite being well-understood, buffer overflow attacks are still a serious security problem that torment cyber-security teams. In 2014 a threat referred to as 'heartbleed' exposed many many users to attack due to a buffer overflow vulnerability in SSL software.

How do attackers exploit buffer overflows? An attacker can deliberately feed a carefully crafted input into a program which will cause the program to undertake and store that input during a buffer that isn't large enough, overwriting portions of memory connected to the buffer space. If the memory layout of the program is well-defined, the attacker can deliberately overwrite areas known to contain executable code. The attacker can then replace this code together with his own executable code, which may drastically change how the program is meant to figure .For example if the overwritten part in memory contains a pointer (an object that points to a different place in memory) the attacker's code could replace that code with another pointer that points to an exploit payload. this will transfer control of the entire program over to the attacker's code.

NEW QUESTION 14

Which of the following is the BEST way to defend against network sniffing?

- A. Using encryption protocols to secure network communications
- B. Register all machines MAC Address in a Centralized Database
- C. Use Static IP Address
- D. Restrict Physical Access to Server Rooms hosting Critical Servers

Answer: A

NEW QUESTION 16

You are a penetration tester tasked with testing the wireless network of your client Brakeme SA. You are attempting to break into the wireless network with the SSID "Brakeme-Internal." You realize that this network uses WPA3 encryption, which of the following vulnerabilities is the promising to exploit?

- A. Dragonblood
- B. Cross-site request forgery
- C. Key reinstallation attack
- D. AP Misconfiguration

Answer: A

Explanation:

Dragonblood allows an attacker in range of a password-protected Wi-Fi network to get the password and gain access to sensitive information like user credentials, emails and mastercard numbers. consistent with the published report: "The WPA3 certification aims to secure Wi-Fi networks, and provides several advantages over its predecessor WPA2, like protection against offline dictionary attacks and forward secrecy. Unfortunately, we show that WPA3 is suffering from several design flaws, and analyze these flaws both theoretically and practically. Most prominently, we show that WPA3's Simultaneous Authentication of Equals (SAE) handshake, commonly referred to as Dragonfly, is suffering from password partitioning attacks." Our Wi-Fi researchers at WatchGuard are educating businesses globally that WPA3 alone won't stop the Wi-Fi hacks that allow attackers to steal information over the air (learn more in our recent blog post on the topic). These Dragonblood vulnerabilities impact a little amount of devices that were released with WPA3 support, and makers are currently making patches available. one among the most important takeaways for businesses of all sizes is to know that a long-term fix might not be technically feasible for devices with lightweight processing capabilities like IoT and embedded systems. Businesses got to consider adding products that enable a Trusted Wireless Environment for all kinds of devices and users alike. Recognizing that vulnerabilities like KRACK and Dragonblood require attackers to initiate these attacks by bringing an "Evil Twin" Access Point or a Rogue Access Point into a Wi-Fi environment, we've been that specialize in developing Wi-Fi security solutions that neutralize these threats in order that these attacks can never occur. The Trusted Wireless Environment framework protects against the "Evil Twin" Access Point and Rogue Access Point. one among these hacks is required to initiate the 2 downgrade or side-channel attacks referenced in Dragonblood. What's next? WPA3 is an improvement over WPA2 Wi-Fi encryption protocol, however, as we predicted, it still doesn't provide protection from the six known Wi-Fi threat categories. It's highly likely that we'll see more WPA3 vulnerabilities announced within the near future. To help reduce Wi-Fi vulnerabilities, we're asking all of you to hitch the Trusted Wireless Environment movement and advocate for a worldwide security standard for Wi-Fi.

NEW QUESTION 21

Daniel is a professional hacker who is attempting to perform an SQL injection attack on a target website. www.movlescope.com. During this process, he encountered an IDS that detects SQL Injection attempts based on predefined signatures. To evade any comparison statement, he attempted placing characters such as "or '1'='1" In any SQL injection statement such as "or 1=1." Identify the evasion technique used by Daniel in the above scenario.

- A. Null byte
- B. IP fragmentation
- C. Char encoding
- D. Variation

Answer: D

Explanation:

One may append the comment “—” operator along with the String for the username and whole avoid executing the password segment of the SQL query.

Everything when the — operator would be considered as comment and not dead.

To launch such an attack, the value passed for name could be 'OR '1'='1' ; —Statement = “SELECT * FROM 'CustomerDB' WHERE 'name' = ' ”+ userName + “ ‘ AND 'password' = ‘ ” + passwd + “ ‘ ; ”

Statement = “SELECT * FROM 'CustomerDB' WHERE 'name' = ‘ ’ OR '1'='1';— + “ ‘ AND 'password' = ‘ ” + passwd + “ ‘ ; ”

All the records from the customer database would be listed.

Yet, another variation of the SQL Injection Attack can be conducted in dbms systems that allow multiple SQL injection statements. Here, we will also create use of the vulnerability in sure dbms whereby a user provided field isn't strongly used in or isn't checked for sort constraints.

This could take place once a numeric field is to be employed in a SQL statement; but, the programmer makes no checks to validate that the user supplied input is numeric.

Variation is an evasion technique whereby the attacker can easily evade any comparison statement. The attacker does this by placing characters such as "" or '1'=1"" in any basic injection statement such as “or 1=1” or with other accepted SQL comments.

Evasion Technique: Variation Variation is an evasion technique whereby the attacker can easily evade any comparison statement. The attacker does this by placing characters such as "" or '1'=1"" in any basic injection statement such as “or 1=1” or with other accepted SQL comments. The SQL interprets this as a comparison between two strings or characters instead of two numeric values. As the evaluation of two strings yields a true statement, similarly, the evaluation of two numeric values yields a true statement, thus rendering the evaluation of the complete query unaffected. It is also possible to write many other signatures; thus, there are infinite possibilities of variation as well. The main aim of the attacker is to have a WHERE statement that is always evaluated as “true” so that any mathematical or string comparison can be used, where the SQL can perform the same.

NEW QUESTION 24

Email is transmitted across the Internet using the Simple Mail Transport Protocol. SMTP does not encrypt email, leaving the information in the message vulnerable to being read by an unauthorized person. SMTP can upgrade a connection between two mail servers to use TLS. Email transmitted by SMTP over TLS is encrypted. What is the name of the command used by SMTP to transmit email over TLS?

- A. OPPORTUNISTICTLS
- B. UPGRADETLS
- C. FORCETLS
- D. STARTTLS

Answer: D

NEW QUESTION 25

The Payment Card Industry Data Security Standard (PCI DSS) contains six different categories of control objectives. Each objective contains one or more requirements, which must be followed in order to achieve compliance. Which of the following requirements would best fit under the objective, "Implement strong access control measures"?

- A. Regularly test security systems and processes.
- B. Encrypt transmission of cardholder data across open, public networks.
- C. Assign a unique ID to each person with computer access.
- D. Use and regularly update anti-virus software on all systems commonly affected by malware.

Answer: C

NEW QUESTION 30

A hacker has successfully infected an internet-facing server which he will then use to send junk mail, take part in coordinated attacks, or host junk email content. Which sort of trojan infects this server?

- A. Botnet Trojan
- B. Banking Trojans
- C. Turtle Trojans
- D. Ransomware Trojans

Answer: A

NEW QUESTION 34

A technician is resolving an issue where a computer is unable to connect to the Internet using a wireless access point. The computer is able to transfer files locally to other machines, but cannot successfully reach the Internet. When the technician examines the IP address and default gateway they are both on the 192.168.1.0/24. Which of the following has occurred?

- A. The computer is not using a private IP address.
- B. The gateway is not routing to a public IP address.
- C. The gateway and the computer are not on the same network.
- D. The computer is using an invalid IP address.

Answer: B

NEW QUESTION 38

Internet Protocol Security IPsec is actually a suite pf protocols. Each protocol within the suite provides different functionality. Collective IPsec does everything except.

- A. Protect the payload and the headers
- B. Encrypt
- C. Work at the Data Link Layer
- D. Authenticate

Answer: C

Explanation:

<https://en.wikipedia.org/wiki/IPsec> Usage of IPsec Authentication Header format in Tunnel and Transpor modes

NEW QUESTION 40

John the Ripper is a technical assessment tool used to test the weakness of which of the following?

- A. Passwords
- B. File permissions
- C. Firewall rulesets
- D. Usernames

Answer: A

NEW QUESTION 42

An attacker has installed a RAT on a host. The attacker wants to ensure that when a user attempts to go to "www.MyPersonalBank.com", the user is directed to a phishing site.

Which file does the attacker need to modify?

- A. Boot.ini
- B. Sudoers
- C. Networks
- D. Hosts

Answer: D

NEW QUESTION 46

How does a denial-of-service attack work?

- A. A hacker prevents a legitimate user (or group of users) from accessing a service
- B. A hacker uses every character, word, or letter he or she can think of to defeat authentication
- C. A hacker tries to decipher a password by using a system, which subsequently crashes the network
- D. A hacker attempts to imitate a legitimate user by confusing a computer or even another person

Answer: A

NEW QUESTION 48

This type of injection attack does not show any error message. It is difficult to exploit as it returns information when the application is given SQL payloads that elicit a true or false response from the server. By observing the response, an attacker can extract sensitive information. What type of attack is this?

- A. Time-based SQL injection
- B. Union SQL injection
- C. Error-based SQL injection
- D. Blind SQL injection

Answer: D

NEW QUESTION 53

Which rootkit is characterized by its function of adding code and/or replacing some of the operating-system kernel code to obscure a backdoor on a system?

- A. User-mode rootkit
- B. Library-level rootkit
- C. Kernel-level rootkit
- D. Hypervisor-level rootkit

Answer: C

NEW QUESTION 56

The network team has well-established procedures to follow for creating new rules on the firewall. This includes having approval from a manager prior to implementing any new rules. While reviewing the firewall configuration, you notice a recently implemented rule but cannot locate manager approval for it. What would be a good step to have in the procedures for a situation like this?

- A. Have the network team document the reason why the rule was implemented without prior manager approval.
- B. Monitor all traffic using the firewall rule until a manager can approve it.
- C. Do not roll back the firewall rule as the business may be relying upon it, but try to get manager approval as soon as possible.
- D. Immediately roll back the firewall rule until a manager can approve it

Answer: D

NEW QUESTION 60

While performing an Nmap scan against a host, Paola determines the existence of a firewall. In an attempt to determine whether the firewall is stateful or stateless, which of the following options would be best to use?

- A. -sA
- B. -sX
- C. -sT

D. -sF

Answer: A

NEW QUESTION 61

Bobby, an attacker, targeted a user and decided to hijack and intercept all their wireless communications. He installed a fake communication tower between two authentic endpoints to mislead the victim. Bobby used this virtual tower to interrupt the data transmission between the user and real tower, attempting to hijack an active session, upon receiving the users request. Bobby manipulated the traffic with the virtual tower and redirected the victim to a malicious website. What is the attack performed by Bobby in the above scenario?

- A. Wardriving
- B. KRACK attack
- C. jamming signal attack
- D. aLTEr attack

Answer: D

Explanation:

aLTEr attacks are usually performed on LTE devices Attacker installs a virtual (fake) communication tower between two authentic endpoints intending to mislead the victim This virtual tower is used to interrupt the data transmission between the user and real tower attempting to hijack the active session.

NEW QUESTION 66

You have retrieved the raw hash values from a Windows 2000 Domain Controller. Using social engineering, you come to know that they are enforcing strong passwords. You understand that all users are required to use passwords that are at least 8 characters in length. All passwords must also use 3 of the 4 following categories: lower case letters, capital letters, numbers and special characters. With your existing knowledge of users, likely user account names and the possibility that they will choose the easiest passwords possible, what would be the fastest type of password cracking attack you can run against these hash values and still get results?

- A. Online Attack
- B. Dictionary Attack
- C. Brute Force Attack
- D. Hybrid Attack

Answer: D

NEW QUESTION 71

As a Certified Ethical Hacker, you were contracted by a private firm to conduct an external security assessment through penetration testing. What document describes the specifics of the testing, the associated violations, and essentially protects both the organization's interest and your liabilities as a tester?

- A. Service Level Agreement
- B. Project Scope
- C. Rules of Engagement
- D. Non-Disclosure Agreement

Answer: C

NEW QUESTION 75

You are attempting to run an Nmap port scan on a web server. Which of the following commands would result in a scan of common ports with the least amount of noise in order to evade IDS?

- A. nmap -A - Pn
- B. nmap -sP -p-65535 -T5
- C. nmap -sT -O -T0
- D. nmap -A --host-timeout 99 -T1

Answer: C

NEW QUESTION 79

Robin, a professional hacker, targeted an organization's network to sniff all the traffic. During this process. Robin plugged in a rogue switch to an unused port in the LAN with a priority lower than any other switch in the network so that he could make it a root bridge that will later allow him to sniff all the traffic in the network. What is the attack performed by Robin in the above scenario?

- A. ARP spoofing attack
- B. VLAN hopping attack
- C. DNS poisoning attack
- D. STP attack

Answer: D


Explanation:

STP prevents bridging loops in a redundant switched network environment. By avoiding loops, you can ensure that broadcast traffic does not become a traffic storm.

STP is a hierarchical tree-like topology with a "root" switch at the top. A switch is elected as root based on the lowest configured priority of any switch (0 through 65,535). When a switch boots up, it begins a process of identifying other switches and determining the root bridge. After a root bridge is elected, the topology is established from its perspective of the connectivity. The switches determine the path to the root bridge, and all redundant paths are blocked. STP sends configuration and topology change notifications and acknowledgments (TCN/TCA) using bridge protocol data units (BPDU).

An STP attack involves an attacker spoofing the root bridge in the topology. The attacker broadcasts out an STP configuration/topology change BPDU in an

attempt to force an STP recalculation. The BPDU sent out announces that the attacker's system has a lower bridge priority. The attacker can then see a variety of frames forwarded from other switches to it. STP recalculation may also cause a denial-of-service (DoS) condition on the network by causing an interruption of 30 to 45 seconds each time the root bridge changes. An attacker using STP network topology changes to force its host to be elected as the root bridge.

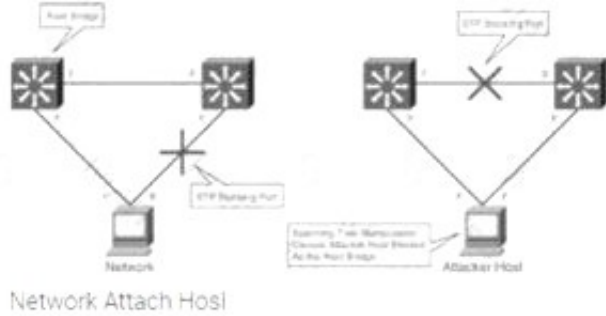

switch

NEW QUESTION 82

Which of the following Bluetooth hacking techniques does an attacker use to send messages to users without the recipient's consent, similar to email spamming?

- A. Bluesmacking
- B. BlueSniffing
- C. Bluejacking
- D. Bluesnarfing

Answer: C

NEW QUESTION 87

The network users are complaining because their system are slowing down. Further, every time they attempt to go a website, they receive a series of pop-ups with advertisements. What types of malware have the system been infected with?

- A. Virus
- B. Spyware
- C. Trojan
- D. Adware

Answer: D

Explanation:

Adware, or advertising supported computer code, is computer code that displays unwanted advertisements on your pc. Adware programs can tend to serve you pop-up ads, will modification your browser's homepage, add spyware and simply bombard your device with advertisements. Adware may be a additional summary name for doubtless unwanted programs. It's roughly a virulent disease and it's going to not be as clearly malicious as a great deal of different problematic code floating around on the net. create no mistake concerning it, though, that adware has to return off of no matter machine it's on. Not solely will adware be extremely annoying whenever you utilize your machine, it might additionally cause semipermanent problems for your device.

Adware a network users the browser to gather your internet browsing history so as to 'target' advertisements that appear tailored to your interests. At their most innocuous, adware infections square measure simply annoying. as an example, adware barrages you with pop-up ads that may create your net expertise markedly slower and additional labor intensive.

NEW QUESTION 88

Which of the following is a command line packet analyzer similar to GUI-based Wireshark?

- A. nessus
- B. tcpdump
- C. ethereal
- D. jack the ripper

Answer: B

NEW QUESTION 92

Mason, a professional hacker, targets an organization and spreads Emotet malware through malicious script. After infecting the victim's device. Mason further used Emotet to spread the infection across local networks and beyond to compromise as many machines as possible. In this process, he used a tool, which is a self-extracting RAR file, to retrieve information related to network resources such as writable share drives.

What is the tool employed by Mason in the above scenario?

- A. NetPass.exe
- B. Outlook scraper
- C. WebBrowserPassView
- D. Credential enumerator

Answer: D

NEW QUESTION 93

As a securing consultant, what are some of the things you would recommend to a company to ensure DNS security?

- A. Use the same machines for DNS and other applications
- B. Harden DNS servers
- C. Use split-horizon operation for DNS servers
- D. Restrict Zone transfers
- E. Have subnet diversity between DNS servers

Answer: BCDE

NEW QUESTION 98

Which of the following tools are used for enumeration? (Choose three.)

- A. SolarWinds
- B. USER2SID
- C. Cheops
- D. SID2USER
- E. DumpSec

Answer: BDE

NEW QUESTION 99

Study the snort rule given below:

```
alert tcp $EXTERNAL_NET any -> $HOME_NET 135
(msg: "NETBIOS DCERPC ISystemActivator bind attempt";
flow:to_server, established; content: "|05|"; distance: 0; within: 1;
content: "|0b|"; distance: 1; within: 1; byte_test: 1, &, 1, 0, relative;
content: "|A0 01 00 00 00 00 00 00 C0 00 00 00 00 00 00 46|";
distance: 29; within: 16; reference: cve, CAN-2003-0352;
classtype: attempted-admin; sid: 2192; rev: 1;)
```

```
alert tcp $EXTERNAL_NET any -> $HOME_NET 445 (msg: "NETBIOS SMB
DCERPC ISystemActivator bind attempt"; flow: to_server, established;
content: "|FF|SMB|25|"; nocase; offset:4, depth:5; content: "|26 00|";
nocase; distance:5; within: 12; content: "|05|"; distance:0; within:1;
content: "|0b|"; distance: 1; within: 1; byte_test: 1, &, 1, 0, relative;
content: "|A0 01 00 00 00 00 00 00 C0 00 00 00 00 00 00 46|";
distance: 29; within: 16; reference: cve, CAN-2003-0352;
classtype: attempted-admin; sid: 2193; rev: 1;)
```

From the options below, choose the exploit against which this rule applies.

- A. WebDav
- B. SQL Slammer
- C. MS Blaster
- D. MyDoom

Answer: C

NEW QUESTION 100

What is the minimum number of network connections in a multihomed firewall?

- A. 3
- B. 5
- C. 4
- D. 2

Answer: A

NEW QUESTION 104

You are the Network Admin, and you get a complaint that some of the websites are no longer accessible. You try to ping the servers and find them to be reachable. Then you type the IP address and then you try on the browser, and find it to be accessible. But they are not accessible when you try using the URL. What may be the problem?

- A. Traffic is Blocked on UDP Port 53
- B. Traffic is Blocked on TCP Port 80
- C. Traffic is Blocked on TCP Port 54
- D. Traffic is Blocked on UDP Port 80

Answer: A

NEW QUESTION 106

Heather's company has decided to use a new customer relationship management tool. After performing the appropriate research, they decided to purchase a subscription to a cloud-hosted solution. The only administrative task that Heather will need to perform is the management of user accounts. The provider will take care of the hardware, operating system, and software administration including patching and monitoring. Which of the following is this type of solution?

- A. SaaS
- B. IaaS
- C. CaaS
- D. PaaS

Answer: A

Explanation:

Software as a service (SaaS) allows users to attach to and use cloud-based apps over the web. Common examples are email, calendaring and workplace tool (such as Microsoft workplace 365).

SaaS provides a whole software solution that you get on a pay-as-you-go basis from a cloud service provider. You rent the use of an app for your organisation and

your users connect with it over the web, typically with an internet browser. All of the underlying infrastructure, middleware, app software system and app knowledge are located within the service provider's knowledge center. The service provider manages the hardware and software system and with the appropriate service agreement, can make sure the availability and also the security of the app and your data as well. SaaS allows your organisation to induce quickly up and running with an app at token upfront cost.

Common SaaS scenarios This tool having used a web-based email service like Outlook, Hotmail or Yahoo! Mail, then you have got already used a form of SaaS. With these services, you log into your account over the web, typically from an internet browser. the e-mail software system is found on the service provider's network and your messages are held on there moreover. you can access your email and hold on messages from an internet browser on any laptop or Internet-connected device.

The previous examples are free services for personal use. For organisational use, you can rent productivity apps, like email, collaboration and calendaring; and sophisticated business applications like client relationship management (CRM), enterprise resource coming up with (ERP) and document management. You buy the use of those apps by subscription or per the level of use.

Advantages of SaaS Gain access to stylish applications. to supply SaaS apps to users, you don't ought to purchase, install, update or maintain any hardware, middleware or software system. SaaS makes even sophisticated enterprise applications, like ERP and CRM, affordable for organisations that lack the resources to shop for, deploy and manage the specified infrastructure and software system themselves.

Pay just for what you utilize. you furthermore may economize because the SaaS service automatically scales up and down per the level of usage.

Use free shopper software system. Users will run most SaaS apps directly from their web browser without needing to transfer and install any software system, though some apps need plugins. this suggests that you simply don't ought to purchase and install special software system for your users.

Mobilise your hands simply. SaaS makes it simple to "mobilise" your hands as a result of users will access SaaS apps and knowledge from any Internet-connected laptop or mobile device. You don't ought to worry concerning developing apps to run on differing types of computers and devices as a result of the service supplier has already done therefore. additionally, you don't ought to bring special experience aboard to manage the safety problems inherent in mobile computing. A fastidiously chosen service supplier can make sure the security of your knowledge, no matter the sort of device intense it.

Access app knowledge from anyplace. With knowledge held on within the cloud, users will access their info from any Internet-connected laptop or mobile device.

And once app knowledge is held on within the cloud, no knowledge is lost if a user's laptop or device fails.

NEW QUESTION 111

Attacker Lauren has gained the credentials of an organization's internal server system, and she was often logging in during irregular times to monitor the network activities. The organization was skeptical about the login times and appointed security professional Robert to determine the issue. Robert analyzed the compromised device to find incident details such as the type of attack, its severity, target, impact, method of propagation, and vulnerabilities exploited. What is the incident handling and response (IH&R) phase, in which Robert has determined these issues?

- A. Preparation
- B. Eradication
- C. Incident recording and assignment
- D. Incident triage

Answer: D

Explanation:

Triage is that the initial post-detection incident response method any responder can execute to open an event or false positive. Structuring an efficient and correct triage method can reduce analyst fatigue, reduce time to reply to and right incidents, and ensure that solely valid alerts are promoted to "investigation or incident" status.

Every part of the triage method should be performed with urgency, as each second counts once in the inside of a crisis. However, triage responders face the intense challenge of filtering an unwieldy input supply into a condensed trickle of events. Here are some suggestions for expediting analysis before knowledge is validated:

➤ **Organization:** reduce redundant analysis by developing a workflow that may assign tasks to responders.

Avoid sharing an email box or email alias between multiple responders. Instead use a workflow tool, like those in security orchestration, automation, and response (SOAR) solutions, to assign tasks. Implement a method to re-assign or reject tasks that are out of scope for triage.

➤ **Correlation:** Use a tool like a security info and event management (SIEM) to mix similar events. Link potentially connected events into one useful event.

➤ **Data Enrichment:** automate common queries your responders perform daily, like reverse DNS lookups, threat intelligence lookups, and IP/domain mapping.

Add this knowledge to the event record or make it simply accessible.

Moving full speed ahead is that the thanks to get through the initial sorting method however a a lot of detailed, measured approach is necessary throughout event verification. Presenting a robust case to be accurately evaluated by your security operations center (SOC) or cyber incident response team (CIRT) analysts is key. Here are many tips for the verification:

➤ **Adjacent Data:** Check the data adjacent to the event. for example, if an end has a virus signature hit, look to visualize if there's proof the virus is running before career for more response metrics.

➤ **Intelligence Review:** understand the context around the intelligence. simply because an ip address was flagged as a part of a botnet last week doesn't mean it still is an element of a botnet today.

➤ **Initial Priority:** Align with operational incident priorities and classify incidents appropriately. ensure the right level of effort is applied to every incident.

➤ **Cross Analysis:** look for and analyze potentially shared keys, like science addresses or domain names, across multiple knowledge sources for higher knowledge acurity.

NEW QUESTION 112

Ricardo has discovered the username for an application in his targets environment. As he has a limited amount of time, he decides to attempt to use a list of common passwords he found on the Internet. He compiles them into a list and then feeds that list as an argument into his password-cracking application, what type of attack is Ricardo performing?

- A. Known plaintext
- B. Password spraying
- C. Brute force
- D. Dictionary

Answer: D

Explanation:

A dictionary Attack as an attack vector utilized by the attacker to break in a very system, that is password protected, by golf shot technically each word in a very dictionary as a variety of password for that system. This attack vector could be a variety of Brute Force Attack.

The lexicon will contain words from an English dictionary and conjointly some leaked list of commonly used passwords and once combined with common character

substitution with numbers, will generally be terribly effective and quick.

How is it done?

Basically, it's attempting each single word that's already ready. it's done victimization machine-controlled tools that strive all the possible words within the dictionary.

Some password Cracking Software:

- John the ripper
- L0phtCrack
- Aircrack-ng

NEW QUESTION 115

Shiela is an information security analyst working at HiTech Security Solutions. She is performing service version discovery using Nmap to obtain information about the running services and their versions on a target system.

Which of the following Nmap options must she use to perform service version discovery on the target host?

- A. -SN
- B. -SX
- C. -sV
- D. -SF

Answer: C

NEW QUESTION 118

Which of the following is the primary objective of a rootkit?

- A. It opens a port to provide an unauthorized service
- B. It creates a buffer overflow
- C. It replaces legitimate programs
- D. It provides an undocumented opening in a program

Answer: C

NEW QUESTION 123

Which of the following statements is FALSE with respect to Intrusion Detection Systems?

- A. Intrusion Detection Systems can be configured to distinguish specific content in network packets
- B. Intrusion Detection Systems can easily distinguish a malicious payload in an encrypted traffic
- C. Intrusion Detection Systems require constant update of the signature library
- D. Intrusion Detection Systems can examine the contents of the data in context of the network protocol

Answer: B

NEW QUESTION 128

Wilson, a professional hacker, targets an organization for financial benefit and plans to compromise its systems by sending malicious emails. For this purpose, he uses a tool to track the emails of the target and extracts information such as sender identities, mail servers, sender IP addresses, and sender locations from different public sources. He also checks if an email address was leaked using the haveibeenpwned.com API. Which of the following tools is used by Wilson in the above scenario?

- A. Factiva
- B. Netcraft
- C. infoga
- D. Zoominfo

Answer: C

Explanation:

Infoga may be a tool gathering email accounts informations (ip,hostname,country,...) from completely different public supply (search engines, pgp key servers and shodan) and check if email was leaked using haveibeenpwned.com API. is a really simple tool, however very effective for the first stages of a penetration test or just to know the visibility of your company within the net.

NEW QUESTION 130

An unauthorized individual enters a building following an employee through the employee entrance after the lunch rush. What type of breach has the individual just performed?

- A. Reverse Social Engineering
- B. Tailgating
- C. Piggybacking
- D. Announced

Answer: B

NEW QUESTION 135

Sam is a penetration tester hired by Inception Tech, a security organization. He was asked to perform port scanning on a target host in the network. While performing the given task, Sam sends FIN/ACK probes and determines that an RST packet is sent in response by the target host, indicating that the port is closed. What is the port scanning technique used by Sam to discover open ports?

- A. Xmas scan
- B. IDLE/IPID header scan

- C. TCP Maimon scan
- D. ACK flag probe scan

Answer: C

Explanation:

TCP Maimon scan

This scan technique is very similar to NULL, FIN, and Xmas scan, but the probe used here is

FIN/ACK. In most cases, to determine if the port is open or closed, the RST packet should be generated as a response to a probe request. However, in many BSD systems, the port is open if the packet gets dropped in response to a probe.

<https://nmap.org/book/scan-methods-maimon-scan.html> How Nmap interprets responses to a Maimon scan probe

Probe Response Assigned State
No response received (even after retransmissions) open|filtered TCP RST packet closed

ICMP unreachable error (type 3, code 1, 2, 3, 9, 10, or 13) filtered

NEW QUESTION 137

Bob received this text message on his mobile phone: "Hello, this is Scott Smelby from the Yahoo Bank. Kindly contact me for a vital transaction on: scottsmelby@yahoo.com". Which statement below is true?

- A. This is a scam as everybody can get a @yahoo address, not the Yahoo customer service employees.
- B. This is a scam because Bob does not know Scott.
- C. Bob should write to scottmelby@yahoo.com to verify the identity of Scott.
- D. This is probably a legitimate message as it comes from a respectable organization.

Answer: A

NEW QUESTION 142

Which of the following tools is used to analyze the files produced by several packet-capture programs such as tcpdump, WinDump, Wireshark, and EtherPeek?

- A. tcptrace
- B. Nessus
- C. OpenVAS
- D. tcptraceroute

Answer: A

NEW QUESTION 144

You are analysing traffic on the network with Wireshark. You want to routinely run a cron job which will run the capture against a specific set of IPs - 192.168.8.0/24. What command you would use?

- A. wireshark --fetch "192.168.8*"
- B. wireshark --capture --local masked 192.168.8.0 ---range 24
- C. tshark -net 192.255.255.255 mask 192.168.8.0
- D. sudo tshark -f"net 192 .68.8.0/24"

Answer: D

NEW QUESTION 149

Study the following log extract and identify the attack.


```
12/26-07:06:22:31.167035 207.219.207.240:1882 -> 172.16.1.106:80
TCP TTL:13 TTL:50 TOS:0x0 IP:53476 DFF
***AP*** Seq: 0x2BDC107 Ack: 0x1CB9F186 Win: 0x2238 TcpLen: 20
47 45 54 2D 2F 6D 73 61 64 63 2F 2E 2E C0 AF 2E GET /msadc/.....
2E 2F 2E 2E C0 AF 2E 2E 2F 2E 2E C0 AF 2E 2E 2F ./...../...../
77 69 6E 6E 74 2F 73 79 73 74 65 6D 33 32 2F 63 winnt/system32/c
6D 64 2E 65 78 65 3F 2F 63 2B 64 69 72 2B 63 3A md.exe?/c+dir+c:
5C 20 48 54 54 50 2F 31 2E 31 0D 0A 41 63 63 65 \ HTTP/1.1..Acce
70 74 3A 2D 69 6D 61 67 65 2F 67 69 66 2C 20 69 pt: image/gif, i
6D 61 67 65 2F 78 2D 78 62 69 74 6D 61 70 2C 20 mage/x-xbitmap
69 6D 61 67 65 2F 6A 70 65 67 2C 20 69 6D 61 67 image/jpeg, imag
65 2F 70 6A 70 65 67 2C 20 61 70 70 6C 69 63 61 e/jpeg, applica
74 69 6F 6E 2F 76 6E 64 2E 6D 73 2D 65 78 63 65 tion/vnd.ms-exce
6C 2C 20 61 70 70 6C 69 63 61 74 69 6F 6E 2F 6D l, application/m
73 77 6F 72 64 2C 20 61 70 70 6C 69 63 61 74 69 sword, applicati
6F 6E 2F 76 6E 64 2E 6D 73 2D 70 6F 77 65 72 70 on/vnd.ms-powerp
6F 69 6E 74 2C 20 2A 2F 2A 0D 0A 41 63 63 65 70 oint, */*..Accep
74 2D 4C 6C 6C 61 2F 34 2E 30 20 28 63 6F 6D 70 ozilla/age: en-u
73 0D 0A 62 6C 65 3B 20 4D 53 49 45 20 35 2E 30 atible;pt-EncodD
6E 67 3A 57 69 6E 64 6F 77 73 20 39 35 29 0D 0A l; Windo, deflat
65 0D 0A 55 73 65 72 2D 41 67 65 6A 74 3A 20 4D e..User-Agent: M
6F 7A 69 6C 6C 61 2F 34 2E 30 20 28 63 6F 6D 70 ozilla/4.0 (comp
61 74 69 62 6C 65 3B 20 4D 53 49 45 20 35 2E 30 atible; MSIE 5.0
31 3B 20 57 69 6E 64 6F 77 73 20 39 35 29 0D 0A l; Windows 95)..
48 6F 73 74 3A 20 6C 61 62 2E 77 69 72 65 74 72 Host: lib.bvxttr
69 70 2E 6E 65 74 0D 0A 43 6F 6E 6E 65 63 74 69 ip.org..Connecti
6F 6E 3A 2D 4B 65 65 70 2D 41 6C 69 76 65 0D 0A on: Keep-Alive..
43 6F 6F 6B 69 65 3A 20 41 53 50 53 45 53 53 49 Cookie: ASPSESSI
4F 4E 49 44 47 51 51 51 51 51 5A 55 3D 4B 4E 4F ONIDGQQQQZU=KNO
48 4D 4F 4A 41 4B 50 46 4F 50 48 4D 4C 41 50 4E HMOJAKPFOPHMLAPN
49 46 49 46 42 0D 0A 0D 0A 41 50 4E 49 46 49 46 IFIFB....APNIFIF
42 0D 0A 0D 0A B....
```

- A. Hexcode Attack
- B. Cross Site Scripting
- C. Multiple Domain Traversal Attack
- D. Unicode Directory Traversal Attack

Answer: D

NEW QUESTION 154

Which of the following tactics uses malicious code to redirect users' web traffic?

- A. Spimming
- B. Pharming
- C. Phishing
- D. Spear-phishing

Answer: B

NEW QUESTION 159

infecting a system with malware and using phishing to gain credentials to a system or web application are examples of which phase of the ethical hacking methodology?

- A. Reconnaissance
- B. Maintaining access
- C. Scanning
- D. Gaining access

Answer: D

Explanation:

This phase having the hacker uses different techniques and tools to realize maximum data from the system. they're → Password cracking – Methods like Bruteforce, dictionary attack, rule-based attack, rainbow table a used. Bruteforce is trying all combinations of the password. Dictionary attack is trying an inventory of meaningful words until the password matches. Rainbow table takes the hash value of the password and compares with pre-computed hash values until a match is discovered. • Password attacks – Passive attacks like wire sniffing, replay attack. Active online attack like Trojans, keyloggers, hash injection, phishing. Offline attacks like pre-computed hash, distributed network and rainbow. Non electronic attack like shoulder surfing, social engineering and dumpster diving.

NEW QUESTION 163

Your company performs penetration tests and security assessments for small and medium-sized business in the local area. During a routine security assessment, you discover information that suggests your client is involved with human trafficking.

What should you do?

- A. Confront the client in a respectful manner and ask her about the data.
- B. Copy the data to removable media and keep it in case you need it.
- C. Ignore the data and continue the assessment until completed as agreed.
- D. Immediately stop work and contact the proper legal authorities.

Answer: D

NEW QUESTION 167

Nathan is testing some of his network devices. Nathan is using Macof to try and flood the ARP cache of these switches. If these switches' ARP cache is successfully flooded, what will be the result?

- A. The switches will drop into hub mode if the ARP cache is successfully flooded.
- B. If the ARP cache is flooded, the switches will drop into pix mode making it less susceptible to attacks.
- C. Depending on the switch manufacturer, the device will either delete every entry in its ARP cache or reroute packets to the nearest switch.
- D. The switches will route all traffic to the broadcast address created collisions.

Answer: A

NEW QUESTION 170

Which of the following programming languages is most susceptible to buffer overflow attacks, due to its lack of a built-in bounds checking mechanism?

Code:

```
#include <string.h> int main(){char buffer[8];  
strcpy(buffer, "1111111111111111111111111111");} Output: Segmentation fault
```

- A. C#
B. Python
C. Java
D. C++

Answer: D

NEW QUESTION 172

Abel, a cloud architect, uses container technology to deploy applications/software including all its dependencies, such as libraries and configuration files, binaries, and other resources that run independently from other processes in the cloud environment. For the containerization of applications, he follows the five-tier container technology architecture. Currently, Abel is verifying and validating image contents, signing images, and sending them to the registries. Which of the following tiers of the container technology architecture is Abel currently working in?

- A. Tier-1: Developer machines
- B. Tier-4: Orchestrators
- C. Tier-3: Registries
- D. Tier-2: Testing and accreditation systems

Answer: D

Explanation:

The official management decision given by a senior agency official to authorize operation of an information system and to explicitly accept the risk to agency operations (including mission, functions, image, or reputation), agency assets, or individuals, based on the implementation of an agreed-upon set of security controls.

formal declaration by a designated accrediting authority (DAA) or principal accrediting authority (PAA) that an information system is approved to operate at an acceptable level of risk, based on the implementation of an approved set of technical, managerial, and procedural safeguards. See authorization to operate (ATO).

Rationale: The Risk Management Framework uses a new term to refer to this concept, and it is called authorization.

Identifies the information resources covered by an accreditation decision, as distinguished from separately accredited information resources that are interconnected or with which information is exchanged via messaging. Synonymous with Security Perimeter.

For the purposes of identifying the Protection Level for confidentiality of a system to be accredited, the system has a conceptual boundary that extends to all intended users of the system, both directly and indirectly connected, who receive output from the system. See authorization boundary. Rationale: The Risk Management Framework uses a new term to refer to the concept of accreditation, and it is called authorization. Extrapolating, the accreditation boundary would then be referred to as the authorization boundary.

NEW QUESTION 174

Which DNS resource record can indicate how long any "DNS poisoning" could last?

- A. MX
B. SOA
C. NS
D. TIMEOUT

Answer: B

NEW QUESTION 175

What would be the fastest way to perform content enumeration on a given web server by using the Gobuster tool?

- A. Performing content enumeration using the bruteforce mode and 10 threads
- B. Shipping SSL certificate verification
- C. Performing content enumeration using a wordlist
- D. Performing content enumeration using the bruteforce mode and random file extensions

Answer: A

NEW QUESTION 177

Rebecca, a security professional, wants to authenticate employees who use web services for safe and secure communication. In this process, she employs a component of the Web Service Architecture, which is an extension of SOAP, and it can maintain the integrity and confidentiality of SOAP messages. Which of the following components of the Web Service Architecture is used by Rebecca for securing the communication?

- A. WSDL
- B. WS Work Processes
- C. WS-Policy
- D. WS-Security

Answer: D

NEW QUESTION 179

Chandler works as a pen-tester in an IT-firm in New York. As a part of detecting viruses in the systems, he uses a detection method where the anti-virus executes the malicious codes on a virtual machine to simulate CPU and memory activities. Which type of virus detection method did Chandler use in this context?

- A. Heuristic Analysis
- B. Code Emulation
- C. Scanning
- D. Integrity checking

Answer: B

NEW QUESTION 183

Which of the following tools is used to detect wireless LANs using the 802.11a/b/g/n WLAN standards on a linux platform?

- A. Kismet
- B. Abel
- C. Netstumbler
- D. Nessus

Answer: A

NEW QUESTION 187

Which of the following viruses tries to hide from anti-virus programs by actively altering and corrupting the chosen service call interruptions when they are being run?

- A. Macro virus
- B. Stealth/Tunneling virus
- C. Cavity virus
- D. Polymorphic virus

Answer: B

NEW QUESTION 188

What does the -oX flag do in an Nmap scan?

- A. Perform an eXpress scan
- B. Output the results in truncated format to the screen
- C. Output the results in XML format to a file
- D. Perform an Xmas scan

Answer: C

NEW QUESTION 190

An attacker utilizes a Wi-Fi Pineapple to run an access point with a legitimate-looking SSID for a nearby business in order to capture the wireless password. What kind of attack is this?

- A. MAC spoofing attack
- B. Evil-twin attack
- C. War driving attack
- D. Phishing attack

Answer: B

NEW QUESTION 195

When purchasing a biometric system, one of the considerations that should be reviewed is the processing speed. Which of the following best describes what it is meant by processing?

- A. The amount of time and resources that are necessary to maintain a biometric system
- B. How long it takes to setup individual user accounts
- C. The amount of time it takes to be either accepted or rejected from when an individual provides identification and authentication information
- D. The amount of time it takes to convert biometric data into a template on a smart card

Answer: C

NEW QUESTION 197

Jason, an attacker, targeted an organization to perform an attack on its Internet-facing web server with the intention of gaining access to backend servers, which are protected by a firewall. In this process, he used a URL <https://xyz.com/feed.php?url:externalsile.com/feed/to> to obtain a remote feed and altered the URL input to the local host to view all the local resources on the target server. What is the type of attack Jason performed In the above scenario?

- A. website defacement
- B. Server-side request forgery (SSRF) attack
- C. Web server misconfiguration
- D. web cache poisoning attack

Answer: B

Explanation:

Server-side request forgery (also called SSRF) is a net security vulnerability that allows an assaulter to induce the server-side application to make http requests to associate arbitrary domain of the attacker's choosing.

In typical SSRF examples, the attacker might cause the server to make a connection back to itself, or to other web-based services among the organization's infrastructure, or to external third-party systems.

Another type of trust relationship that often arises with server-side request forgery is where the application server is able to interact with different back-end systems that aren't directly reachable by users. These systems typically have non-routable private informatics addresses. Since the back-end systems normally ordinarily protected by the topology, they typically have a weaker security posture. In several cases, internal back-end systems contain sensitive functionality that may be accessed while not authentication by anyone who is able to act with the systems.

In the preceding example, suppose there's an body interface at the back-end url <https://192.168.0.68/admin>. Here, an attacker will exploit the SSRF vulnerability to access the executive interface by submitting the following request:

POST /product/stock HTTP/1.0

Content-Type: application/x-www-form-urlencoded Content-Length: 118 stockApi=<http://192.168.0.68/admin>

NEW QUESTION 200

Session splicing is an IDS evasion technique in which an attacker delivers data in multiple, small sized packets to the target computer, making it very difficult for an IDS to detect the attack signatures. Which tool can be used to perform session splicing attacks?

- A. tcpsplice
- B. Burp
- C. Hydra
- D. Whisker

Answer: D

NEW QUESTION 203

Calvin, a grey-hat hacker, targets a web application that has design flaws in its authentication mechanism. He enumerates usernames from the login form of the web application, which requests users to feed data and specifies the incorrect field in case of invalid credentials. Later, Calvin uses this information to perform social engineering.

Which of the following design flaws in the authentication mechanism is exploited by Calvin?

- A. Insecure transmission of credentials
- B. Verbose failure messages
- C. User impersonation
- D. Password reset mechanism

Answer: D

NEW QUESTION 205

John is an incident handler at a financial institution. His steps in a recent incident are not up to the standards of the company. John frequently forgets some steps and procedures while handling responses as they are very stressful to perform. Which of the following actions should John take to overcome this problem with the least administrative effort?

- A. Create an incident checklist.
- B. Select someone else to check the procedures.
- C. Increase his technical skills.
- D. Read the incident manual every time it occurs.

Answer: C

NEW QUESTION 209

_____ is a tool that can hide processes from the process list, can hide files, registry entries, and intercept keystrokes.

- A. Trojan
- B. RootKit
- C. DoS tool
- D. Scanner
- E. Backdoor

Answer: B

NEW QUESTION 213

Andrew is an Ethical Hacker who was assigned the task of discovering all the active devices hidden by a restrictive firewall in the IPv4 range in a given target

network.

Which of the following host discovery techniques must he use to perform the given task?

- A. UDP scan
- B. TCP Maimon scan
- C. arp ping scan
- D. ACK flag probe scan

Answer: C

Explanation:

One of the most common Nmap usage scenarios is scanning an Ethernet LAN. Most LANs, especially those that use the private address range granted by RFC 1918, do not always use the overwhelming majority of IP addresses. When Nmap attempts to send a raw IP packet, such as an ICMP echo request, the OS must determine a destination hardware (ARP) address, such as the target IP, so that the Ethernet frame can be properly addressed. .. This is required to issue a series of ARP requests. This is best illustrated by an example where a ping scan is attempted against an Area Ethernet host. The `--send-ip` option tells Nmap to send IP-level packets (rather than raw Ethernet), even on area networks. The Wireshark output of the three ARP requests and their timing have been pasted into the session.

Raw IP ping scan example for offline targets This example took quite a couple of seconds to finish because the (Linux) OS sent three ARP requests at 1 second intervals before abandoning the host. Waiting for a few seconds is excessive, as long as the ARP response usually arrives within a few milliseconds. Reducing this timeout period is not a priority for OS vendors, as the overwhelming majority of packets are sent to the host that actually exists. Nmap, on the other hand, needs to send packets to 16 million IP s given a target like 10.0.0.0/8. Many targets are pinged in parallel, but waiting 2 seconds each is very delayed.

There is another problem with raw IP ping scans on the LAN. If the destination host turns out to be unresponsive, as in the previous example, the source host usually adds an incomplete entry for that destination IP to the kernel ARP table. ARP tablespaces are finite and some operating systems become unresponsive when full. If Nmap is used in rawIP mode (`--send-ip`), Nmap may have to wait a few minutes for the ARP cache entry to expire before continuing host discovery. ARP scans solve both problems by giving Nmap the highest priority. Nmap issues raw ARP requests and handles retransmissions and timeout periods in its sole discretion. The system ARP cache is bypassed. The example shows the difference. This ARP scan takes just over a tenth of the time it takes for an equivalent IP. Example b ARP ping scan of offline target



In example b, neither the `-PR` option nor the `--send-eth` option has any effect. This is often because ARP has a default scan type on the Area Ethernet network when scanning Ethernet hosts that Nmap discovers. This includes traditional wired Ethernet as 802.11 wireless networks. As mentioned above, ARP scanning is not only more efficient, but also more accurate. Hosts frequently block IP-based ping packets, but usually cannot block ARP requests or responses and communicate over the network. Nmap uses ARP instead of all targets on equivalent targets, even if different ping types (such as `-PE` and `-PS`) are specified. LAN.. If you do not need to attempt an ARP scan at all, specify `--send-ip` as shown in Example a “Raw IP Ping Scan for Offline Targets”.

If you give Nmap control to send raw Ethernet frames, Nmap can also adjust the source MAC address. If you have the only PowerBook in your security conference room and a large ARP scan is initiated from an

Apple-registered MAC address, your head may turn to you. Use the `--spoof-mac` option to spoof the MAC address as described in the MAC Address Spoofing section.

NEW QUESTION 216

Eve is spending her day scanning the library computers. She notices that Alice is using a computer whose port 445 is active and listening. Eve uses the ENUM tool to enumerate Alice machine. From the command prompt, she types the following command.

```
For /f "tokens=1 %%a in (hackfile.txt) do net use *  
\\10.1.2.3\c$ /user:"Administrator" %%a
```

What is Eve trying to do?

- A. Eve is trying to connect as a user with Administrator privileges
- B. Eve is trying to enumerate all users with Administrative privileges
- C. Eve is trying to carry out a password crack for user Administrator
- D. Eve is trying to escalate privilege of the null user to that of Administrator

Answer: C

NEW QUESTION 218

During a recent security assessment, you discover the organization has one Domain Name Server (DNS) in a Demilitarized Zone (DMZ) and a second DNS server on the internal network.

What is this type of DNS configuration commonly called?

- A. DynDNS
- B. DNS Scheme
- C. DNSSEC
- D. Split DNS

Answer: D

NEW QUESTION 222

Mike, a security engineer, was recently hired by BigFox Ltd. The company recently experienced disastrous DoS attacks. The management had instructed Mike to build defensive strategies for the company's IT infrastructure to thwart DoS/DDoS attacks. Mike deployed some countermeasures to handle jamming and scrambling attacks. What is the countermeasure Mike applied to defend against jamming and scrambling attacks?

- A. Allow the usage of functions such as gets and strcpy
- B. Allow the transmission of all types of addressed packets at the ISP level
- C. Implement cognitive radios in the physical layer
- D. A Disable TCP SYN cookie protection

Answer: D

NEW QUESTION 225

How is the public key distributed in an orderly, controlled fashion so that the users can be sure of the sender's identity?

- A. Hash value
- B. Private key
- C. Digital signature
- D. Digital certificate

Answer: D

NEW QUESTION 226

In an internal security audit, the white hat hacker gains control over a user account and attempts to acquire access to another account's confidential files and information. How can he achieve this?

- A. Privilege Escalation
- B. Shoulder-Surfing
- C. Hacking Active Directory
- D. Port Scanning

Answer: A

NEW QUESTION 229

OpenSSL on Linux servers includes a command line tool for testing TLS. What is the name of the tool and the correct syntax to connect to a web server?

- A. openssl s_client -site www.website.com:443
- B. openssl_client -site www.website.com:443
- C. openssl s_client -connect www.website.com:443
- D. openssl_client -connect www.website.com:443

Answer: C

NEW QUESTION 232

Which of the following is considered an exploit framework and has the ability to perform automated attacks on services, ports, applications and unpatched security flaws in a computer system?

- A. Wireshark
- B. Maltego
- C. Metasploit
- D. Nessus

Answer: C

NEW QUESTION 236

Alex, a cloud security engineer working in Eyecloud Inc. is tasked with isolating applications from the underlying infrastructure and stimulating communication via well-defined channels. For this purpose, he used an open-source technology that helped him in developing, packaging, and running applications; further, the technology provides PaaS through OS-level visualization, delivers containerized software packages, and promotes fast software delivery. What is the cloud technology employed by Alex in the above scenario?

- A. Virtual machine
- B. Serverless computing
- C. Docker
- D. Zero trust network

Answer: C

NEW QUESTION 240

An attacker attaches a rogue router in a network. He wants to redirect traffic to a LAN attached to his router as part of a man-in-the-middle attack. What measure on behalf of the legitimate admin can mitigate this attack?

- A. Make sure that legitimate network routers are configured to run routing protocols with authentication.
- B. Disable all routing protocols and only use static routes
- C. Only using OSPFv3 will mitigate this risk.
- D. Redirection of the traffic cannot happen unless the admin allows it explicitly.

Answer: A

NEW QUESTION 243

In the context of Windows Security, what is a 'null' user?

- A. A user that has no skills
- B. An account that has been suspended by the admin
- C. A pseudo account that has no username and password
- D. A pseudo account that was created for security administration purpose

Answer: C

NEW QUESTION 248

Which of the following algorithms can be used to guarantee the integrity of messages being sent, in transit, or stored?

- A. symmetric algorithms
- B. asymmetric algorithms
- C. hashing algorithms
- D. integrity algorithms

Answer: C

NEW QUESTION 249

Clark, a professional hacker, was hired by an organization to gather sensitive information about its competitors surreptitiously. Clark gathers the server IP address of the target organization using Whois footprinting. Further, he entered the server IP address as an input to an online tool to retrieve information such as the network range of the target organization and to identify the network topology and operating system used in the network. What is the online tool employed by Clark in the above scenario?

- A. AOL
- B. ARIN
- C. DuckDuckGo
- D. Baidu

Answer: B

Explanation:

<https://search.arin.net/rdap/?query=199.43.0.43>

NEW QUESTION 251

Joseph was the Web site administrator for the Mason Insurance in New York, who's main Web site was located at www.masonins.com. Joseph uses his laptop computer regularly to administer the Web site. One night, Joseph received an urgent phone call from his friend, Smith. According to Smith, the main Mason Insurance web site had been vandalized! All of its normal content was removed and replaced with an attacker's message "Hacker Message: You are dead! Freaks!" From his office, which was directly connected to Mason Insurance's internal network, Joseph surfed to the Web site using his laptop. In his browser, the Web site looked completely intact.

No changes were apparent. Joseph called a friend of his at his home to help troubleshoot the problem. The Web site appeared defaced when his friend visited using his DSL connection. So, while Smith and his friend could see the defaced page, Joseph saw the intact Mason Insurance web site. To help make sense of this problem, Joseph decided to access the Web site using his dial-up ISP. He disconnected his laptop from the corporate internal network and used his modem to dial up the same ISP used by Smith. After his modem connected, he quickly typed www.masonins.com in his browser to reveal the following web page:

```
H@cker Mess@g@:
Y0u @re De@d! Fre@ks!
```

After seeing the defaced Web site, he disconnected his dial-up line, reconnected to the internal network, and used Secure Shell (SSH) to log in directly to the Web server. He ran Tripwire against the entire Web site, and determined that every system file and all the Web content on the server were intact. How did the attacker accomplish this hack?

- A. ARP spoofing
- B. SQL injection
- C. DNS poisoning
- D. Routing table injection

Answer: C

NEW QUESTION 256

A network admin contacts you. He is concerned that ARP spoofing or poisoning might occur on his network. What are some things he can do to prevent it? Select the best answers.

- A. Use port security on his switches.
- B. Use a tool like ARPwatch to monitor for strange ARP activity.
- C. Use a firewall between all LAN segments.
- D. If you have a small network, use static ARP entries.
- E. Use only static IP addresses on all PC's.

Answer: ABD

NEW QUESTION 259

What useful information is gathered during a successful Simple Mail Transfer Protocol (SMTP) enumeration?

- A. The two internal commands VRFY and EXPN provide a confirmation of valid users, email addresses, aliases, and mailing lists.
- B. Reveals the daily outgoing message limits before mailboxes are locked
- C. The internal command RCPT provides a list of ports open to message traffic.
- D. A list of all mail proxy server addresses used by the targeted host

Answer: A

NEW QUESTION 261

An attacker runs netcat tool to transfer a secret file between two hosts.

```
Machine A: netcat -l -p 1234 < secretfile
Machine B: netcat 192.168.3.4 > 1234
```

He is worried about information being sniffed on the network.

How would the attacker use netcat to encrypt the information before transmitting onto the wire?

- A. Machine A: netcat -l -p -s password 1234 < testfileMachine B: netcat <machine A IP> 1234
- B. Machine A: netcat -l -e magickey -p 1234 < testfileMachine B: netcat <machine A IP> 1234
- C. Machine A: netcat -l -p 1234 < testfile -pw passwordMachine B: netcat <machine A IP> 1234 -pw password
- D. Use cryptcat instead of netcat

Answer: D

NEW QUESTION 266

Which of the following steps for risk assessment methodology refers to vulnerability identification?

- A. Determines if any flaws exist in systems, policies, or procedures
- B. Assigns values to risk probabilities; Impact values.
- C. Determines risk probability that vulnerability will be exploited (High, Medium, Low)
- D. Medium, Low)
- E. Identifies sources of harm to an IT system
- F. (Natural, Human, Environmental)
- G. Environmental)

Answer: C

NEW QUESTION 270

John, a professional hacker, performs a network attack on a renowned organization and gains unauthorized access to the target network. He remains in the network without being detected for a long time and obtains sensitive information without sabotaging the organization. Which of the following attack techniques is used by John?

- A. Advanced persistent threat
- B. threat Diversion theft
- C. Spear-phishing sites
- D. insider threat

Answer: A

Explanation:

An advanced persistent threat (APT) may be a broad term used to describe an attack campaign within which an intruder, or team of intruders, establishes a foothold, long presence on a network so as to mine sensitive knowledge.

The targets of those assaults, that square measure terribly fastidiously chosen and researched, usually embrace massive enterprises or governmental networks. the implications of such intrusions square measure huge, and include:

- Intellectual property thieving (e.g., trade secrets or patents)
- Compromised sensitive info (e.g., worker and user personal data)
- The sabotaging of essential structure infrastructures (e.g., information deletion)
- Total website takeovers

Executing an APT assault needs additional resources than a regular internet application attack. The perpetrators square measure typically groups of intimate cybercriminals having substantial resource. Some APT attacks square measure government-funded and used as cyber warfare weapons.

APT attacks dissent from ancient internet application threats, in that:

- They're considerably additional advanced.
- They're not hit and run attacks—once a network is infiltrated, the culprit remains so as to realize the maximum amount info as potential.
- They're manually dead (not automated) against a selected mark and indiscriminately launched against an outsized pool of targets.
- They typically aim to infiltrate a complete network, as opposition one specific half.

More common attacks, like remote file inclusion (RFI), SQL injection and cross-site scripting (XSS), square measure oftentimes employed by perpetrators to ascertain a foothold in a very targeted network. Next, Trojans and backdoor shells square measure typically wont to expand that foothold and make a persistent presence inside the targeted perimeter.

NEW QUESTION 272

CyberTech Inc. recently experienced SQL injection attacks on its official website. The company appointed Bob, a security professional, to build and incorporate defensive strategies against such attacks. Bob adopted a practice whereby only a list of entities such as the data type, range, size, and value, which have been approved for secured access, is accepted. What is the defensive technique employed by Bob in the above scenario?

- A. Output encoding
- B. Enforce least privileges
- C. Whitelist validation
- D. Blacklist validation

Answer: C

NEW QUESTION 274

Why is a penetration test considered to be more thorough than vulnerability scan?

- A. Vulnerability scans only do host discovery and port scanning by default.
- B. A penetration test actively exploits vulnerabilities in the targeted infrastructure, while a vulnerability scan does not typically involve active exploitation.
- C. It is not – a penetration test is often performed by an automated tool, while a vulnerability scan requires active engagement.
- D. The tools used by penetration testers tend to have much more comprehensive vulnerability databases.

Answer: B

NEW QUESTION 279

You are attempting to crack LM Manager hashed from Windows 2000 SAM file. You will be using LM Brute force hacking tool for decryption. What encryption algorithm will you be decrypting?

- A. MD4
- B. DES
- C. SHA
- D. SSL

Answer: B

NEW QUESTION 283

What is the known plaintext attack used against DES which gives the result that encrypting plaintext with one DES key followed by encrypting it with a second DES key is no more secure than using a single key?

- A. Man-in-the-middle attack
- B. Meet-in-the-middle attack
- C. Replay attack
- D. Traffic analysis attack

Answer: B

NEW QUESTION 287

Which address translation scheme would allow a single public IP address to always correspond to a single machine on an internal network, allowing "server publishing"?

- A. Overloading Port Address Translation
- B. Dynamic Port Address Translation
- C. Dynamic Network Address Translation
- D. Static Network Address Translation

Answer: D

NEW QUESTION 288

What kind of detection techniques is being used in antivirus software that identifies malware by collecting data from multiple protected systems and instead of analyzing files locally it's made on the provider's environment?

- A. Behavioral based
- B. Heuristics based
- C. Honeypot based
- D. Cloud based

Answer: D

NEW QUESTION 291

Steve, an attacker, created a fake profile on a social media website and sent a request to Stella. Stella was enthralled by Steve's profile picture and the description given for his profile, and she initiated a conversation with him soon after accepting the request. After a few days, Steve started asking about her company details and eventually gathered all the essential information regarding her company. What is the social engineering technique Steve employed in the above scenario?

- A. Diversion theft
- B. Baiting
- C. Honey trap
- D. Piggybacking

Answer: C

Explanation:

The honey trap is a technique where an attacker targets a person online by pretending to be an attractive person and then begins a fake online relationship to obtain confidential information about the target company. In this technique, the victim is an insider who possesses critical information about the target organization.

Baiting is a technique in which attackers offer end users something alluring in exchange for important information such as login details and other sensitive data. This technique relies on the curiosity and greed of the end-users. Attackers perform this technique by leaving a physical device such as a USB flash drive containing malicious files in locations where people can easily find them, such as parking lots, elevators, and bathrooms. This physical device is labeled with a legitimate company's logo, thereby tricking end-users into trusting it and opening it on their systems. Once the victim connects and opens the device, a malicious file downloads. It infects the system and allows the attacker to take control.

For example, an attacker leaves some bait in the form of a USB drive in the elevator with the label "Employee Salary Information 2019" and a legitimate company's logo. Out of curiosity and greed, the victim picks up the device and opens it up on their system, which downloads the bait. Once the bait is downloaded, a piece of malicious software installs on the victim's system, giving the attacker access.

NEW QUESTION 294

During the enumeration phase, Lawrence performs banner grabbing to obtain information such as OS details and versions of services running. The service that he enumerated runs directly on TCP port 445.

Which of the following services is enumerated by Lawrence in this scenario?

- A. Server Message Block (SMB)
- B. Network File System (NFS)
- C. Remote procedure call (RPC)

D. Telnet

Answer: A

Explanation:

Worker Message Block (SMB) is an organization document sharing and information texture convention. SMB is utilized by billions of gadgets in a different arrangement of working frameworks, including Windows, MacOS, iOS , Linux, and Android. Customers use SMB to get to information on workers. This permits sharing of records, unified information the board, and brought down capacity limit needs for cell phones. Workers additionally use SMB as a feature of the Software-characterized Data Center for outstanding burdens like grouping and replication.

Since SMB is a far off record framework, it requires security from assaults where a Windows PC may be fooled into reaching a pernicious worker running inside a confided in organization or to a far off worker outside the organization edge. Firewall best practices and arrangements can upgrade security keeping malevolent traffic from leaving the PC or its organization.

For Windows customers and workers that don't have SMB shares, you can obstruct all inbound SMB traffic utilizing the Windows Defender Firewall to keep far off associations from malignant or bargained gadgets. In the Windows Defender Firewall, this incorporates the accompanying inbound principles.

Name	Profile	Enabled
File and Printer Sharing (SMB-In)	All	No
Internet Service (NP-In)	All	No
Remote Event Log Management (NP-In)	All	Yes
Remote Service Management (NP-In)	All	No

You should also create a new blocking rule to override any other inbound firewall rules. Use the following suggested settings for any Windows clients or servers that do not host SMB Shares:

- > Name: Block all inbound SMB 445
- > Description: Blocks all inbound SMB TCP 445 traffic. Not to be applied to domain controllers or computers that host SMB shares.
- > Action: Block the connection
- > Programs: All
- > Remote Computers: Any
- > Protocol Type: TCP
- > Local Port: 445
- > Remote Port: Any
- > Profiles: All
- > Scope (Local IP Address): Any
- > Scope (Remote IP Address): Any
- > Edge Traversal: Block edge traversal

You must not globally block inbound SMB traffic to domain controllers or file servers. However, you can restrict access to them from trusted IP ranges and devices to lower their attack surface. They should also be restricted to Domain or Private firewall profiles and not allow Guest/Public traffic.

NEW QUESTION 295

Which of the following tools performs comprehensive tests against web servers, including dangerous files and CGIs?

- A. Nikto
- B. John the Ripper
- C. Dsniff
- D. Snort

Answer: A

NEW QUESTION 298

MX record priority increases as the number increases. (True/False.)

- A. True
- B. False

Answer: B

NEW QUESTION 300

In an attempt to damage the reputation of a competitor organization, Hailey, a professional hacker, gathers a list of employee and client email addresses and other related information by using various search engines, social networking sites, and web spidering tools. In this process, she also uses an automated tool to gather a list of words from the target website to further perform a brute-force attack on the previously gathered email addresses.

What is the tool used by Hailey for gathering a list of words from the target website?

- A. Shadowsocks
- B. CeWL
- C. Psiphon
- D. Orbot

Answer: B

NEW QUESTION 301

Within the context of Computer Security, which of the following statements describes Social Engineering best?

- A. Social Engineering is the act of publicly disclosing information
- B. Social Engineering is the means put in place by human resource to perform time accounting
- C. Social Engineering is the act of getting needed information from a person rather than breaking into a system

D. Social Engineering is a training program within sociology studies

Answer: C

NEW QUESTION 303

Matthew, a black hat, has managed to open a meterpreter session to one of the kiosk machines in Evil Corp's lobby. He checks his current SID, which is S-1-5-21-1223352397-1872883824-861252104-501. What needs to happen before Matthew has full administrator access?

- A. He must perform privilege escalation.
- B. He needs to disable antivirus protection.
- C. He needs to gain physical access.
- D. He already has admin privileges, as shown by the "501" at the end of the SID.

Answer: A

NEW QUESTION 307

Roma is a member of a security team. She was tasked with protecting the internal network of an organization from imminent threats. To accomplish this task, Roma fed threat intelligence into the security devices in a digital format to block and identify inbound and outbound malicious traffic entering the organization's network.

Which type of threat intelligence is used by Roma to secure the internal network?

- A. Technical threat intelligence
- B. Operational threat intelligence
- C. Tactical threat intelligence
- D. Strategic threat intelligence

Answer: A

NEW QUESTION 309

What is the least important information when you analyze a public IP address in a security alert?

- A. DNS
- B. Whois
- C. Geolocation
- D. ARP

Answer: D

NEW QUESTION 311

What port number is used by LDAP protocol?

- A. 110
- B. 389
- C. 464
- D. 445

Answer: B

NEW QUESTION 316

Which mode of IPSec should you use to assure security and confidentiality of data within the same LAN?

- A. ESP transport mode
- B. ESP confidential
- C. AH permiscuous
- D. AH Tunnel mode

Answer: A

NEW QUESTION 321

You are tasked to perform a penetration test. While you are performing information gathering, you find an employee list in Google. You find the receptionist's email, and you send her an email changing the source email to her boss's email (boss@company). In this email, you ask for a pdf with information. She reads your email and sends back a pdf with links. You exchange the pdf links with your malicious links (these links contain malware) and send back the modified pdf, saying that the links don't work. She reads your email, opens the links, and her machine gets infected. You now have access to the company network. What testing method did you use?

- A. Social engineering
- B. Piggybacking
- C. Tailgating
- D. Eavesdropping

Answer: A

NEW QUESTION 325

Kate dropped her phone and subsequently encountered an issue with the phone's internal speaker. Thus, she is using the phone's loudspeaker for phone calls and other activities. Bob, an attacker, takes advantage of this vulnerability and secretly exploits the hardware of Kate's phone so that he can monitor the

loudspeaker's output from data sources such as voice assistants, multimedia messages, and audio files by using a malicious app to breach speech privacy. What is the type of attack Bob performed on Kate in the above scenario?

- A. Man-in-the-disk attack
- B. aLTer attack
- C. SIM card attack
- D. Spearphone attack

Answer: D

NEW QUESTION 329

Which of the following is an extremely common IDS evasion technique in the web world?

- A. Spyware
- B. Subnetting
- C. Unicode Characters
- D. Port Knocking

Answer: C

NEW QUESTION 334

You have gained physical access to a Windows 2008 R2 server which has an accessible disc drive. When you attempt to boot the server and log in, you are unable to guess the password. In your toolkit, you have an Ubuntu 9.10 Linux LiveCD. Which Linux-based tool can change any user's password or activate disabled Windows accounts?

- A. John the Ripper
- B. SET
- C. CHNTPW
- D. Cain & Abel

Answer: C

NEW QUESTION 335

Your organization has signed an agreement with a web hosting provider that requires you to take full responsibility of the maintenance of the cloud-based resources. Which of the following models covers this?

- A. Platform as a service
- B. Software as a service
- C. Functions as a
- D. service Infrastructure as a service

Answer: C

NEW QUESTION 339

During an Xmas scan what indicates a port is closed?

- A. No return response
- B. RST
- C. ACK
- D. SYN

Answer: B

NEW QUESTION 341

Which of the following is the best countermeasure to encrypting ransomwares?

- A. Use multiple antivirus softwares
- B. Pay a ransom
- C. Keep some generation of off-line backup
- D. Analyze the ransomware to get decryption key of encrypted data

Answer: C

NEW QUESTION 343

Which wireless security protocol replaces the personal pre-shared key (PSK) authentication with Simultaneous Authentication of Equals (SAE) and is therefore resistant to offline dictionary attacks?

- A. WPA3-Personal
- B. WPA2-Enterprise
- C. Bluetooth
- D. ZigBee

Answer: A

NEW QUESTION 345

Your company was hired by a small healthcare provider to perform a technical assessment on the network. What is the best approach for discovering vulnerabilities on a Windows-based computer?

- A. Use the built-in Windows Update tool
- B. Use a scan tool like Nessus
- C. Check MITRE.org for the latest list of CVE findings
- D. Create a disk image of a clean Windows installation

Answer: B

NEW QUESTION 347

BitLocker encryption has been implemented for all the Windows-based computers in an organization. You are concerned that someone might lose their cryptographic key. Therefore, a mechanism was implemented to recover the keys from Active Directory. What is this mechanism called in cryptography?

- A. Key archival
- B. Key escrow.
- C. Certificate rollover
- D. Key renewal

Answer: B

NEW QUESTION 351

Becky has been hired by a client from Dubai to perform a penetration test against one of their remote offices. Working from her location in Columbus, Ohio, Becky runs her usual reconnaissance scans to obtain basic information about their network. When analyzing the results of her Whois search, Becky notices that the IP was allocated to a location in Le Havre, France. Which regional Internet registry should Becky go to for detailed information?

- A. ARIN
- B. APNIC
- C. RIPE
- D. LACNIC

Answer: C

Explanation:

Regional Internet Registries (RIRs):

ARIN (American Registry for Internet Numbers) AFRINIC (African Network Information Center) APNIC (Asia Pacific Network Information Center)

RIPE (Réseaux IP Européens Network Coordination Centre)

LACNIC (Latin American and Caribbean Network Information Center)

NEW QUESTION 355

Vlady works in a fishing company where the majority of the employees have very little understanding of IT let alone IT Security. Several information security issues that Vlady often found includes, employees sharing password, writing his/her password on a post it note and stick it to his/her desk, leaving the computer unlocked, didn't log out from emails or other social media accounts, and etc.

After discussing with his boss, Vlady decided to make some changes to improve the security environment in his company. The first thing that Vlady wanted to do is to make the employees understand the importance of keeping confidential information, such as password, a secret and they should not share it with other persons. Which of the following steps should be the first thing that Vlady should do to make the employees in his company understand to importance of keeping confidential information a secret?

- A. Warning to those who write password on a post it note and put it on his/her desk
- B. Developing a strict information security policy
- C. Information security awareness training
- D. Conducting a one to one discussion with the other employees about the importance of information security

Answer: A

NEW QUESTION 356

Yancey is a network security administrator for a large electric company. This company provides power for over 100, 000 people in Las Vegas. Yancey has worked for his company for over 15 years and has become very successful. One day, Yancey comes in to work and finds out that the company will be downsizing and he will be out of a job in two weeks. Yancey is very angry and decides to place logic bombs, viruses, Trojans, and backdoors all over the network to take down the company once he has left. Yancey does not care if his actions land him in jail for 30 or more years, he just wants the company to pay for what they are doing to him.

What would Yancey be considered?

- A. Yancey would be considered a Suicide Hacker
- B. Since he does not care about going to jail, he would be considered a Black Hat
- C. Because Yancey works for the company currently; he would be a White Hat
- D. Yancey is a Hacktivist Hacker since he is standing up to a company that is downsizing

Answer: A

NEW QUESTION 357

Bob, a network administrator at BigUniversity, realized that some students are connecting their notebooks in the wired network to have Internet access. In the university campus, there are many Ethernet ports available for professors and authorized visitors but not for students.

He identified this when the IDS alerted for malware activities in the network. What should Bob do to avoid this problem?

- A. Disable unused ports in the switches
- B. Separate students in a different VLAN
- C. Use the 802.1x protocol

D. Ask students to use the wireless network

Answer: C

NEW QUESTION 361

Henry is a penetration tester who works for XYZ organization. While performing enumeration on a client organization, he queries the DNS server for a specific cached DNS record. Further, by using this cached record, he determines the sites recently visited by the organization's user. What is the enumeration technique used by Henry on the organization?

- A. DNS zone walking
- B. DNS cache snooping
- C. DNS SEC zone walking
- D. DNS cache poisoning

Answer: B

NEW QUESTION 363

Elliot is in the process of exploiting a web application that uses SQL as a back-end database. He's determined that the application is vulnerable to SQL injection, and has introduced conditional timing delays into injected queries to determine whether they are successful. What type of SQL injection is Elliot most likely performing?

- A. Error-based SQL injection
- B. Blind SQL injection
- C. Union-based SQL injection
- D. NoSQL injection

Answer: B

NEW QUESTION 366

Jim's company regularly performs backups of their critical servers. But the company cannot afford to send backup tapes to an off-site vendor for long-term storage and archiving. Instead, Jim's company keeps the backup tapes in a safe in the office. Jim's company is audited each year, and the results from this year's audit show a risk because backup tapes are not stored off-site. The Manager of Information Technology has a plan to take the backup tapes home with him and wants to know what two things he can do to secure the backup tapes while in transit?

- A. Encrypt the backup tapes and transport them in a lock box.
- B. Degauss the backup tapes and transport them in a lock box.
- C. Hash the backup tapes and transport them in a lock box.
- D. Encrypt the backup tapes and use a courier to transport them.

Answer: A

NEW QUESTION 369

When a security analyst prepares for the formal security assessment - what of the following should be done in order to determine inconsistencies in the secure assets database and verify that system is compliant to the minimum security baseline?

- A. Data items and vulnerability scanning
- B. Interviewing employees and network engineers
- C. Reviewing the firewalls configuration
- D. Source code review

Answer: A

NEW QUESTION 371

George is a security professional working for iTech Solutions. He was tasked with securely transferring sensitive data of the organization between industrial systems. In this process, he used a short-range communication protocol based on the IEEE 203.15.4 standard. This protocol is used in devices that transfer data infrequently at a low rate in a restricted area, within a range of 10-100 m. What is the short-range wireless communication technology George employed in the above scenario?

- A. MQTT
- B. LPWAN
- C. Zigbee
- D. NB-IoT

Answer: C

Explanation:

Zigbee could be a wireless technology developed as associate open international normal to deal with the unique desires of affordable, low-power wireless IoT networks. The Zigbee normal operates on the IEEE 802.15.4 physical radio specification and operates in unauthorised bands as well as a pair of 4 GHz, 900 MHz and 868 MHz.

The 802.15.4 specification upon that the Zigbee stack operates gained confirmation by the Institute of Electrical and physical science Engineers (IEEE) in 2003. The specification could be a packet-based radio protocol supposed for affordable, battery-operated devices. The protocol permits devices to speak in an exceedingly kind of network topologies and may have battery life lasting many years.

The Zigbee three.0 Protocol

The Zigbee protocol has been created and ratified by member corporations of the Zigbee Alliance. Over three hundred leading semiconductor makers, technology corporations, OEMs and repair corporations comprise the Zigbee Alliance membership. The Zigbee protocol was designed to supply associate easy-to-use wireless information answer characterised by secure, reliable wireless network architectures.

THE ZIGBEE ADVANTAGE

The Zigbee 3.0 protocol is intended to speak information through rip-roaring RF environments that area unit common in business and industrial applications.

Version 3.0 builds on the prevailing Zigbee normal however unifies the market-specific application profiles to permit all devices to be wirelessly connected within the same network, no matter their market designation and performance. what is more, a Zigbee 3.0 certification theme ensures the ability of product from completely different makers. Connecting Zigbee three.0 networks to the information science domain unveil observance and management from devices like smartphones and tablets on a local area network or WAN, as well as the web, and brings verity net of Things to fruition.

Zigbee protocol options include:

- Support for multiple network topologies like point-to-point, point-to-multipoint and mesh networks
- Low duty cycle – provides long battery life
- Low latency
- Direct Sequence unfold Spectrum (DSSS)
- Up to 65,000 nodes per network
- 128-bit AES encryption for secure information connections
- Collision avoidance, retries and acknowledgements

This is another short-range communication protocol based on the IEEE 203.15.4 standard. Zig-Bee is used in devices that transfer data infrequently at a low rate in a restricted area and within a range of 10–100 m.

NEW QUESTION 376

You have successfully comprised a server having an IP address of 10.10.0.5. You would like to enumerate all machines in the same network quickly. What is the best Nmap command you will use?

- A. nmap -T4 -q 10.10.0.0/24
- B. nmap -T4 -F 10.10.0.0/24
- C. nmap -T4 -r 10.10.1.0/24
- D. nmap -T4 -O 10.10.0.0/24

Answer: B

NEW QUESTION 378

A Security Engineer at a medium-sized accounting firm has been tasked with discovering how much information can be obtained from the firm's public facing web servers. The engineer decides to start by using netcat to port 80.

The engineer receives this output: HTTP/1.1 200 OK

Server: Microsoft-IIS/6

Expires: Tue, 17 Jan 2011 01:41:33 GMT

Date: Mon, 16 Jan 2011 01:41:33 GMT

Content-Type: text/html Accept-Ranges: bytes

Last Modified: Wed, 28 Dec 2010 15:32:21 GMT

ETag:"b0aac0542e25c31:89d" Content-Length: 7369

Which of the following is an example of what the engineer performed?

- A. Banner grabbing
- B. SQL injection
- C. Whois database query
- D. Cross-site scripting

Answer: A

NEW QUESTION 383

You are a security officer of a company. You had an alert from IDS that indicates that one PC on your Intranet is connected to a blacklisted IP address (C2 Server) on the Internet. The IP address was blacklisted just before the alert. You are starting an investigation to roughly analyze the severity of the situation. Which of the following is appropriate to analyze?

- A. IDS log
- B. Event logs on domain controller
- C. Internet Firewall/Proxy log.
- D. Event logs on the PC

Answer: C

NEW QUESTION 385

These hackers have limited or no training and know how to use only basic techniques or tools. What kind of hackers are we talking about?

- A. Black-Hat Hackers A
- B. Script Kiddies
- C. White-Hat Hackers
- D. Gray-Hat Hacker

Answer: B

Explanation:

Script Kiddies: These hackers have limited or no training and know how to use only basic techniques or tools. Even then they may not understand any or all of what they are doing.

NEW QUESTION 387

Boney, a professional hacker, targets an organization for financial benefits. He performs an attack by sending his session ID using an MITM attack technique.

Boney first obtains a valid session ID by logging into a service and later feeds the same session ID to the target employee. The session ID links the target employee to Boney's account page without disclosing any information to the victim. When the target employee clicks on the link, all the sensitive payment details

entered in a form are linked to Boney's account. What is the attack performed by Boney in the above scenario?

- A. Session donation attack
- B. Session fixation attack
- C. Forbidden attack
- D. CRIME attack

Answer: A

Explanation:

In a session donation attack, the attacker donates their own session ID to the target user. In this attack, the attacker first obtains a valid session ID by logging into a service and later feeds the same session ID to the target user. This session ID links a target user to the attacker's account page without disclosing any information to the victim. When the target user clicks on the link and enters the details (username, password, payment details, etc.) in a form, the entered details are linked to the attacker's account. To initiate this attack, the attacker can send their session ID using techniques such as cross-site cooking, an MITM attack, and session fixation. A session donation attack involves the following steps.

NEW QUESTION 389

A new wireless client is configured to join a 802.11 network. This client uses the same hardware and software as many of the other clients on the network. The client can see the network, but cannot connect. A wireless packet sniffer shows that the Wireless Access Point (WAP) is not responding to the association requests being sent by the wireless client. What is a possible source of this problem?

- A. The WAP does not recognize the client's MAC address
- B. The client cannot see the SSID of the wireless network
- C. Client is configured for the wrong channel
- D. The wireless client is not configured to use DHCP

Answer: A

NEW QUESTION 392

Which of the following statements about a zone transfer is correct? (Choose three.)

- A. A zone transfer is accomplished with the DNS
- B. A zone transfer is accomplished with the nslookup service
- C. A zone transfer passes all zone information that a DNS server maintains
- D. A zone transfer passes all zone information that a nslookup server maintains
- E. A zone transfer can be prevented by blocking all inbound TCP port 53 connections
- F. Zone transfers cannot occur on the Internet

Answer: ACE

NEW QUESTION 397

Which of the following tools can be used to perform a zone transfer?

- A. NSLookup
- B. Finger
- C. Dig
- D. Sam Spade
- E. Host
- F. Netcat
- G. Neotrace

Answer: ACDE

NEW QUESTION 399

Allen, a professional pen tester, was hired by xpertTech solutions to perform an attack simulation on the organization's network resources. To perform the attack, he took advantage of the NetBIOS API and targeted the NetBIOS service. By enumerating NetBIOS, he found that port 139 was open and could see the resources that could be accessed or viewed on a remote system. He came across many NetBIOS codes during enumeration.

Identify the NetBIOS code used for obtaining the messenger service running for the logged-in user?

- A. <1B>
- B. <00>
- C. <03>
- D. <20>

Answer: C

Explanation:


<03> Windows Messenger administration: Courier administration is an organization-based framework notice Windows administration by Microsoft that was remembered for some prior forms of Microsoft Windows.

This resigned innovation, despite the fact that it has a comparable name, isn't connected in any capacity to the later, Internet-based Microsoft Messenger administration for texting or to Windows Messenger and Windows Live Messenger (earlier named MSN Messenger) customer programming.

The Messenger Service was initially intended for use by framework managers to tell Windows clients about their networks.[1] It has been utilized malevolently to introduce spring up commercials to clients over the Internet (by utilizing mass-informing frameworks which sent an ideal message to a predetermined scope of IP addresses). Despite the fact that Windows XP incorporates a firewall, it isn't empowered naturally. Along these lines, numerous clients got such messages. Because of this maltreatment, the Messenger Service has been debilitated as a matter of course in Windows XP Service Pack 2.

NEW QUESTION 403

Which type of sniffing technique is generally referred as MiTM attack?

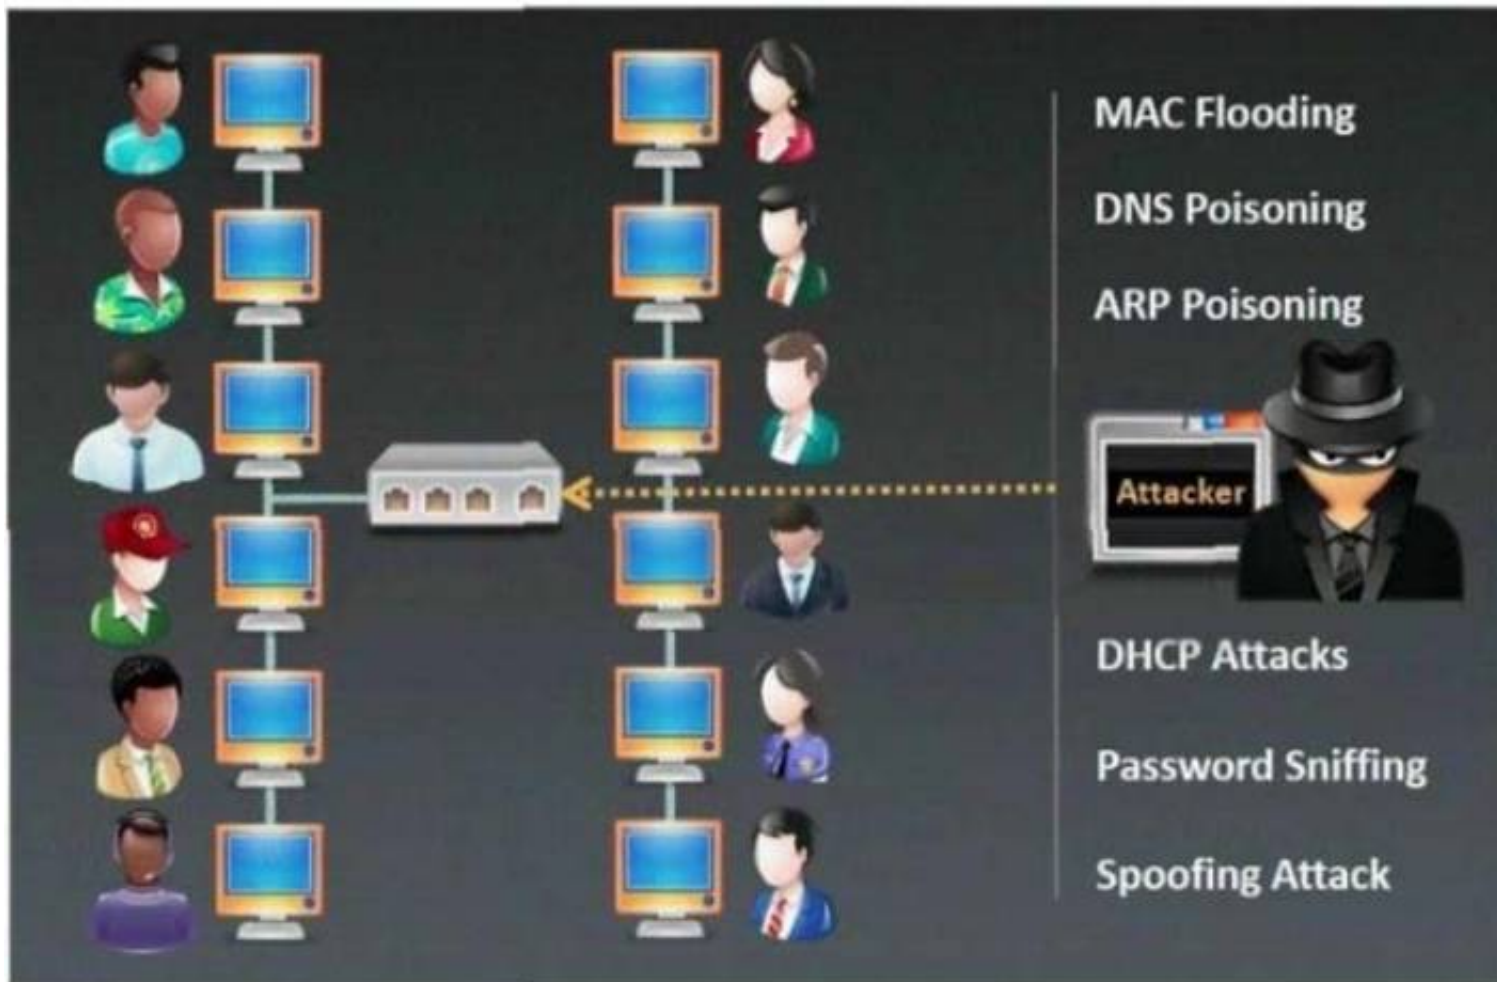

- A. Password Sniffing
- B. ARP Poisoning
- C. Mac Flooding
- D. DHCP Sniffing

Answer: B

NEW QUESTION 405

Fred is the network administrator for his company. Fred is testing an internal switch.

From an external IP address, Fred wants to try and trick this switch into thinking it already has established a session with his computer. How can Fred accomplish this?

- A. Fred can accomplish this by sending an IP packet with the RST/SIN bit and the source address of his computer.
- B. He can send an IP packet with the SYN bit and the source address of his computer.
- C. Fred can send an IP packet with the ACK bit set to zero and the source address of the switch.
- D. Fred can send an IP packet to the switch with the ACK bit and the source address of his machine.

Answer: D

NEW QUESTION 410

You have compromised a server on a network and successfully opened a shell. You aimed to identify all operating systems running on the network. However, as you attempt to fingerprint all machines in the network using the nmap syntax below, it is not going through.

```
invictus@victim_server.~$ nmap -T4 -O 10.10.0.0/24 TCP/IP fingerprinting (for OS scan) xxxxxxxx xxxxxx
```

xc. QUITTING!

What seems to be wrong?

- A. The nmap syntax is wrong.
- B. This is a common behavior for a corrupted nmap application.
- C. The outgoing TCP/IP fingerprinting is blocked by the host firewall.
- D. OS Scan requires root privileges.

Answer: D

NEW QUESTION 414

Joel, a professional hacker, targeted a company and identified the types of websites frequently visited by its employees. Using this information, he searched for possible loopholes in these websites and injected a malicious script that can redirect users from the web page and download malware onto a victim's machine. Joel waits for the victim to access the infected web application so as to compromise the victim's machine. Which of the following techniques is used by Joel in the above scenario?

- A. DNS rebinding attack
- B. Clickjacking attack
- C. MarioNet attack
- D. Watering hole attack

Answer: B

NEW QUESTION 415

Which of the following is a low-tech way of gaining unauthorized access to systems?

- A. Social Engineering
- B. Eavesdropping
- C. Scanning
- D. Sniffing

Answer: A

NEW QUESTION 417

Which of the following is the structure designed to verify and authenticate the identity of individuals within the enterprise taking part in a data exchange?

- A. SOA
- B. biometrics
- C. single sign on
- D. PKI

Answer: D

NEW QUESTION 418

You work for Acme Corporation as Sales Manager. The company has tight network security restrictions. You are trying to steal data from the company's Sales database (Sales.xls) and transfer them to your home computer. Your company filters and monitors traffic that leaves from the internal network to the Internet. How will you achieve this without raising suspicion?

- A. Encrypt the Sales.xls using PGP and e-mail it to your personal gmail account
- B. Package the Sales.xls using Trojan wrappers and telnet them back your home computer
- C. You can conceal the Sales.xls database in another file like photo.jpg or other files and send it out in an innocent looking email or file transfer using Steganography techniques
- D. Change the extension of Sales.xls to sales.txt and upload them as attachment to your hotmail account

Answer: C

NEW QUESTION 419

Susan, a software developer, wants her web API to update other applications with the latest information. For this purpose, she uses a user-defined HTTP tailback or push APIs that are raised based on trigger events: when invoked, this feature supplies data to other applications so that users can instantly receive real-time Information.

Which of the following techniques is employed by Susan?

- A. web shells
- B. Webhooks
- C. REST API
- D. SOAP API

Answer: B

Explanation:

Webhooks are one of a few ways internet applications will communicate with one another.

It allows you to send real-time data from one application to another whenever a given event happens.

For example, let's say you've created an application using the Foursquare API that tracks when people check into your restaurant. You ideally wish to be able to greet customers by name and provide a complimentary drink when they check in.

What a webhook will is notify you any time someone checks in, therefore you'd be able to run any processes that you simply had in your application once this event is triggered.

The data is then sent over the web from the application wherever the event originally occurred, to the receiving application that handles the data.

Here's a visual representation of what that looks like:



A webhook url is provided by the receiving application, and acts as a phone number that the other application will call once an event happens.

Only it's more complicated than a phone number, because data about the event is shipped to the webhook url in either JSON or XML format. this is known as the "payload."

Here's an example of what a webhook url looks like with the payload it's carrying:

```

https://yourapp.com/data/12345?customer=Bob&value=10.99&item=paper
To: yourapp.com/data/12345
Customer: Bob
Value: 10.99
Item: Paper
  
```

What are Webhooks? Webhooks are user-defined HTTP callback or push APIs that are raised based on events triggered, such as comment received on a post and pushing code to the registry. A webhook allows an application to update other applications with the latest information. Once invoked, it supplies data to the other applications, which means that users instantly receive real-time information. Webhooks are sometimes called "Reverse APIs" as they provide what is required for API specification, and the developer should create an API to use a webhook. A webhook is an API concept that is also used to send text messages and notifications to mobile numbers or email addresses from an application when a specific event is triggered. For instance, if you search for something in the online store and the required item is out of stock, you click on the "Notify me" bar to get an alert from the application when that item is available for purchase. These notifications from the applications are usually sent through webhooks.

NEW QUESTION 421

Tony is a penetration tester tasked with performing a penetration test. After gaining initial access to a target system, he finds a list of hashed passwords. Which of the following tools would not be useful for cracking the hashed passwords?

- A. John the Ripper
- B. Hashcat
- C. netcat
- D. THC-Hydra

Answer: A

NEW QUESTION 425

You are a penetration tester working to test the user awareness of the employees of the client xyz. You harvested two employees' emails from some public sources and are creating a client-side backdoor to send it to the employees via email. Which stage of the cyber kill chain are you at?

- A. Reconnaissance
- B. Command and control
- C. Weaponization
- D. Exploitation

Answer: C

Explanation:

Weaponization

The adversary analyzes the data collected in the previous stage to identify the vulnerabilities and techniques that can exploit and gain unauthorized access to the target organization. Based on the vulnerabilities identified during analysis, the adversary selects or creates a tailored deliverable malicious payload (remote-access malware weapon) using an exploit and a backdoor to send it to the victim. An adversary may target specific network devices, operating systems, endpoint devices, or even individuals within the organization to carry out their attack. For example, the adversary may send a phishing email to an employee of the target organization, which may include a malicious attachment such as a virus or worm that, when downloaded, installs a backdoor on the system that allows remote access to the adversary. The following are the activities of the adversary:

- o Identifying appropriate malware payload based on the analysis
- o Creating a new malware payload or selecting, reusing, modifying the available malware payloads based on the identified vulnerability
- o Creating a phishing email campaign
- o Leveraging exploit kits and botnets

NEW QUESTION 427

In the field of cryptanalysis, what is meant by a “rubber-hose” attack?

- A. Forcing the targeted keystream through a hardware-accelerated device such as an ASIC.
- B. A backdoor placed into a cryptographic algorithm by its creator.
- C. Extraction of cryptographic secrets through coercion or torture.
- D. Attempting to decrypt ciphertext by making logical assumptions about the contents of the original plaintext.

Answer: C

NEW QUESTION 429

You are tasked to configure the DHCP server to lease the last 100 usable IP addresses in subnet to. 1.4.0/23. Which of the following IP addresses could be teased as a result of the new configuration?

- A. 210.1.55.200
- B. 10.1.4.254
- C. 10..1.5.200
- D. 10.1.4.156

Answer: C

NEW QUESTION 431

Which of the following describes the characteristics of a Boot Sector Virus?

- A. Modifies directory table entries so that directory entries point to the virus code instead of the actual program.
- B. Moves the MBR to another location on the RAM and copies itself to the original location of the MBR.
- C. Moves the MBR to another location on the hard disk and copies itself to the original location of the MBR.
- D. Overwrites the original MBR and only executes the new virus code.

Answer: C

NEW QUESTION 432

Juliet, a security researcher in an organization, was tasked with checking for the authenticity of images to be used in the organization's magazines. She used these images as a search query and tracked the original source and details of the images, which included photographs, profile pictures, and memes. Which of the following footprinting techniques did Rachel use to finish her task?

- A. Reverse image search
- B. Meta search engines
- C. Advanced image search
- D. Google advanced search

Answer: C

NEW QUESTION 437

If you want to only scan fewer ports than the default scan using Nmap tool, which option would you use?

- A. -r
- B. -F
- C. -P
- D. -sP

Answer: B

NEW QUESTION 441

Which utility will tell you in real time which ports are listening or in another state?

- A. Netstat
- B. TCPView
- C. Nmap
- D. Loki

Answer: B

NEW QUESTION 445

The configuration allows a wired or wireless network interface controller to pass all traffic it receives to the Central Processing Unit (CPU), rather than passing only the frames that the controller is intended to receive. Which of the following is being described?

- A. Multi-cast mode
- B. Promiscuous mode
- C. WEM
- D. Port forwarding

Answer: B

NEW QUESTION 450

This wireless security protocol allows 192-bit minimum-strength security protocols and cryptographic tools to protect sensitive data, such as GCMP-256, MMAC-SHA384, and ECDSA using a 384-bit elliptic curve. Which is this wireless security protocol?

- A. WPA2 Personal
- B. WPA3-Personal
- C. WPA2-Enterprise
- D. WPA3-Enterprise

Answer: D

Explanation:

Enterprise, governments, and financial institutions have greater security with WPA3-Enterprise.

WPA3-Enterprise builds upon WPA2 and ensures the consistent application of security protocol across the network. WPA3-Enterprise also offers an optional mode using 192-bit minimum-strength security protocols and cryptographic tools to protect sensitive data:

- Authenticated encryption: 256-bit Galois/Counter Mode Protocol (GCMP-256)
- Key derivation and confirmation: 384-bit Hashed Message Authentication Code (HMAC) with Secure Hash Algorithm (HMAC-SHA384)
- Key establishment and authentication: Elliptic Curve Diffie-Hellman (ECDH) exchange and Elliptic Curve Digital Signature Algorithm (ECDSA) employing a 384-bit elliptic curve
- Robust management frame protection: 256-bit Broadcast/Multicast Integrity Protocol Galois Message Authentication Code (BIP-GMAC-256)

The 192-bit security mode offered by WPA3-Enterprise ensures the proper combination of cryptographic tools are used and sets a uniform baseline of security within a WPA3 network.

It protects sensitive data using many cryptographic algorithms. It provides authenticated encryption using GCMP-256. It uses HMAC-SHA-384 to generate cryptographic keys. It uses ECDSA-384 for exchanging keys.

NEW QUESTION 453

An attacker redirects the victim to malicious websites by sending them a malicious link by email. The link appears authentic but redirects the victim to a malicious web page, which allows the attacker to steal the victim's data. What type of attack is this?

- A. Phishing
- B. Vishing
- C. Spoofing
- D. DDoS

Answer: A

NEW QUESTION 455

Peter, a system administrator working at a reputed IT firm, decided to work from his home and login remotely. Later, he anticipated that the remote connection could be exposed to session hijacking. To curb this possibility, he implemented a technique that creates a safe and encrypted tunnel over a public network to securely send and receive sensitive information and prevent hackers from decrypting the data flow between the endpoints. What is the technique followed by Peter to send files securely through a remote connection?

- A. DMZ
- B. SMB signing
- C. VPN
- D. Switch network

Answer: C

NEW QUESTION 459

While testing a web application in development, you notice that the web server does not properly ignore the "dot dot slash" (../) character string and instead

returns the file listing of a folder structure of the server.
What kind of attack is possible in this scenario?

- A. Cross-site scripting
- B. Denial of service
- C. SQL injection
- D. Directory traversal

Answer: D

Explanation:

Appropriately controlling admittance to web content is significant for running a safe web worker. Index crossing or Path Traversal is a HTTP assault which permits aggressors to get to limited catalogs and execute orders outside of the web worker's root registry.

Web workers give two primary degrees of security instruments

- > Access Control Lists (ACLs)
- > Root index

An Access Control List is utilized in the approval cycle. It is a rundown which the web worker's manager uses to show which clients or gatherings can get to, change or execute specific records on the worker, just as other access rights.

The root registry is a particular index on the worker record framework in which the clients are kept. Clients can't get to anything over this root.

For instance: the default root registry of IIS on Windows is C:\inetpub\wwwroot and with this arrangement, a client doesn't approach C:\Windows yet approaches C:\inetpub\wwwroot\news and some other indexes and documents under the root catalog (given that the client is confirmed by means of the ACLs).

The root index keeps clients from getting to any documents on the worker, for example, C:\WINDOWS\system32\win.ini on Windows stages and the/and so on/passwd record on Linux/UNIX stages.

This weakness can exist either in the web worker programming itself or in the web application code.

To play out a registry crossing assault, all an assailant requires is an internet browser and some information on where to aimlessly discover any default documents and registries on the framework.

What an assailant can do if your site is defenselessWith a framework defenseless against index crossing, an aggressor can utilize this weakness to venture out of the root catalog and access different pieces of the record framework. This may enable the assailant to see confined documents, which could give the aggressor more data needed to additional trade off the framework.

Contingent upon how the site access is set up, the aggressor will execute orders by mimicking himself as the client which is related with "the site". Along these lines everything relies upon what the site client has been offered admittance to in the framework.

Illustration of a Directory Traversal assault by means of web application codeIn web applications with dynamic pages, input is generally gotten from programs through GET or POST solicitation techniques. Here is an illustration of a HTTP GET demand URL

GET

`http://test.webarticles.com/show.asp?view=oldarchive.html HTTP/1.1 Host: test.webarticles.com`

With this URL, the browser requests the dynamic page show.asp from the server and with it also sends the parameter view with the value of oldarchive.html. When this request is executed on the web

server, show.asp retrieves the file oldarchive.html from the server's file system, renders it and then sends

back to the browser which displays it to the user. The attacker would assume that show.asp can retrieve files from the file system and sends the following custom URL.

GET

`http://test.webarticles.com/show.asp?view=../../../../../Windows/system.ini HTTP/1.1 Host: test.webarticles.com`

This will cause the dynamic page to retrieve the file system.ini from the file system and display it to the user The expression ../ instructs the system to go one directory up which is commonly used as an operating system directive. The attacker has to guess how many directories he has to go up to find the Windows folder on the system, but this is easily done by trial and error.

Example of a Directory Traversal attack via web serverApart from vulnerabilities in the code, even the web server itself can be open to directory traversal attacks.

The problem can either be incorporated into the web server software or inside some sample script files left available on the server.

The vulnerability has been fixed in the latest versions of web server software, but there are web servers online which are still using older versions of IIS and Apache which might be open to directory traversal attacks. Even though you might be using a web server software version that has fixed this vulnerability, you might still have some sensitive default script directories exposed which are well known to hackers.

For example, a URL request which makes use of the scripts directory of IIS to traverse directories and execute a command can be

GET

`http://server.com/scripts/..%5c../Windows/System32/cmd.exe?/c+dir+c:\ HTTP/1.1 Host: server.com`

The request would return to the user a list of all files in the C:\ directory by executing the cmd.exe comm shell file and run the command dir c:\ in the shell. The %5c expression that is in the URL request is a we server escape code which is used to represent normal characters. In this case %5c represents the character \ Newer versions of modern web server software check for these escape codes and do not let them through. Some older versions however, do not filter out these codes in the root directory enforcer and will let the attackers execute such commands.

NEW QUESTION 460

.....

Thank You for Trying Our Product

We offer two products:

1st - We have Practice Tests Software with Actual Exam Questions

2nd - Questions and Answers in PDF Format

312-50v11 Practice Exam Features:

- * 312-50v11 Questions and Answers Updated Frequently
- * 312-50v11 Practice Questions Verified by Expert Senior Certified Staff
- * 312-50v11 Most Realistic Questions that Guarantee you a Pass on Your FirstTry
- * 312-50v11 Practice Test Questions in Multiple Choice Formats and Updatesfor 1 Year

100% Actual & Verified — Instant Download, Please Click
[Order The 312-50v11 Practice Test Here](#)